

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal


Solar Panel Guide Specification Data Sheet

Ameresco Solar LLC (Southwest PV)

190J / 200J

190J

Also available on the web at
EnergyPal.com/amesco-solar-llc-southwest-pv-solar-panels/190j

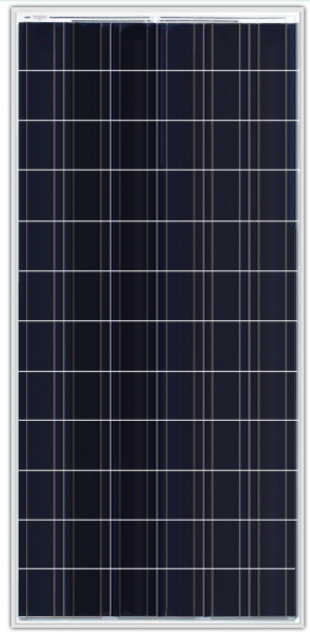

190W and 200W Photovoltaic modules 190J and 200J

This line of modules is the direct result of over three decades of design, manufacturing and use. Attending to every detail in the design and manufacture of our products, our process controls and testing methods have optimized module life and electrical energy production.

Ameresco Solar's off-grid module line offers the following features and benefits:

► **Built to last**

From mountaintops to off-shore platforms, on weather stations in the bitter cold of Antarctica and on telephone signal repeaters in the hot Australian outback, the technology has been proven in the harshest environments.




► **Accessible junction box for off-grid connections**

J-type junction box has accessible terminals for easier module interconnections in off-grid applications, and it allows fitting cable glands for various sections.



► **Thick, durable scratch resistant back sheet**

The thick back sheet provides extra insulation and increased resistance to protect your module against rough handling. Made of white polyester, it ensures longer term performance and increased energy production.



► **High reliability**

Cell interconnections and diode placement use well-established industry practice and are field-proven to provide excellent reliability.

► **Quality and certifications**

ISO 9001

ISO 9001 factory certification ensures that our manufacturing facilities use proven manufacturing and quality control processes.



Certified to IEC 61215 and 61730



Certified to UL1703 and ULC1703
Certified for use in Class 1, Division 2 Hazardous locations



Conforms with European Directive 2006/95/EC

190W AND 200W PHOTOVOLTAIC MODULES 190J AND 200J

Electrical characteristics

190J / 200J

(1) STC 1000W/m² (2) NOCT 800W/m²

Maximum power (P_{max})	190W / 200W	137W / 144W
Voltage at P_{max} (V_{mpp})	38.0V / 38.0V	34.0V / 34.0V
Current at P_{max} (I_{mpp})	5.0A / 5.3A	4.0A / 4.2A
Short circuit current (I_{sc})	5.5A / 5.8A	4.5A / 4.7A
Open circuit voltage (V_{oc})	45.3V / 45.3V	41.0V / 41.0V
Module efficiency	15.2% / 16.0%	
Tolerance (P_{max})		±5%
Nominal voltage		24V
Efficiency reduction at 200W/m ²	<5% reduction efficiency 14.4% / 15.2%	
Limiting reverse current	5.50 / 5.8	
Temperature coefficient of I_{sc}	0.105%/°C	
Temperature coefficient of V_{oc}	-0.360%/°C	
Temperature coefficient of (P_{max})	-0.45%/°C	
(3) NOCT	47±2°C	
Maximum series fuse rating	20A	

Application class (according to IEC 61730:2007) Class C

Maximum system voltage 600V (U.S. NEC) / 1000V (IEC 61730:2007)

1: Values at Standard Test Conditions (STC): 1000W/m² irradiance, AM1.5 solar spectrum and 25°C module temperature

2: Values at 800W/m² irradiance, Nominal Operation Cell Temperature (NOCT) and AM1.5 solar spectrum

3: Nominal Operation Cell Temperature: Module operation temperature at 800W/m² irradiance, 20°C air temperature, 1m/s wind speed

Mechanical characteristics

Solar cells	72 crystalline 5" silicon cells (125 x 125mm) in series
Front cover	High transmission 3.2mm (1/8th in) glass
Encapsulant	EVA
Back cover	White polyester
Frame	Silver anodized aluminum (Universal II)
Junction box	IP65 with 4 terminal screw connection block; accepts PG 13.5, M20 13mm (1/2") conduit, or cable fittings accepting 6-12mm diameter cable. Terminals accept 2.5-10mm ² (8-14 AWG) wire
Dimensions	1587 x 790 x 50mm / 62.5 x 31.1 x 2in
Weight	15.4kg / 33.95lbs

All dimensional tolerances within ±1% unless otherwise stated.

Warranty*

- ▶ Free from defects in materials and workmanship for 2 years
- ▶ 90% min. power output over 12 years
- ▶ Optional 25 years available

* Refer to warranty document for terms and conditions.

Certification




Certified according to the extended version of the IEC 61215 (ed.2), EN 61215:2005-08 (Crystalline silicon terrestrial photovoltaic modules - Design qualification and type approval).

Certified according to IEC 61730-1 and IEC 61730-2 (ed.1), EN 61730-1:2007-05 and EN 61730-2:2007-05. (Photovoltaic module safety qualification, requirements for construction and testing).

Listed to UL 1703 & ULC ORD-C1703 Standard for Safety by Intertek ETL. Class C Fire Rating.


Approved by Intertek ETL according to FM 3611, Dec 2004, and according to CAN/CSA C22.2 No. 213-M1987, 1st Edition, Reaffirmed 2004, for use in a Class I, Division 2, Group A, B, C, D Hazardous (Classified) Location.

AMERESCO SOLAR
Green • Clean • Sustainable

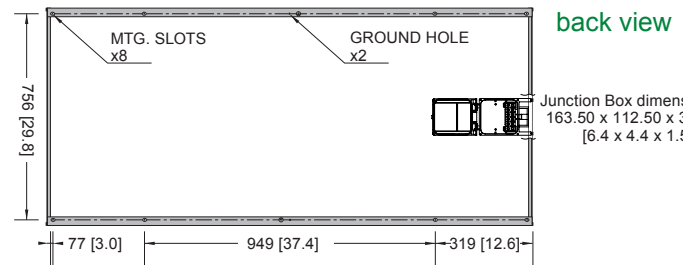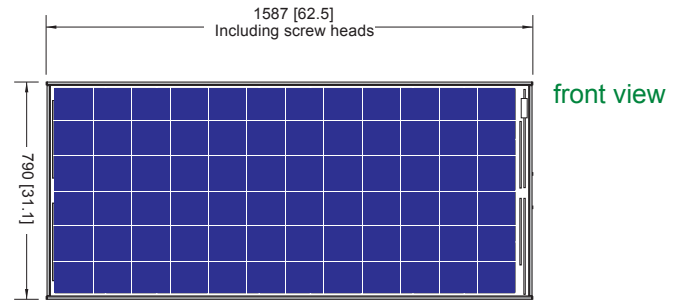


Dimensions in mm [in].

Temperature - dependence of performance (190 module)

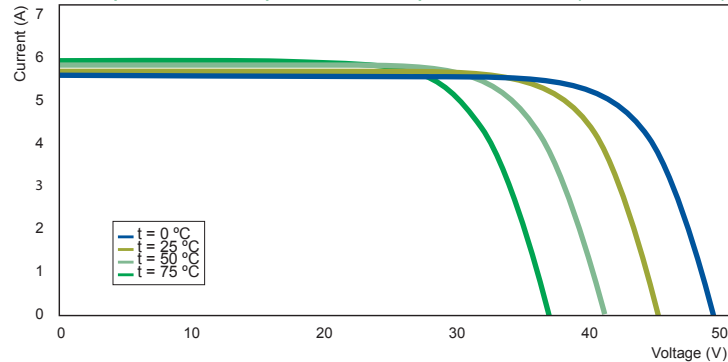

Irradiance - dependence of performance (190 module)

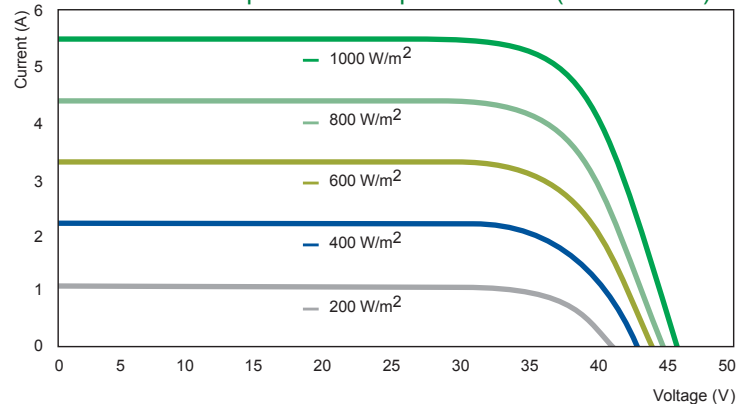

For more information, call 855-43-SOLAR or visit www.amerescosolar.com.

This publication summarises product warranty and specifications which are subject to change without notice. © 2015 Ameresco, Inc. Ameresco and the Ameresco logo, the orb symbol and the tagline "Green. Clean. Sustainable." are registered in the U.S. Patent and Trademark Office. All rights reserved. PS-4870-01-3/15 03 00.0