

**For a Free Quote:**

Web: [EnergyPal.com](https://energypal.com)

Call: **1-800-990-3725**

Email: **contact@energypal.com**



**Solar Panel Guide**

**Specification Data Sheet**

Learn more at [energypal.com/best-solar-panels-for-homes](https://energypal.com/best-solar-panels-for-homes)



# Naps Saana 245-255 M3 MBB

Naps Systems' 30 years of solar power experience in all continents and conditions provide the highest level of quality and power in an attractive and dependable package.

## High power and efficiency

Naps Saana series of solar modules contain 60 high efficiency, almost black semisquare monocrystalline solar cells. The cells are carefully selected to assure a narrow and positive power range, thus minimising mismatch losses in the system.

The high transmission structured glass has a light texture on the front and a deeper texture inside, which improves the adhesion of the EVA encapsulant. This combination of textures also gives improvement to the performance of the solar module compared to smooth glass.

## Dependable construction and long life

Featuring the highest standards of construction and materials, Naps Saana solar modules are able to withstand the harshest environments and continue to perform efficiently. Properly installed, these modules have a design life well beyond the power warranty. Limited power warranties are given for both 10 and 25 years. The modules are tested to meet or exceed all relevant international standards and the highest requirements for quality and performance.



Glass type:

Frame colour:

Backsheet colour:

MATT

BLACK

BLACK

- Carefully selected semisquare monocrystalline silicon solar cells for close tolerance
- Solar cells treated for reduced reflection and for efficient conversion of both direct and diffuse light
- Electrical circuit laminated between layers of ethylene vinyl acetate (EVA) for electrical isolation, moisture resistance and UV stability
- Low iron content, tempered glass for mechanical protection and high light transmission
- The light textured surface of the matt glass improves the performance of the module
- The deep texture inside of the glass improves the adhesion of the EVA encapsulant
- Multi-layered polymer backsheet for resistance to abrasion, tears and punctures and dependable electrical insulation
- Rugged and lightweight anodised aluminium frame with mounting, grounding and drainage holes
- Junction box with pre-fitted cables and quick connectors designed for ease and safety
- Wired-in bypass diodes to reduce potential loss of power and damage from partial array shading
- Tested for a wide range of operating conditions (-40°C to +85°C)
- Tested to withstand the highest wind, hail storm and snow load requirements (5400 N/m<sup>2</sup>)
- Designed to meet or exceed the environmental requirements of IEC61215
- Designed to meet the requirements of IEC61730, including Safety Class II to IEC61140

**NAPS**   
Power of Light



# Specifications

## Performance at STC


	245 M3 MBB	250 M3 MBB	255 M3 MBB
Maximum power (W/P <sub>max</sub> )	245	250	255
Maximum power tolerance (W)	+5/-0	+5/-0	+5/-0
Current (typical at max power) (A/I <sub>p</sub> )	7.98	8.08	8.17
Voltage (typical at max power) (V/V <sub>p</sub> )	30.7	31.0	31.2
Short circuit current (typical) (A/I <sub>sc</sub> )	8.54	8.57	8.60
Open circuit voltage (typical) (V/V <sub>oc</sub> )	37.7	37.9	38.2
Module efficiency (minimum) (%)	15.3	15.6	15.9
Module efficiency (maximum) (%)	15.6	15.9	16.2

## Performance at NOCT and 800 W/m<sup>2</sup>

	245 M3 MBB	250 M3 MBB	255 M3 MBB
Maximum power (W/P <sub>max</sub> )	178.3	182.4	186.5
Current (typical at max power) (A/I <sub>p</sub> )	6.36	6.45	6.54
Voltage (typical at max power) (V/V <sub>p</sub> )	28.0	28.3	28.5
Short circuit current (typical) (A/I <sub>sc</sub> )	6.93	6.95	6.97
Open circuit voltage (typical) (V/V <sub>oc</sub> )	34.9	35.2	35.5



## Module Dimensions

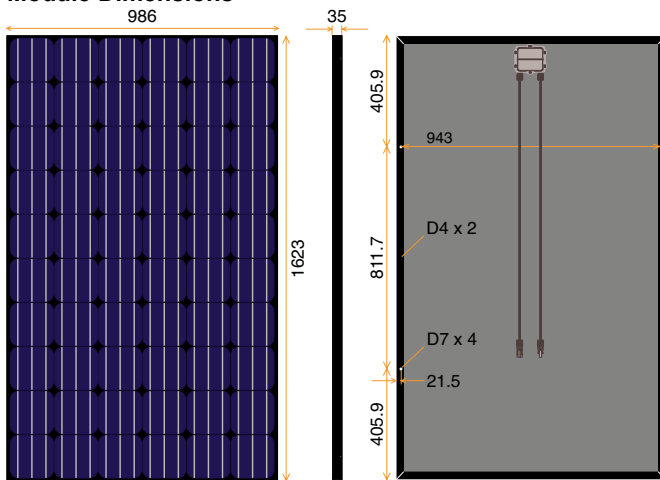

## Mechanical Details

Overall length (mm)	1623
Overall width (mm)	986
Area (m <sup>2</sup> )	1.601
Thickness at edge (mm)	35
Weight (kg)	21.1

## Construction

Cell type	monocrystalline 3BB
Cells	60
Cell dimensions (mm)	156 x 156 pseudosquare
Cell electrical circuit (series x parallel)	60 x 1
Cell layout (horizontal x vertical)	6 x 10
Glass thickness (mm)	4.0
Junction box type	Hercules HBH
Bypass diodes factory fitted	3
Cables (4.0 mm <sup>2</sup> )	2 x 1 m
Connector type	H4C
Other connector options available to special order	

## Protection Class

IEC61730 Application Class A, equivalent to Safety Class II

## Maximum System Voltage

Voltage (V)	1000
-------------	------

## Overcurrent Protection

Series fuse protection rating (A)	15
Reverse current maximum (A)	15

## Mechanical Load

Tested to (N/m <sup>2</sup> = Pa)	5400
According to IEC 61215-2 extended test for heavy snow load	

## Temperature Coefficients at STC

Open circuit voltage (V/K)	-0.124
Short circuit current (A/K)	0.0043
Maximum power (%/K)	-0.42

## Efficiency Reduction from STC

Reduction (approximately) (%)	4
Cell temperature (°C)	25
Irradiance change (W/m <sup>2</sup> )	from 1000 to 200
Air Mass	1.5

## STC = Standard Test Conditions


Cell temperature (°C)	25
Irradiation (W/m <sup>2</sup> )	1000
Air Mass	1.5

## NOCT = Normal Operating Cell Temperature

Cell temperature (°C)	46
Irradiation (W/m <sup>2</sup> )	800
Ambient temperature (°C)	20
Wind speed (m/s)	≤1
Free air access to module rear	


## Voltage / Current Dependence on Temperature

1 kW/m<sup>2</sup> IRRADIANCE, VARYING CELL TEMPERATURE (°C) (TYPICAL FOR SAANA 250 M3 MBB)

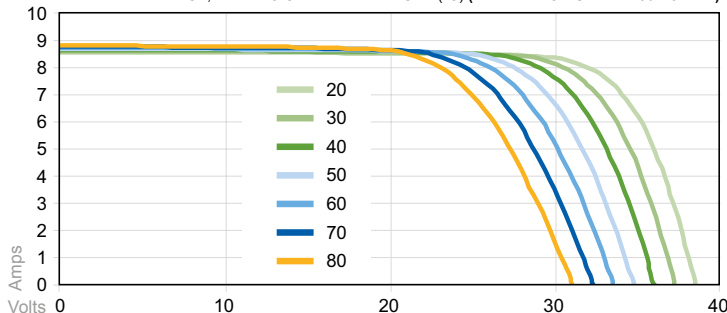

## Voltage / Current Dependence on Irradiance

25°C CELL TEMPERATURE, VARYING IRRADIANCE (W/m<sup>2</sup>) (TYPICAL FOR SAANA 250 M3 MBB)

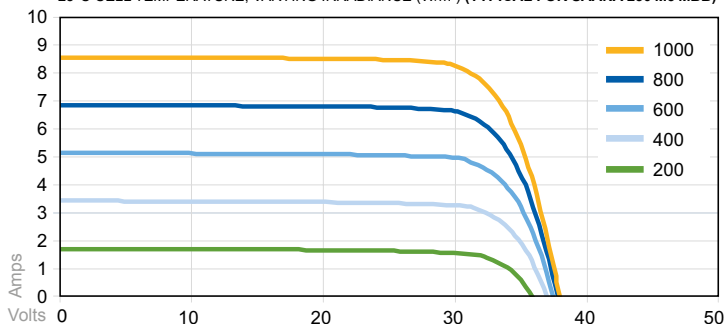

Made in EU

