

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Shenzhen Shine Solar Co., Ltd.

SN-H300W

300W


Also available on the web at
EnergyPal.com/shenzhen-shine-solar-co-ltd-solar-panels/300w

300 Watt Semi Flexible Solar Panel

Made with high efficiency sunpower back-contact solar cells


Electrical Characteristics

Max Power	Pmax	300W
Max Power Voltage	Vmp	55.0V
Max Power Current	Imp	5.5A
Open Circuit Voltage	Voc	66.0V
Short Circuit Current	Isc	6.5A
Maximum System Voltage		600V
Series Fuse Rating		10A
Temperature Co-efficients		
	Power	-0.38%/°C
	Voltage	-60.8mV/°C
	Current	2.2mA/°C
Cell Efficiency		19.00%
Number of Cells in Series		98
Max Power tolerance		±5%

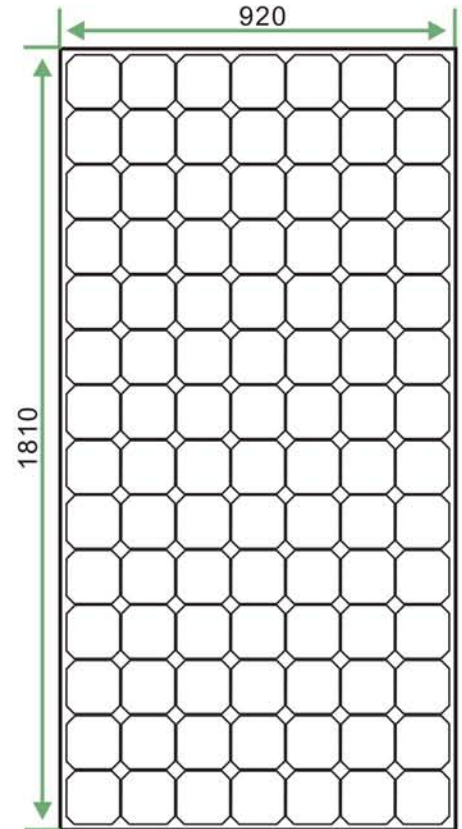

Mechanical Characteristics

Weight	6.5KG
Dimension	1810*920*3mm
Cable	4.0mm ² 90cm with MC4 Connector

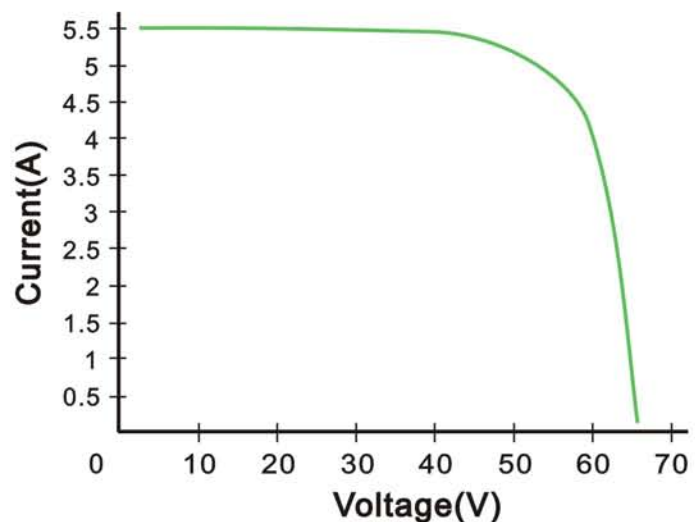

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)