

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com


EnergyPal

Solar Panel Guide Specification Data Sheet

**Jiangsu Guoyang Photoelectric Technology Co.,
Ltd.
6P-200-220
6P-220**

Also available on the web at
EnergyPal.com/jiangsu-guoyang-photoelectric-technology-co-ltd-solar-panels/6p-220

POLYCRYSTALLINE SILICON MODULE

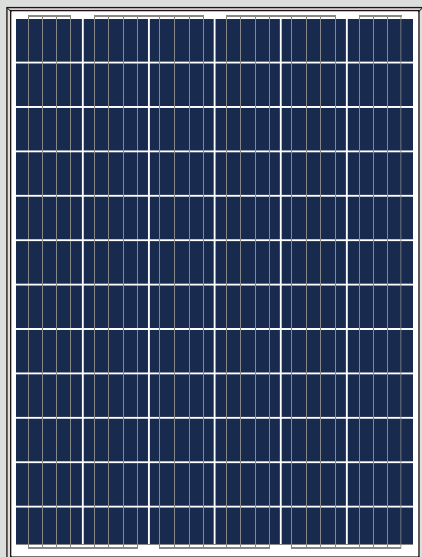

0260



10 years
products
warranty

25 year
power output
warranty

Add: CuiBei Industrial Park, Henglin Town, Wujin District, Changzhou City, Jiangsu Province, China.

Tel: +86-519-85260699

Fax: +86-519-85260299

Email: info@gsunp.com

Web Side: www.gsunp.com

GSUNpower

WWW.GSUNP.COM

6P-200 6P-210 6P-220 POLYCRYSTALLINE SILICON MODULE

Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w

Warranty

- 10 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty


Comprehensive Certificates

- ISO Certificate
- SGS-TUV Certificate
- CQC Certificate
- IEC61215、IEC61730 Certificate
- CE Certificate


Specifications subject to technology and test conditions,
GSUN Power reserves the right of final interpretation

6P-200 6P-210 6P-220

▼ Engineering Drawings (Front Side)

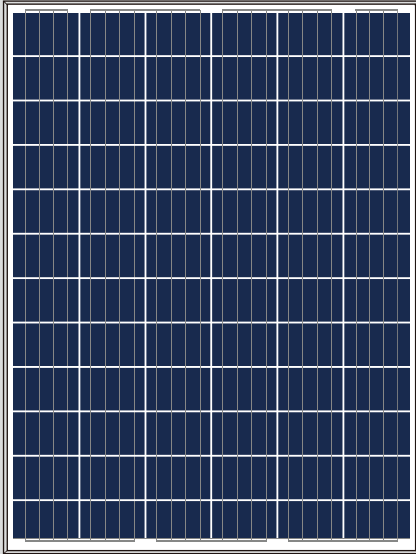

▼ Engineering Drawings (Back Side)

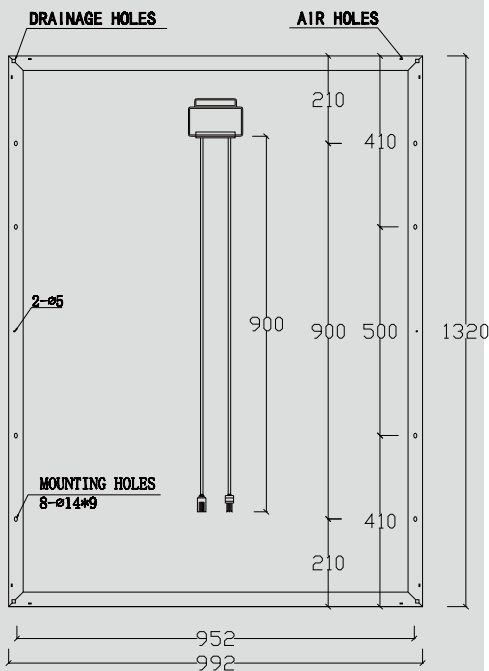

Add: CuiBei Industrial Park, Henglin Town, Wujin District, Changzhou City, Jiangsu Province, China.

Tel: +86-519-85260699

Fax: +86-519-85260299

Email: info@gsunp.com

Web Side: www.gsunp.com

Raw materials and Mechanical Parameters

	6P-200	6P-210	6P-220
Type of Cells(mm)		poly156 × 104	
NO. of Cells and Connections		6 × 12=72	
Dimensions(mm)(L*W*H)		1320 × 992 × 35/40	
Weight(kg)		14.9/15.2	
Glass		3.2mm Tempered Glass	
Encapsulation		EVA	
Backsheet		Multilayer Composite	
Aluminium-Frame		Silvery/Black Anodized aluminium alloy	
Junction-Box		IP65/IP67	
Cable		4mm ² , 900mm	
Connector		MC4 and MC4 Compatible	
Package Configuration		30/26pcs/pallet	

Performance Parameters

	6P-200	6P-210	6P-220
Maximum System Voltage		1000V	
Operating Temperature		-45~+80°C	
Maximum Series Fuse		10A	
Maximum Static Load, Front Side (e.x. Snow, Wind)		5400PA	
Maximum Static Load, Back Side (e.x. Wind)		2400PA	
Application Grade		Class A	

Electrical Parameters (Standard Test Condition)

	6P-200	6P-210	6P-220
Rated Maximum Power(Mp)	200W	210W	220W
Power Tolerance		0~ +5W	
Cell Efficiency	17.2%	18.1%	18.80%
Open Circuit Voltage(Voc)	45.2V	45.9V	45.9V
Maximum Power Voltage(Vmp)	36.2V	36.6V	36.8V
Short Circuit Current(Isc)	5.86A	6.08A	6.35A
Maximum Power Current(Imp)	5.52A	5.75A	5.99A
Temperature Coefficient of Isc		+0.06%	
Temperature Coefficient of Voc		-0.33%	
Temperature Coefficient of Pmp		-0.45%	
Standard Test Condition	Irradiance: 1000W/M2, Cell Temperature: 25°C, Spectrum AM: 1.5		

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.