

**For a Free Quote:**

Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)

Call: 1-800-990-3725

Email: [contact@energypal.com](mailto:contact@energypal.com)

# EnergyPal

## Solar Panel Guide Specification Data Sheet

**AE Solar**  
**AEXXHM6L-60 320-340W (AU)**  
**AE330HM6L-60**

Also available on the web at  
[EnergyPal.com/ae-solar-solar-panels/ae330hm6l-60](http://EnergyPal.com/ae-solar-solar-panels/ae330hm6l-60)

PERC Technology

# AEXXXHM6L-60

AE SOLAR High Efficiency Monocrystalline Half-cut Cell Solar Module with Perc Technonoly

320-340W



### Higher Module Efficiency

Brings 5-10W power gain due to half-cut production system



### More Energy Yield

Lower NMOT and better temperature coefficient by lower cell series resistance, helps boost energy yield



### Lower Operating Temperature, More Reliable

Lower operating temperature and hot spot temperature during the sunny day, making the module prevail during the sunny days




### Better Shading Tolerance

Thanks to Paralleling circuit design, more power generated under shading condition and during morning & evening time




### Better Micro Crack Resistance

Minimize the impact by micro crack by limiting cell damage and potentially extending area by half-cut module architecture

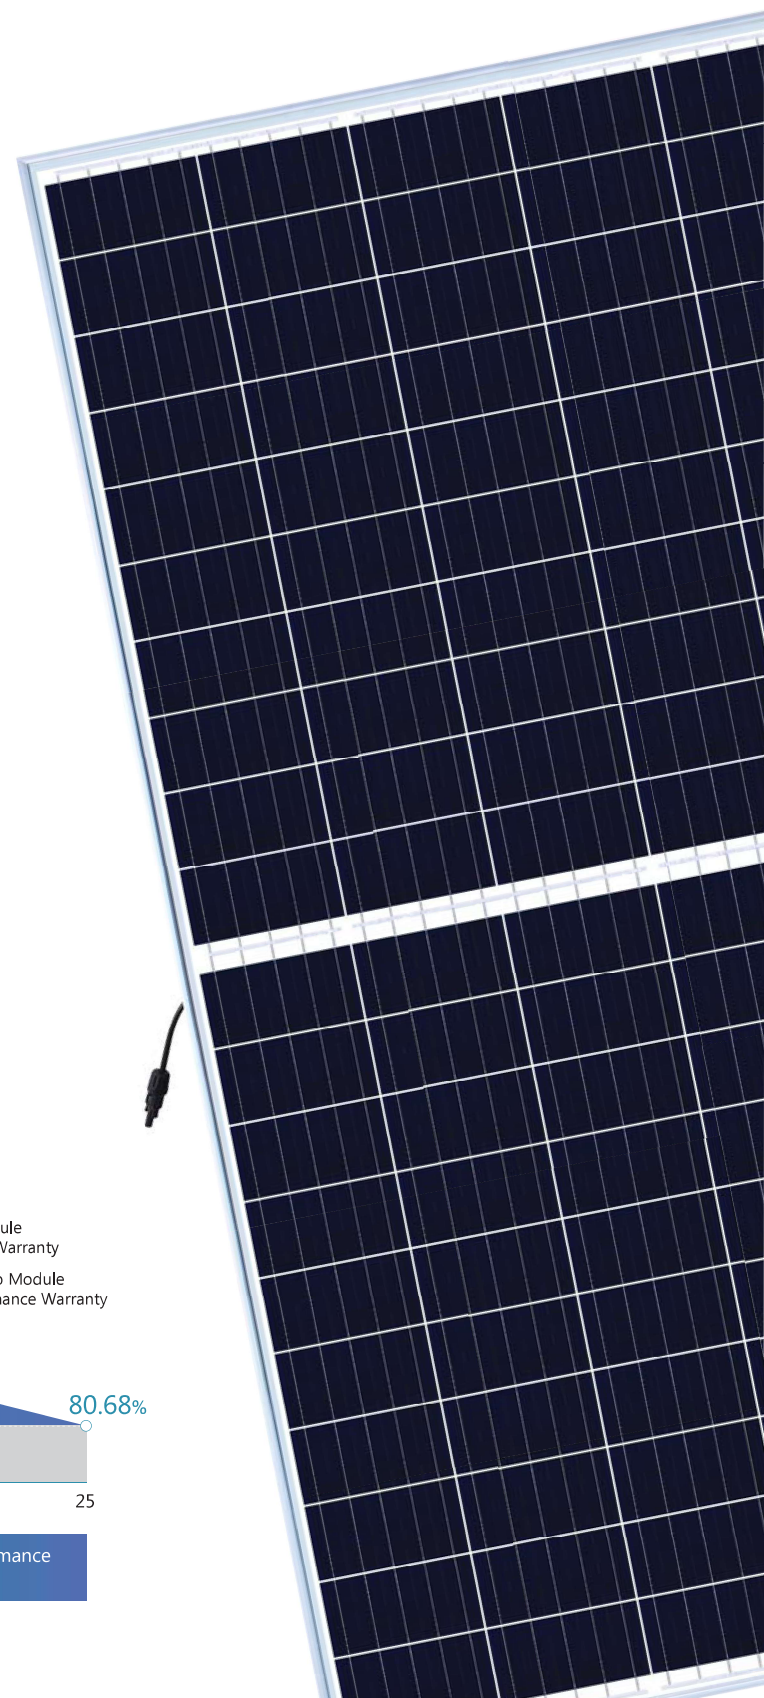

## LINEAR PERFORMANCE WARRANTY

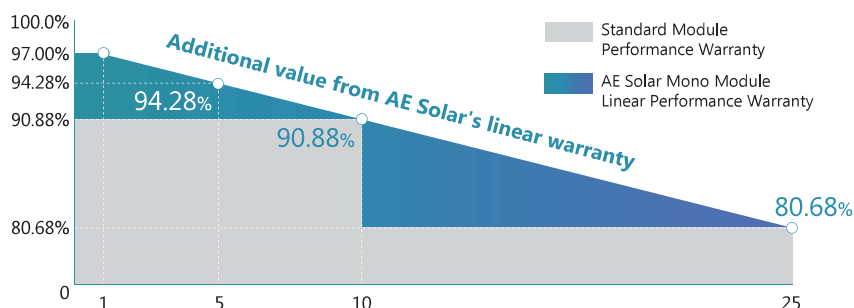

**12years** Product Material & Workmanship

**25years** Linear Performance Warranty

**PERC Technology**

**AE SOLAR High Efficiency Monocrystalline Half-cut Cell Solar Module with Perc Technonoly**

<b>ELECTRICAL DATA @ STC*</b>		AE320HM6L-60	AE325HM6L-60	AE330HM6L-60	AE335HM6L-60	AE340HM6L-60
Peak Power (Pmax) (W)		320	325	330	335	340
Maximum Power Voltage (Vmp) (V)		34.08	34.36	34.63	34.90	35.17
Maximum Power Current (Imp) (A)		9.39	9.46	9.53	9.60	9.67
Open-circuit Voltage (Voc) (V)		41.00	41.26	41.53	41.78	42.01
Short-circuit Current (Isc) (A)		9.91	9.99	10.08	10.16	10.24
Module Efficiency (%)		18.98	19.28	19.57	19.87	20.17
Operating Temperature		-40°C~ +85°C				
Maximum System Voltage		1000V				
Maximum Series Fuse Rating		15A				
Application Class		Class A				
Power Tolerance		0~+3%				

\*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5

<b>ELECTRICAL DATA @ NMOT*</b>		AE320HM6L-60	AE325HM6L-60	AE330HM6L-60	AE335HM6L-60	AE340HM6L-60
Peak Power (Pmax) (W)		237	242	246	250	253
MPP Voltage (Vmp) (V)		31.38	31.99	32.24	32.49	32.74
MPP Current (Imp) (A)		7.56	7.58	7.63	7.69	7.74
Open Circuit Voltage (Voc) (V)		38.67	39.09	39.34	39.58	39.80
Short Circuit Current (Isc) (A)		8.00	8.06	8.13	8.20	8.26

\*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

<b>TEMPERATURE CHARACTERISTICS</b>		
Temperature coefficient of Pmax		-0.38%/°C
Temperature coefficient of Voc		-0.31%/°C
Temperature coefficient of Isc		0.05%/°C
NMOT		41±3°C

<b>MECHANICAL DATA</b>		
Cell Type		Mono-Crystalline, 158.75×79.38mm
Cell Arrangement		120pcs (2×(6×10))
Dimension (L×W×H)		1686×1000×35mm
Weight		19.5kg
Front Cover		3.2mm Tempered Glass
Frame		Anodized Aluminium Alloy
Junction Box		IP68, 3 Bypass Diodes
Cable Type		4mm²
Length of Cable		1160mm
Connector		Jiaming:PV-JM601


<b>PACKING MANNER</b>		
Packing Type		40HQ
Piece/Pallet		30
Pallet/Container		26
Piece/Container		780

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, AE ALTERNATIVE ENERGY GmbH Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.




\*Power measurement tolerance: ±3%  
 \*Voc measurement tolerance: ±3%  
 \*Isc measurement tolerance: ±3%

\*Modules Shipped to AU are made in China

**Current-Voltage Curve under different irradiance**

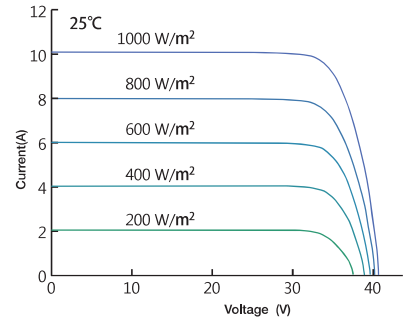

**Current-Voltage Curve under different working temperatures**

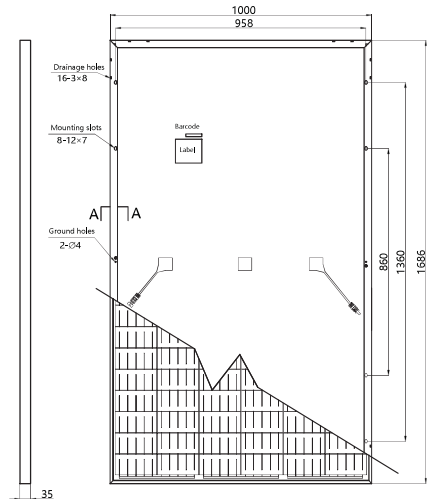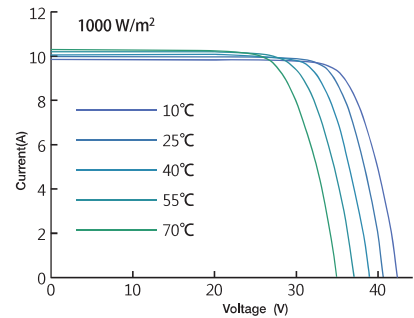

Section A-A Dimension (unit: mm)

Version 2019.08 © AE SOLAR All Rights Reserved.