

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Qingdao Yinghua Solar Co., Ltd.


AS-6M30 280-310

AS-6M30-280W

Also available on the web at
EnergyPal.com/qingdao-yinghua-solar-co-ltd-solar-panels/as-6m30-280w

AS-6M30 PERC

MONOCRYSTALLINE MODULE

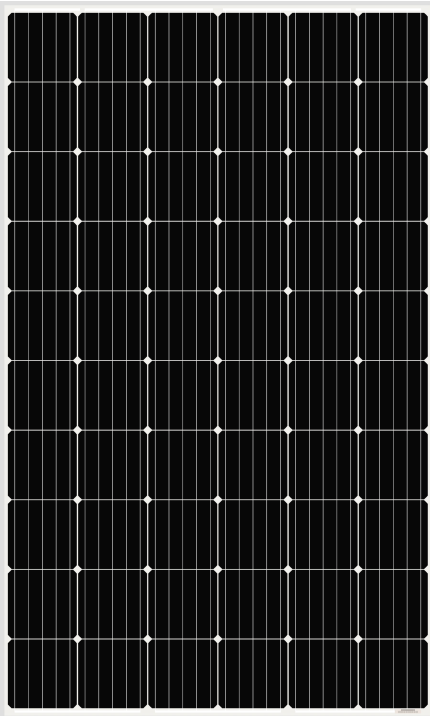

Passionately

committed to

delivering innovative

energy solution

ADVANCED PERFORMANCE & PROVEN ADVANTAGES


- High module conversion efficiency up to 19.05% by using Passivated Emmitter Rear Contact (PERC) technology.
- Low degradation and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.
- Positive power tolerance of 0 ~ +3 %.

CERTIFICATIONS

- IEC61215, IEC61730, IEC62716, IEC61701, CE, CQC, CGC, ETL(USA), JET(Japan), J-PEC(Japan), Kemco(South Korea), KS(South Korea), MCS(UK), CEC(Australia), FSEC(FL-USA), CSI Eligible(CA-USA), Israel Electric(Israel), InMetro(Brazil), TSE(Turkey)
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

SPECIAL WARRANTY

- 12 years limited product warranty.
- Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

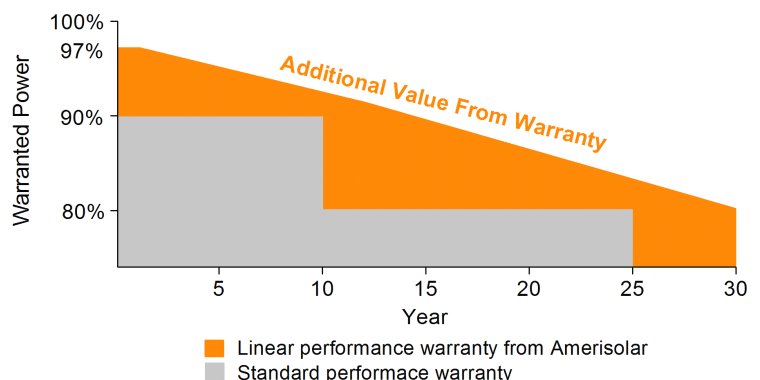

ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P_{max})	280W	285W	290W	295W	300W	305W	310W
Open Circuit Voltage (V_{OC})	38.8V	39.0V	39.2V	39.4V	39.6V	39.8V	40.0V
Short Circuit Current (I_{SC})	9.37A	9.45A	9.53A	9.62A	9.70A	9.79A	9.88A
Voltage at Nominal Power (V_{mp})	31.6V	31.8V	32.0V	32.2V	32.4V	32.6V	32.8V
Current at Nominal Power (I_{mp})	8.87A	8.97A	9.07A	9.17A	9.26A	9.36A	9.46A
Module Efficiency (%)	17.21	17.52	17.83	18.13	18.44	18.75	19.05
Operating Temperature	-40°C to +85°C						
Maximum System Voltage	1000V DC						
Fire Resistance Rating	Type 1(in accordance with UL1703)/Class C(IEC61730)						
Maximum Series Fuse Rating	15A						

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P_{max})	207W	211W	215W	218W	222W	226W	230W
Open Circuit Voltage (V_{OC})	35.7V	35.9V	36.1V	36.3V	36.5V	36.7V	36.9V
Short Circuit Current (I_{SC})	7.59A	7.65A	7.72A	7.79A	7.86A	7.93A	8.00A
Voltage at Nominal Power (V_{mp})	28.8V	29.0V	29.2V	29.4V	29.6V	29.8V	30.0V
Current at Nominal Power (I_{mp})	7.19A	7.28A	7.37A	7.42A	7.50A	7.59A	7.67A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline PERC 156.75x156.75mm (6x6inches)
Number of cells	60 (6x10)
Module dimensions	1640x992x35mm (64.57x39.06x1.38inches)
Weight	18kg (39.7lbs)
Front cover	3.2mm (0.13inches) tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), 900mm (35.43inches)
Connector	MC4 or MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P_{max}	-0.39%/°C
Temperature Coefficients of V_{OC}	-0.29%/°C
Temperature Coefficients of I_{SC}	0.052%/°C


PACKAGING

Standard packaging	30pcs/pallet
Module quantity per 20' container	360pcs
Module quantity per 40' container	840pcs(GP)/924pcs(HQ)


ENGINEERING DRAWINGS

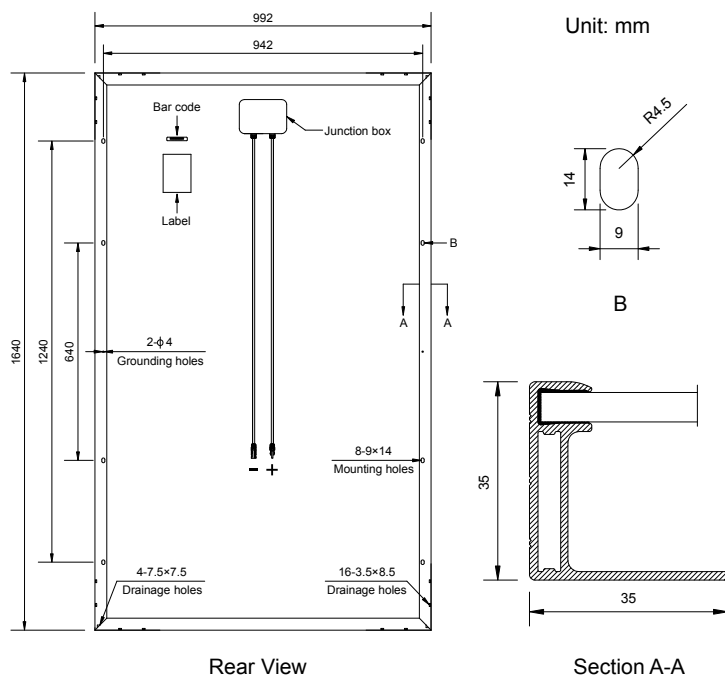

IV CURVES

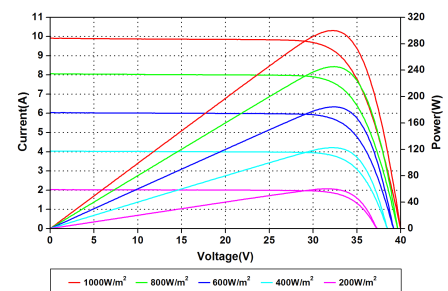

Current-Voltage and Power-Voltage Curves at Different Irradiances

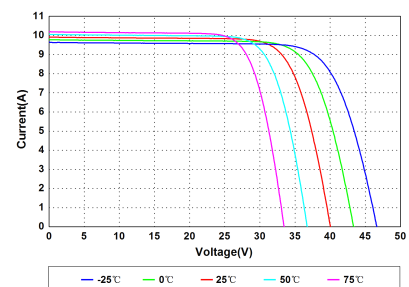

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.