

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Zhejiang Aurora PV Solar Co., Ltd.

AU-72P 245-295

AU-72P-255

Also available on the web at
EnergyPal.com/zhejiang-aurora-pv-solar-co-ltd-solar-panels/au-72p-255

Aurora PV

Key Features

72 Poly-Crystalline solar cells

Unique frame design to reinforce sealing and to prevent freezing and warping


Strong aluminum frames to strengthen the load hold and to stand against high wind

Special mounting holes on the frames for long and short side mounting

High transparency low iron tempered glass with enhanced stiffness and impact resistance

Advanced EVA encapsulation system with multilayer backsheets to better product modules

25-year transferrable power output warranty: 5 years/95%, 12 years/90%, 25 years/80%



Composition

1	Tempered Glass
2	EVA
3	Solar Cell
4	EVA
5	Triple-layer back sheet

Electrical Characteristics

Model	Voc(V)	Vpm(V)	Pmax(W)	Isc(A)	Ipm(A)	FF
AU-72P-245	43.51	35.19	245	7.71	6.99	73.33
AU-72P-250	43.59	35.27	250	7.79	7.08	73.54
AU-72P-255	43.71	35.56	255	7.87	7.15	73.91
AU-72P-260	43.8	35.75	260	7.99	7.26	74.16
AU-72P-265	43.91	35.88	265	8.13	7.39	74.28
AU-72P-270	44.01	35.98	270	8.19	7.47	74.57
AU-72P-275	44.21	36.53	275	8.24	7.53	75.51
AU-72P-280	44.42	36.74	280	8.31	7.63	75.94
AU-72P-285	44.58	37.02	285	8.37	7.71	76.49
AU-72P-290	44.8	37.46	290	8.41	7.75	77.05
AU-72P-295	44.98	37.83	295	8.46	7.85	78.04

Max-System Voltage (VDC) 600V(UL)/1000V(IEC)

Max.Series Fuse (A) 15

Pm Temperature Coefficients (%/°C) $-(0.5 \pm 0.05)$

Isc Temperature Coefficients (%/°C) 0.06 ± 0.01

Voc Temperature Coefficients (%/°C) $-(0.35 \pm 0.05)$

NOCT Nominal Operating Cell Temperature $46 \pm 2^\circ\text{C}$

All specified Parameters are at STC 25°C Ambient, $1000\text{W}/\text{m}^2$ irradiance and AM 1.5

Mechanical Characteristics

Solar Cell	Polycrystalline $156 \times 156 \text{ mm}$
No. of Cells	72 (6×12)
Dimensions	$1956 \times 992 \times 50 \text{ mm}$
Weight	27kg
Front Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP65
Max.wind load/max.snow load	2400pa/5400pa

Package Information

Carton	2pcs/ctn
Pallet	22pcs/plt
20"GP	6plts (220pcs)
40"GP	12plts (528pcs)

Zhejiang Aurora PV Solar Co., Ltd

Add: Pingshui Industry Zone, Shaoxing, Zhejiang, China


Tel: 0086-575-85730081

Fax: 0086-575-88056944

Email: sales@aurorapv.com

Msn: sandyzyq@hotmail.com

Website: <http://www.aurorapv.com>

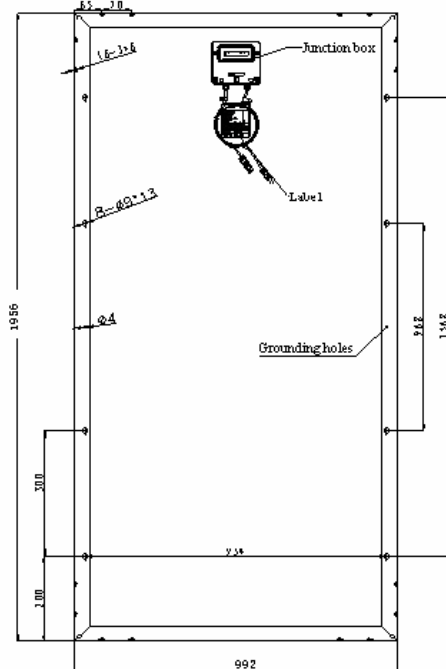

Absolute Ratings

Dielectric Insulation Voltage 3000V


Operating Temperature ($^\circ\text{C}$) $-40 \sim +85$

Storage Temperature ($^\circ\text{C}$) $-40 \sim +85$

Brand Authentication



Current-Voltage&Power-Voltage Curve(220W)

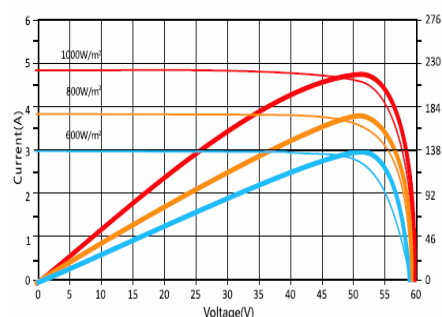

Temperature Dependence of Isc, Voc, Pmax

