

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Jiangsu Aoxuan Photoelectric Technology Co., Ltd.**

**AX-6P-200/210/220W**



**AX-6P-200W**

Also available on the web at

[EnergyPal.com/jiangsu-aoxuan-photoelectric-technology-co-ltd-solar-panels/ax-6p-200w](http://EnergyPal.com/jiangsu-aoxuan-photoelectric-technology-co-ltd-solar-panels/ax-6p-200w)

# AX-6P200 AX-6P210 AX-6P220

## POLYCRYSTALLINE SILICON MODULE

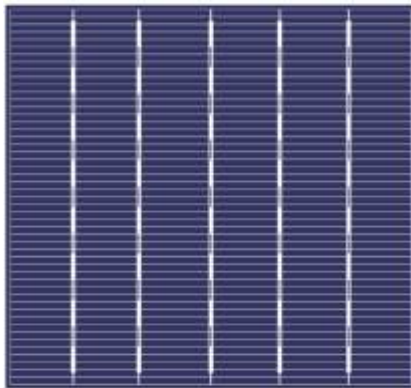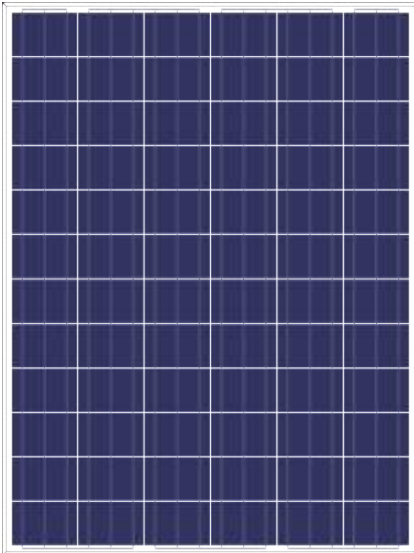

Add: No.215 Jincheng Road, Jincheng Town, Jintan District, Changzhou City, Jiangsu, China.  
 Tel: +86-519-82550600  
 Fax: +86-519-82550600  
 E-mail: sales@aoxuanpv.com  
 Web: www.aoxuanpv.com

### Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w

### Warranty


- 5 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

### Comprehensive Certificates


- ISO 9001:2008: Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUV Certificate



▼ Engineering Drawings (Front Side)

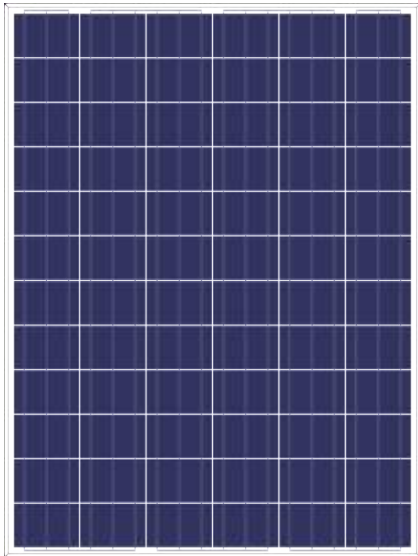

▼ Engineering Drawings (Back Side)

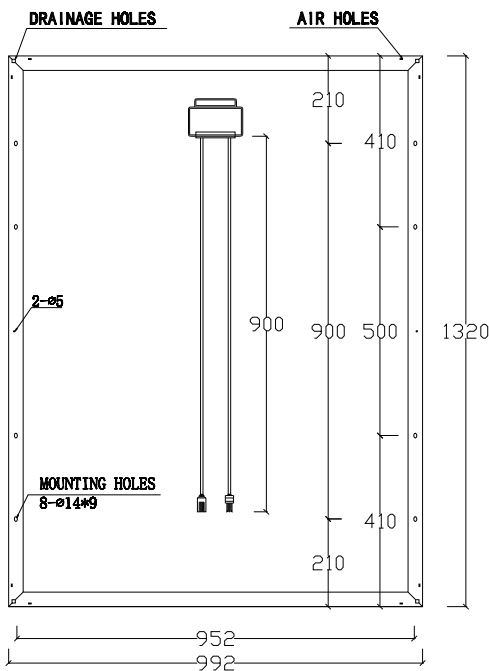

Add: No.215 Jincheng Road, Jincheng Town, Jintan District, Changzhou City, Jiangsu, China.  
 Tel: +86-519-82550600  
 Fax: +86-519-82550600  
 E-mail: sales@aoxuanpv.com  
 Web: www.aoxuanpv.com

## Raw materials and Mechanical Parameters

	AX-6P200	AX-6P210	AX-6P220
Type of Cells(mm)	poly156.75 × 104		
NO. of Cells and Connections	6 × 12=72		
Dimensions(mm)(L*W*H)	1320 × 992 × 35		
Weight(kg)	15.3		
Glass	3.2mm Tempered Glass		
Encapsulation	EVA		
Backsheet	Multilayer Composite		
Aluminium-Frame	Silvery/Black Anodized aluminium alloy		
Junction-Box	IP65/IP67		
Cable	4mm <sup>2</sup> , 900mm		
Connector	MC4 and MC4 Compatible		
Package Configuration	25pcs/pallet		

## Performance Parameters

	AX-6P200	AX-6P210	AX-6P220
Maximum System Voltage	1000V		
Operating Temperature	-45~+80℃		
Maximum Series Fuse	10A		
Maximum Static Load, Front Side (e.x. Snow, Wind)	5400PA		
Maximum Static Load, Back Side (e.x. Wind)	2400PA		
Application Grade	Class A		

## Electrical Parameters (Standard Test Condition)

	AX-6P200	AX-6P210	AX-6P220
Rated Maximum Power(Mp)	200W	210W	220W
Power Tolerance	0~+5W		
Cell Efficiency	17.40%	18.20%	18.80%
Open Circuit Voltage(Voc)	44.4V	44.6V	44.8V
Maximum Power Voltage(Vmp)	35.2V	35.5V	35.8V
Short Circuit Current(Isc)	6.02A	6.40A	6.58A
Maximum Power Current(Imp)	5.69A	6.04A	6.15A
Temperature Coefficient of Isc	+0.06%		
Temperature Coefficient of Voc	-0.33%		
Temperature Coefficient of Pmp	-0.45%		
Standard Test Condition	Irradiance: 1000W/M <sup>2</sup> , Cell Temperature: 25℃, Spectrum AM: 1.5		

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.