

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Zhejiang Powerwell Solar Energy Co., Ltd.

BW-SM250-265P60

BW-SM260P

Also available on the web at

EnergyPal.com/zhejiang-powerwell-solar-energy-co-ltd-solar-panels/bw-sm260p




BW-SM250-265P60

Polycrystalline Solar Module


KEY FEATURES

- Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)
- Perfect module self-cleaning capability, reduce power loss caused by dust (soiling effect)
- More elegant cell and module appearance
- Excellent performance in low-light irradiance environment
- High salt mist and ammonia resistance

Premium Performance Warranty

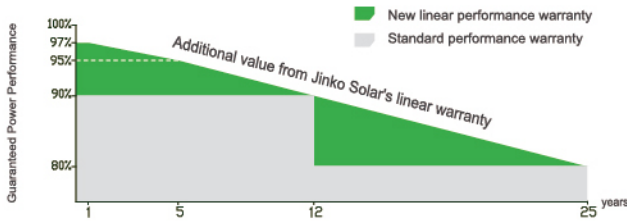

* Based on customer requirements and contract terms

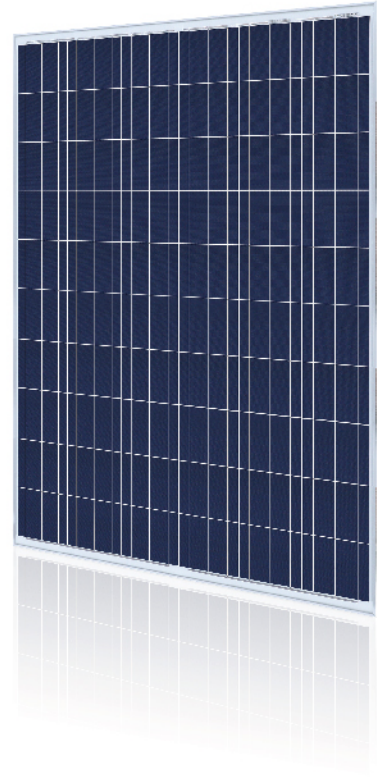


ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007




IEC 61215:2005
EN 61730-1:2007
EN 61730-2:2007



Dimensions

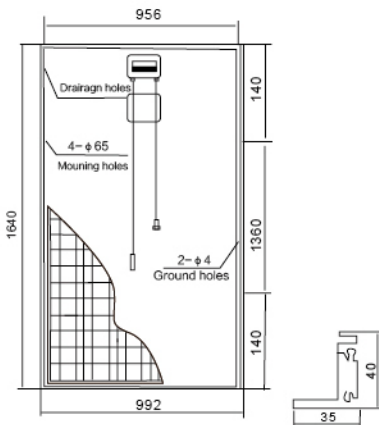

I-V Curves

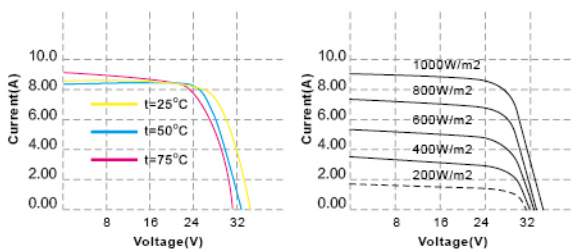

General Data

Cell	Polycrystalline 156mmx156mm		
No. of cells	60 in series (6x10)		
Weight	18.8kg		
Dimensions	1640x992x40 (mm)		
Produced in accordance with	TUV/IEC 61215/EN 61730		

Electrical Data

(STC: Irradiance 1000w/m², module temperature 25°C, AM=1.5)

Power	250Wp	255Wp	260Wp	265Wp
Open circuit voltage	36V	36V	36V	36V
Maximum power voltage	30V	30V	30V	30V
Short circuit current	9.16A	9.35A	9.53A	9.71A
Maximum power current	8.33A	8.5A	8.66A	8.83A
Module Conversion Efficiency	15.36%	15.67%	15.99%	16.29%
Maximum system voltage	1000V			
Operating temperature	-40°C to +90°C			
NOCT	45°C ± 2°C			
Temperature coefficient of Isc	+0.05%/°C			
Temperature coefficient of Voc	-0.34%/°C			
Temperature coefficient of Pm	-0.5%/°C			

Specifications included in this datasheet are subject to change without prior notice.