

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**Cetesolar Co., Ltd.
Cetesolar 60 270-295W Mono
CS270M-60DG**

Also available on the web at
EnergyPal.com/cetesolar-co-ltd-solar-panels/cs270m-60dg

DUAL-GLASS MODULE



Cetesolar 60 270-295 Watt MONOCRYSTALLINE MODULE

Positive power tolerance of 0~+3%

ISO9001:2008, ISO14001:2004, OHSAS18001
certified factory.
IEC61215, IEC61730 certified products.

(4BB)



KEY FEATURES



PID FREE:

The possibility of PID effect generation is greatly reduced by unique frameless design.



Higher Lifetime Power Yield:

0.5% annual power degradation
30 year linear power warranty



Saving BOS Cost:

Designed for high voltage systems of up to 1500 VDC, saving BOS cost



Improved Durability and Reliability:

Dual glass reduces micro-cracking, snail trails, corruptions caused by moisture, sand, salt mist, acid, alkali, etc. The optional Solar Super Shell Tape designed for dual glass module edge sealing helps prevent water vapor from entering the module and improve the reliability significantly.



Less Maintenance Requirement:

Reduced soiling and snow coverage requires less maintenance and enhances fire safety



Aesthetically Pleasing Design:

White encapsulation material maximizes module efficiency up to 17.94% (60-mono max. output 295W); Transparent EVA increases light transmission, ideal for installations requiring light to pass through




Strengthened Mechanical Support:


5400 Pa snow load, 2400 Pa wind load

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 30 Year Linear Power Warranty
0.5% Annual Degradation Over 30 years

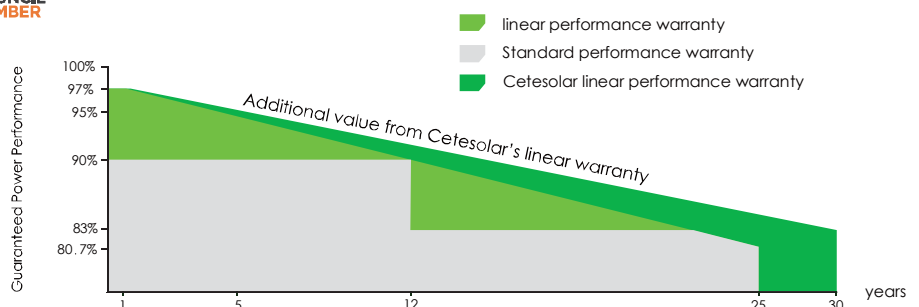

Engineering Drawings

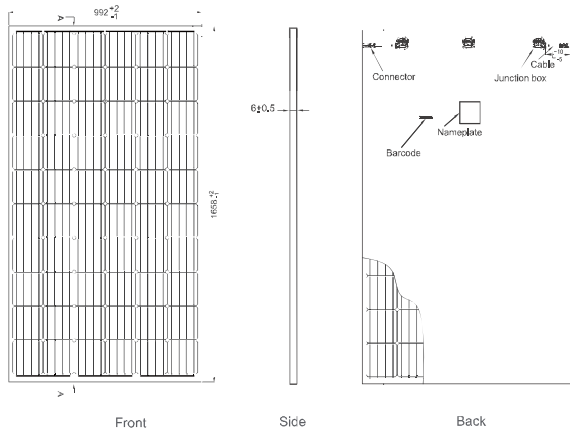

T



*If using shell tape, length and width will add 2mm respectively, thickness will add to 6mm.


Packaging Configuration

(Two boxes=One pallet)


33pcs/box, 66pcs/pallet, 858pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

Current-Voltage & Power-Voltage Curves (290W)

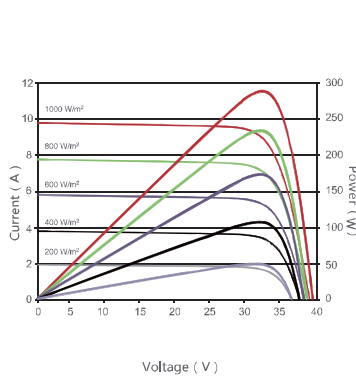

Temperature Dependence of Isc, Voc, Pmax

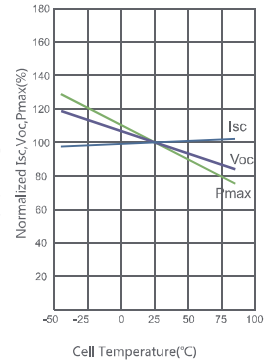

Mechanical Characteristics

Cell Type	Mono-crystalline PERC	156×156mm (6 inch)
No. of cells	60 (6×10)	
Dimensions	1658x992x6mm(65.27x39.05x0.24 inch, 2.5mm Glass)	
Weight	24kg(53 lbs, 2.5mm Glass)	
Front Glass	2.5mm High transmission, Antireflection coating, semi-tempered glass	
Back Glass	2.5mm Semi-tempered glass	
Junction Box	IP67 Rated	
Output Cables	TUV 1×4.0mm positive – 250mm, negative- 150mm or customized	

SPECIFICATIONS

Module Type	CS270M-60DG		CS275M-60DG		CS280M-60DG		CS285M-60DG		CS290M-60DG		CS295M-60DG	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	270Wp	201Wp	275Wp	205Wp	280Wp	209Wp	285Wp	212Wp	290Wp	216Wp	295Wp	220Wp
Maximum Power Voltage (Vmp)	31.4V	29.3V	31.6V	29.6V	31.8V	29.7V	32V	29.9V	32.2V	30.2V	32.4V	30.4V
Maximum Power Current (Imp)	8.60A	6.85A	8.70A	6.93A	8.81A	7.01A	8.9A	7.12A	9.02A	7.15A	9.1A	7.24A
Open-circuit Voltage (Voc)	38.4V	35.6V	38.5V	36.0V	38.6V	36.2V	38.7V	36.4V	39.5V	36.6V	39.7V	36.8V
Short-circuit Current (Isc)	9.28A	7.45A	9.40A	7.54A	9.49A	7.62A	9.51A	7.72A	9.55A	7.81A	9.61A	7.89A
Module Efficiency STC (%)	16.42%		16.72%		17.02%		17.33%		17.63%		17.94%	
Operating Temperature(°C)	-40°C~+85°C											
Maximum system voltage	1000(or 1500)VDC (IEC)											
Maximum series fuse rating	15A											
Power tolerance	0~+3%											
Temperature coefficients of Pmax	-0.39%/°C											
Temperature coefficients of Voc	-0.29%/°C											
Temperature coefficients of Isc	0.05%/°C											
Nominal operating cell temperature (NOCT)	45±2°C											

* STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%

Cetesolar Co.,Ltd. | [Mail:sales@cetesolar.com](mailto:sales@cetesolar.com)
Office:+86-731-87012835

Skype:cetesolar
Mobile/What'sApp:+86-18807419000