

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**Canadian Solar Inc.
BiKu CS3K-310-335MB-AG
CS3K-325MB-AG**

Also available on the web at
EnergyPal.com/canadian-solar-inc-solar-panels/cs3k-325mb-ag



BiKu MODULE

NEW GENERATION BIFACIAL MODULE

FRONT POWER RANGE: 310W ~ 335W

UP TO 30% MORE POWER FROM THE BACK SIDE

CS3K-310 | 315 | 320 | 325 | 330 | 335MB-AG



FRONT

BACK



5BB cell



MBB cell

* Both 5BB and MBB modules will be supplied.

MORE POWER



Up to 30% more power from the back side



Low NMOT: 41 ± 3 °C
Low temperature coefficient (Pmax):
-0.36 % / °C



Better shading tolerance

MORE RELIABLE



Lower internal current,
lower hot spot temperature



Minimizes micro-cracks and
snail trails



Heavy snow load up to 5400 Pa,
wind load up to 2400 Pa *



Fire Class A and Type 3 / Type 13



linear power output warranty*



enhanced product warranty on materials
and workmanship*

*According to the applicable Canadian Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730: VDE / CE / MCS

IEC 61701 ED2: VDE / IEC 62716: VDE / IEC 60068-2-68: SGS

UL 1703: CSA

Take-e-way



* As there are different certification requirements in different markets, please contact your local Canadian Solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

CANADIAN SOLAR INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey. As a leading PV project developer and manufacturer of solar modules with over 36 GW deployed around the world since 2001.


* For detailed information, please refer to Installation Manual.

CANADIAN SOLAR INC.


545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, www.canadiansolar.com, support@canadiansolar.com

ENGINEERING DRAWING (mm)


Rear View

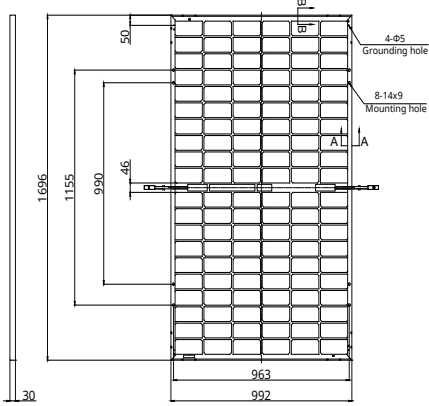


Frame Cross Section



Mounting Hole



CS3K-320MB-AG / I-V CURVES

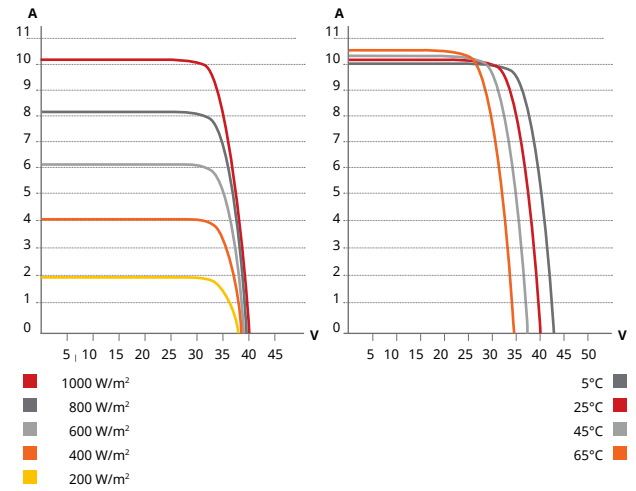

ELECTRICAL DATA | STC*

	Nominal Max. Power (Pmax)	Opt. Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)	Module Efficiency	
CS3K-310MB-AG	310 W	32.9 V	9.43 A	39.7 V	9.98 A	18.43%	
Bifacial Gain**	5%	326 W	32.9 V	9.90 A	39.7 V	10.48 A	19.38%
	10%	341 W	32.9 V	10.37 A	39.7 V	10.98 A	20.27%
	20%	372 W	32.9 V	11.32 A	39.7 V	11.98 A	22.11%
	30%	403 W	32.9 V	12.26 A	39.7 V	12.97 A	23.95%
CS3K-315MB-AG	315 W	33.1 V	9.52 A	39.9 V	10.06 A	18.72%	
Bifacial Gain**	5%	331 W	33.1 V	10.00 A	39.9 V	10.56 A	19.67%
	10%	347 W	33.1 V	10.47 A	39.9 V	11.07 A	20.62%
	20%	378 W	33.1 V	11.42 A	39.9 V	12.07 A	22.47%
	30%	410 W	33.1 V	12.38 A	39.9 V	13.08 A	24.37%
CS3K-320MB-AG	320 W	33.3 V	9.61 A	40.1 V	10.14 A	19.02%	
Bifacial Gain**	5%	336 W	33.3 V	10.09 A	40.1 V	10.65 A	19.97%
	10%	352 W	33.3 V	10.57 A	40.1 V	11.15 A	20.92%
	20%	384 W	33.3 V	11.53 A	40.1 V	12.17 A	22.82%
	30%	416 W	33.3 V	12.49 A	40.1 V	13.18 A	24.73%
CS3K-325MB-AG	325 W	33.5 V	9.71 A	40.3 V	10.22 A	19.32%	
Bifacial Gain**	5%	341 W	33.5 V	10.20 A	40.3 V	10.73 A	20.27%
	10%	358 W	33.5 V	10.68 A	40.3 V	11.24 A	21.28%
	20%	390 W	33.5 V	11.65 A	40.3 V	12.26 A	23.18%
	30%	423 W	33.5 V	12.62 A	40.3 V	13.29 A	25.14%
CS3K-330MB-AG	330 W	33.7 V	9.80 A	40.5 V	10.30 A	19.61%	
Bifacial Gain**	5%	347 W	33.7 V	10.29 A	40.5 V	10.82 A	20.62%
	10%	363 W	33.7 V	10.78 A	40.5 V	11.33 A	21.58%
	20%	396 W	33.7 V	11.76 A	40.5 V	12.36 A	23.54%
	30%	429 W	33.7 V	12.74 A	40.5 V	13.39 A	25.50%
CS3K-335MB-AG	335 W	33.9 V	9.89 A	41.2 V	10.39 A	19.91%	
Bifacial Gain**	5%	352 W	33.9 V	10.38 A	41.2 V	10.91 A	20.92%
	10%	369 W	33.9 V	10.88 A	41.2 V	11.43 A	21.93%
	20%	402 W	33.9 V	11.87 A	41.2 V	12.47 A	23.89%
	30%	436 W	33.9 V	12.86 A	41.2 V	13.51 A	25.91%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.
 ** Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA

Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1500 V (IEC) or 1000 V (IEC/UL)
Module Fire Performance	TYPE 3 / Type 13 (UL 1703) or CLASS A (IEC61730)
Max. Series Fuse Rating	25 A
Application Classification	Class A
Power Tolerance	0 ~ + 5 W
Power Bifaciality*	70 %

* Power Bifaciality = Pmax_{rear} / Pmax_{front}, both Pmax_{rear} and Pmax_{front} are tested under STC, Bifaciality Tolerance: ± 5 %

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

ELECTRICAL DATA | NMOT*

	Nominal Max. Power (Pmax)	Opt. Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)
CS3K-310MB-AG	232 W	30.7 V	7.54 A	37.3 V	8.05 A
CS3K-315MB-AG	235 W	30.9 V	7.61 A	37.5 V	8.11 A
CS3K-320MB-AG	239 W	31.1 V	7.69 A	37.7 V	8.18 A
CS3K-325MB-AG	243 W	31.3 V	7.76 A	37.9 V	8.24 A
CS3K-330MB-AG	247 W	31.5 V	7.84 A	38.1 V	8.31 A
CS3K-335MB-AG	250 W	31.7 V	7.91 A	38.7 V	8.38 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline
Cell Arrangement	120 [2x (10 x 6)]
Dimensions	1696 x 992 x 30 mm (66.8 x 39.1 x 1.18 in)
Weight	22.1 kg (48.7 lbs)
Front / Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 diodes
Cable	4.0 mm ² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	Portrait: 400 mm (15.7 in) (+) / 280 mm (11.0 in) (-), landscape: 1250 mm (49.2 in)*
Connector	T4 series or H4 UTX or MC4-EVO2
Per Pallet	35 pieces
Per Container (40' HQ)	910 pieces

* For detailed information, please contact your local Canadian Solar sales and technical representatives.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.36 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	41 ± 3°C

PARTNER SECTION



CANADIAN SOLAR INC.

545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, www.canadiansolar.com, support@canadiansolar.com