

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Camel Solar Energy (Dalian) Co., Ltd.

CSE-P5C2-60-BB1

CSE-P5C2-60-BB1-290

Also available on the web at


EnergyPal.com/camel-solar-energy-dalian-co-ltd-solar-panels/cse-p5c2-60-bb1-290

骆驼绿色电力科技(大连)有限公司

CSE-P5C2-60-BB1

MECHANICAL PARAMETERS

Cell(mm)	156.75x78.375
Weight(kg)	18.5
Dimensions(LxWxH)(mm)	1662x991x35
Cable Length(mm)	75+275
Cable cross section size (mm ²)	4
Qty of cells	120(10x12)
Qty of diodes	3
Packing configuration	30 pcs / Pallet

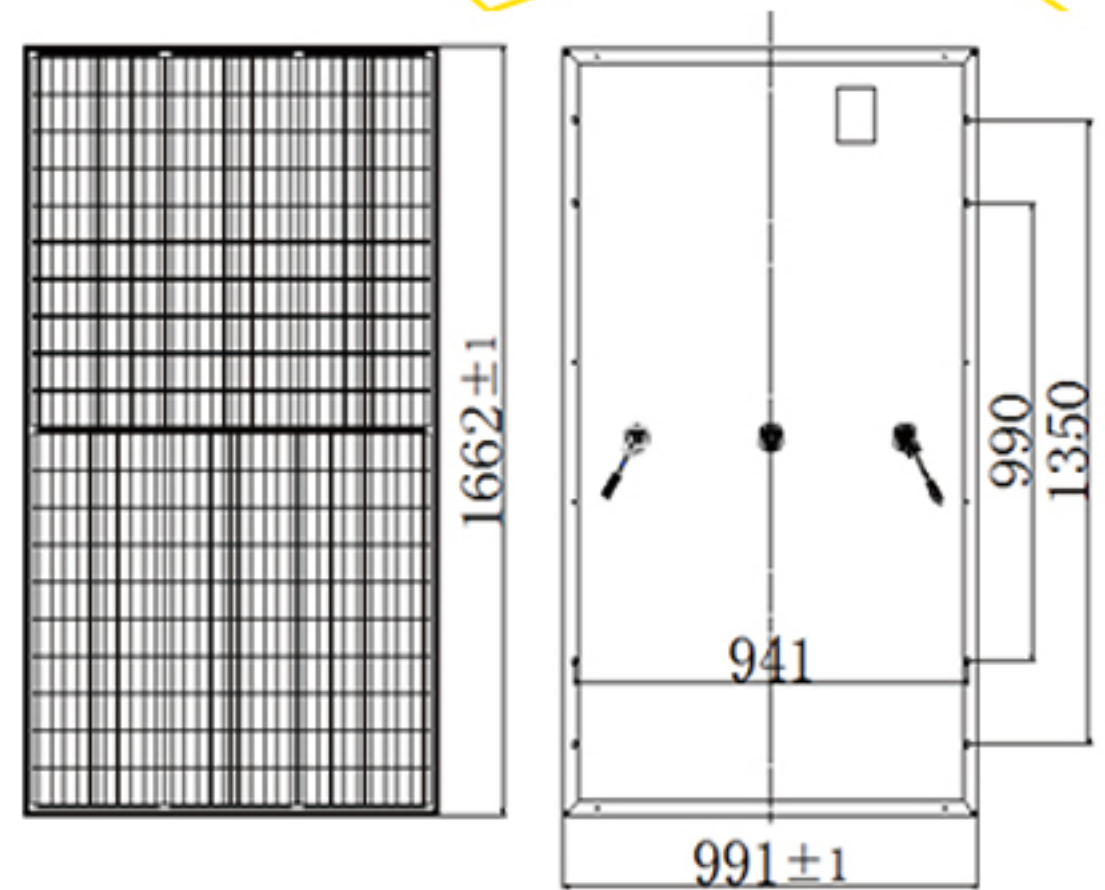


TYPE	CSE-P5C2-60BB1-270	CSE-P5C2-60-BB1-275	CSE-P5C2-60-BB1-280	CSE-P5C2-60-BB1-285	CSE-P5C2-72-BB1-290
Rated Maximum Power at STC	270	275	280	285	290
Open Circuit Voltage (Voc/V)	37.95	38.15	38.20	38.40	38.55
Working Power Voltage (Vmp/V)	30.70	31.10	31.55	31.90	32.33
Short Circuit Current (Isc/A)	9.35	9.39	9.44	9.49	9.53
Working Power Current (Imp/A)	8.80	8.85	8.89	8.96	9.00
Module Efficiency [%]	16.39	16.70	17.00	17.30	17.61
Power Tolerance (W)				0~+5	
αIsc (%K)				+0.073	
βVoc (%K)				-0.34	
γPmp (%K)				-0.43	
STC:(Air Mass 1.5,Irradian 1000/m ² , Module Temperature 25℃)					

WORKING CONDITIONS

Maximum System Voltage	1000VDC(IEC)/600VDC(UL)
Operating Temp	-40℃~+85℃
Maximum Series Fuse	15A
Max.Wind Load	1600Pa
Max.Snow Load	3600Pa
NOCT	41.5±2℃
Application Class	Class A
Grounding conductivity	<0.1Ω


I-V CURVE

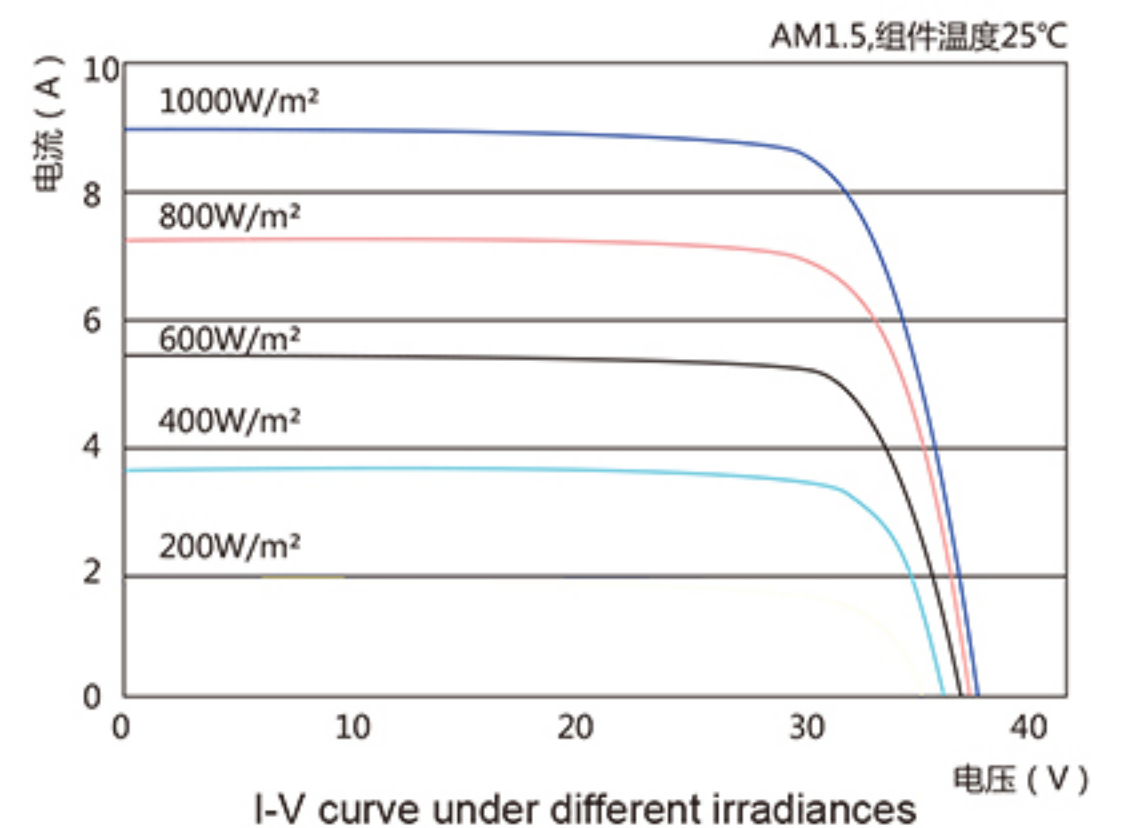

GUARANTEE

10-year limited product quality warranty;

Limited performance warranty: 10 years at 90% of the minimal rated power output, 25 years at 80% of the minimal rated power output.

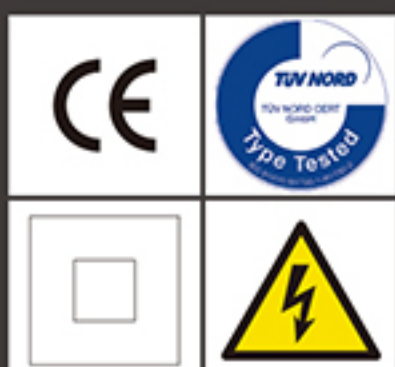

CAMEL SOLAR ENERGY (DALIAN) CO., LTD (CSE)

Add: Room 506-7, No.1, Gaoxin Street, High Technology Industrial Park, Dalian City, Liaoning Province, 110023, P.R.China

TEL: 400-8060-260

Http://www.camelsolarenergy.com

If any technology or parameter changes in the product specification, Camel Solar Energy (Dalian) Co., Ltd reserves the right of final interpretation.