

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet


Solarc Innovative Solarprodukte GmbH

CSM 36.10000_2A


CSM 36.10000_2A

Also available on the web at
EnergyPal.com/solarc-innovative-solarprodukte-gmbh-solar-panels/csm-36-10000_2a


Front

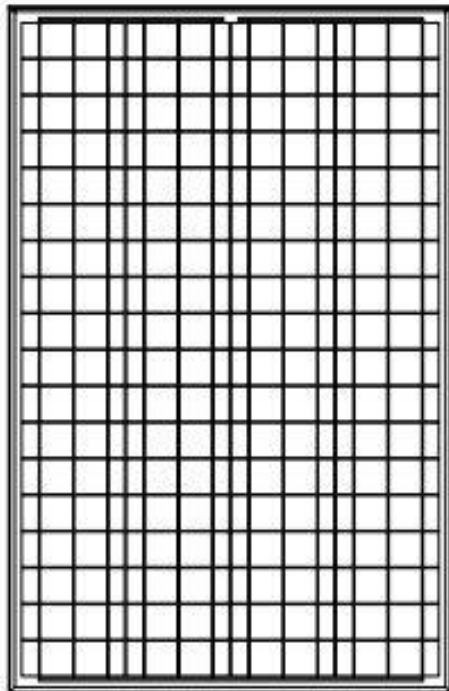

Rear

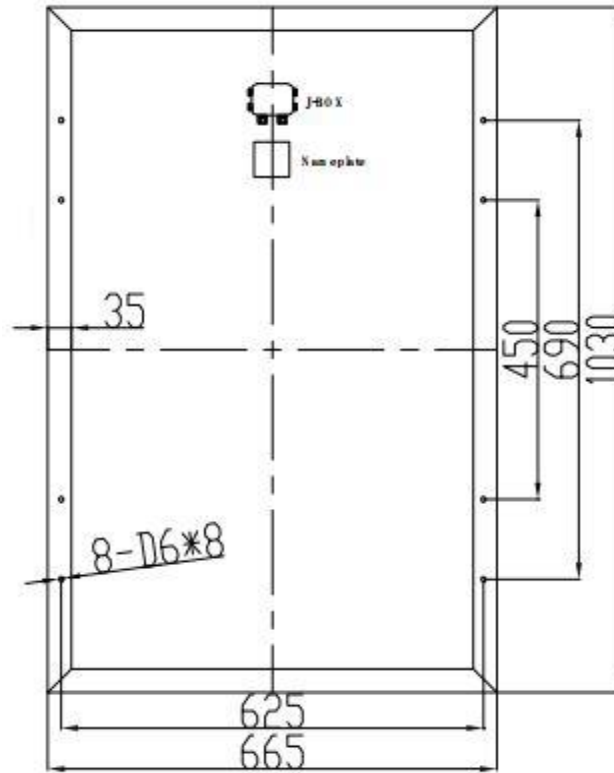

Section

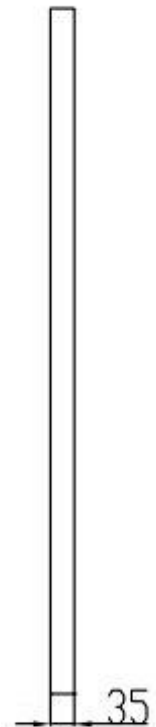

Dimensions:

1030 x 665 x 35 mm
Weight: 8.4 kg (NET)

Technical specification:

Laminate: Glass / EVA / TPE (tedlar / PET / tedlar) or TPT (white backsheet).
Front: High-transmission 3.2 mm tempered glass
Rear: TPT/TPE
Cells: 36 multi-Si solar cells
Frame: Clear anodized aluminium frame
Output: Junction box (optional with cable)

Electrical data (at STC*): $P_{mpp}: 100 W^*$ ($\pm 10\%$) / $V_{mpp}: 18 V^*$ / $I_{mpp}: 5.56 A^*$ / $V_{oc}: 22.3 V^*$ / $I_{sc}: 6.06 A^*$

*: Standard Test Conditions (1000W/m², 25°C, 1.5 AM).

SOLARC Innovative Solarprodukte GmbH Glogauer Straße 21, D-10999 Berlin Tel/Fax 030-3198554-00/99 info@solarc.de www.solarc.de	Product / Project CSM 36.10000 / Standard	Document Tech. Data Sheet	Issued 11.08.2011	Author AN
	Comments Data subject to change	Document no./ Ref. 2/ A	Modified 10.06.2014	Author AN