

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

United Renewable Energy Co., Ltd.

D6L_L3A / 60 cells

D6L305L3A



Also available on the web at
EnergyPal.com/united-renewable-energy-co-ltd-solar-panels/d6l305l3a









GLORY BIFI

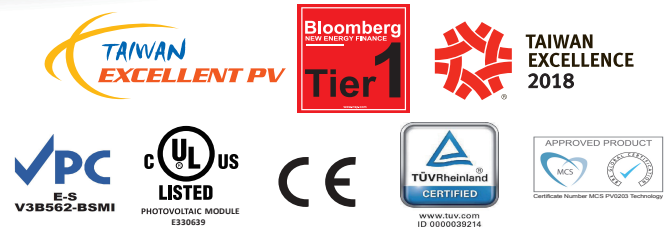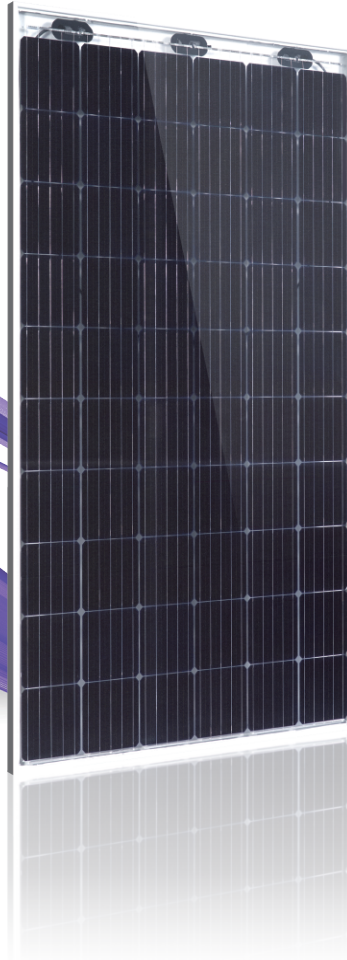
D6L_L3A / 60 cells
 295W - 310 W
 Mono-Crystalline PV Module

URE Glory BiFi module uses URE own p-PERC mono crystalline bifacial solar cells, and URE advanced double glass (G2G) module manufacturing technology.



Key Features

- | | | | |
|---|--|--|---|
|  | <p>Positive power tolerance
 +0 ~ +4.99 watt</p> |  | <p>100% EL inline inspection
 Better module reliability</p> |
|  | <p>Withstand heavy loading
 front load 8100 Pa & rear load 5400 Pa</p> |  | <p>Ammonia resistance
 According to IEC 62716 Ed. 1</p> |
|  | <p>30-Year
 Power output warranty</p> |  | <p>Design for 1500 VDC
 Reduce the system BOS effectively</p> |



URE

United Renewable Energy Co., Ltd.

Electrical Data

Model		Bifacial Gain			Bifacial Gain		
		D6L295L3A	5%	10%	D6L300L3A	5%	10%
Maximum Rating Power (Pmax)	[W]	295	310	325	300	315	330
Module Efficiency	[%]	17.6	18.5	19.4	17.9	18.8	19.7
Open Circuit Voltage (Voc)	[V]	39.47	39.47	39.47	39.61	39.61	39.61
Maximum Power Voltage	[V]	32.14	32.14	32.14	32.39	32.39	32.39
Short Circuit Current (Isc)	[A]	9.76	10.25	10.74	9.85	10.34	10.84
Maximum Power Current	[A]	9.18	9.64	10.10	9.27	9.73	10.20
Model		D6L305L3A	5%	10%	D6L310L3A	5%	10%
Maximum Rating Power (Pmax)	[W]	305	320	336	310	326	341
Module Efficiency	[%]	18.2	19.1	20.0	18.5	19.4	20.3
Open Circuit Voltage (Voc)	[V]	39.71	39.71	39.71	39.89	39.82	39.82
Maximum Power Voltage	[V]	32.50	32.50	32.50	32.68	32.68	32.68
Short Circuit Current (Isc)	[A]	9.91	10.41	10.90	9.95	10.45	10.95
Maximum Power Current	[A]	9.39	9.86	10.33	9.49	9.96	10.44

*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m², AM 1.5

*Values without tolerance are typical numbers.

Mechanical Data

Item	Specification
Dimensions	1681 mm (L) ¹ x 998 mm (W) ¹ x 35 mm (D) / 66.2" (L) ¹ x 39.3" (W) ¹ x 1.38" (D)
Weight	25 kg / 55.1 lbs
Solar Cell	60 monocrystalline 6" p-PERC bifacial solar cells
Front Glass	Anti-reflective tempered patterned glass, 2.5 mm
Cell Encapsulation	Polyolefin
Rear Glass	Tempered pattern glass, 2.5 mm
Junction Box	IP 68 rated; Cable: 1,000 mm
Frame	Anodized aluminum frame, original or black
Packaging Configuration	30 pcs Per Pallet, 780 pcs per 40' HQ container

¹: With assembly tolerance of ± 2 mm [± 0.08"]

Operating Conditions

Item	Specification
Mechanical Load	8100 Pa by IEC 61215
Maximum System Voltage	TUV 1500 VDC (IEC)
Series Fuse Rating	20 A
Operating Temperature	-40 to 85 °C


Temperature Characteristics

Item	Specification
Nominal Module Operating Temperature	40.6°C ± 2°C
Temperature Coefficient of Isc	0.06 % / °C
Temperature Coefficient of Voc	-0.28 % / °C
Temperature Coefficient of Pmax	-0.38 % / °C


*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m², temperature 20°C, windspeed 1 m/s.

*Reduction in efficiency from 1000W/m² to 200W/m² at 25°C: 3 ± 2%.


Engineering Drawing (mm)

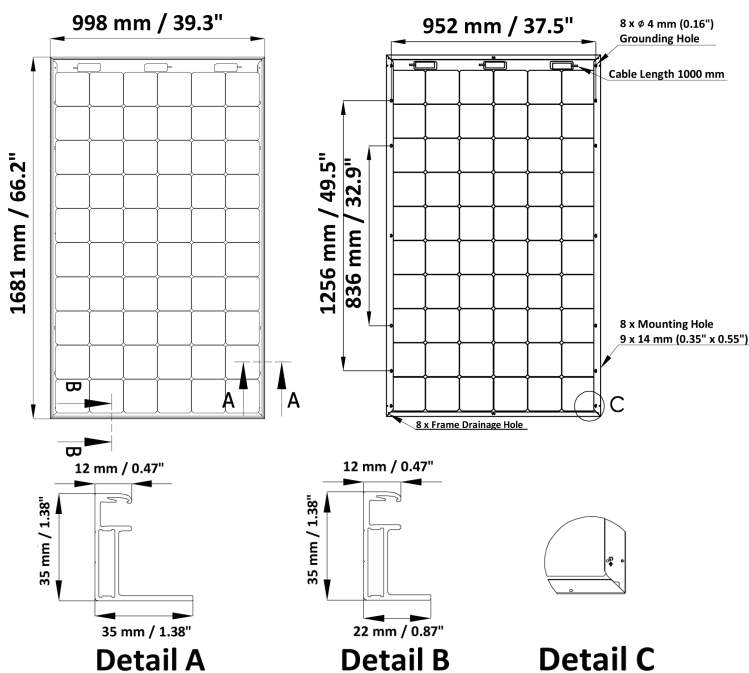

Dependence on Irradiance

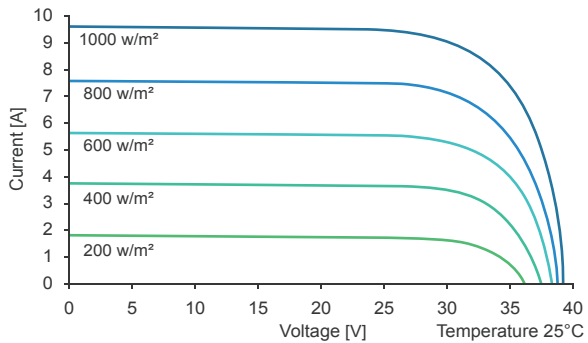

Reliability with Warranty

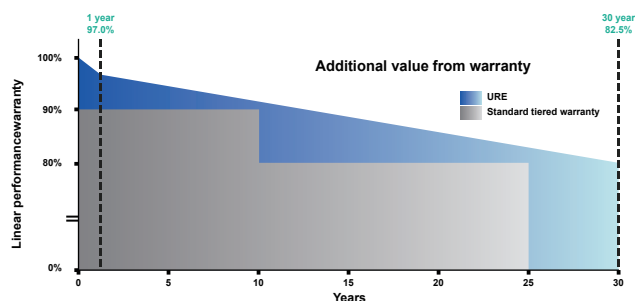

Output warranty
30
Years

Product Guarantee
15
Years

For more information, please visit us at www.urecorp.com

United Renewable Energy Co., Ltd.

Taipei Office

9F, NO. 295, Sec. 2, Tiding Blvd.,
Neihu Dist., Taipei 11493, Taiwan

Tel : +886-2-2656-2000
Fax : +886-2-2656-0593
e-mail : sales@urecorp.com

Headquarters

No. 7, Li-Hsin 3rd Road, Hsinchu Science Park
Hsinchu city 30078, Taiwan

Tel : +886-3-578-0011
Fax : +886-3-578-1255

URE_1809_GloryBifi310_D6L_L3A_WS v.01