

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Gintech Energy Corporation

D6M_H3A

D6M_H3A_310

Also available on the web at
EnergyPal.com/gintech-energy-corporation-solar-panels/d6m_h3a_310

D6M_H3A

60 Cells

Monocrystalline Module

300~315W

Power Output Range

19.4%

Maximum Efficiency

0~+5W

Positive Power Tolerance

Gintech Energy Corporation

GINTECH was established in 2005, headquartered in Taiwan as public listed company which has been one of the global leading manufacturers of solar CELL and MODULE.

Our core competence harmonizes the complete process chain in developing and manufacturing PV Modules with reliable quality and performance for worldwide residential, commercial and utility-scale projects.



Key Features



High Mechanical Loads of Wind and Snow

Certified to bear 2,400Pa wind load, and 5,400Pa snow load



Excellent Low Light Performance

On cloudy days, mornings and evenings



100% EL Double Inspection

Defect-free in module-level




Resistant to Ammonia Corrosion

IEC-62716 certified



25 Years Linear Warranty of Power Output

97% power output for the first year, then power degradation 0.7% per year till 25th year

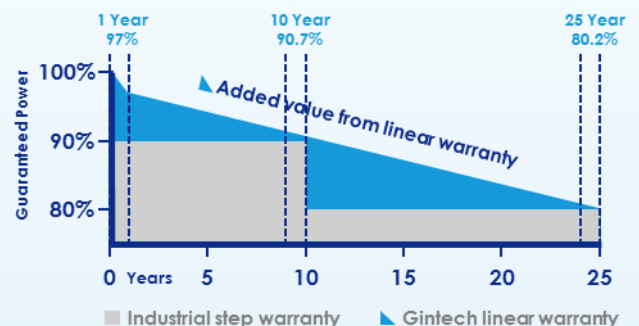

D6M_H3A

Monocrystalline module

ELECTRICAL DATA : STC

Maximum Rating Power (Pmax) (W)	300	305	310	315
Module Efficiency (%)	18.4	18.7	19.1	19.4
Open Circuit Voltage (Voc) (V)	39.39	39.49	39.75	39.99
Maximum Power Voltage (Vmpp) (V)	32.09	32.35	32.57	32.78
Short Circuit Current (Isc) (A)	9.78	9.86	9.91	9.96
Maximum Power Current (Impp) (A)	9.35	9.43	9.52	9.61

STC (Standard Test Condition) : Irradiance of 1000W/m², AM1.5G and cell temperature (25±2)°C

MECHANICAL DATA

Solar Cells	6" Monocrystalline
Cell connection	60 cells (6 x 10)
Module dimension (mm / inch)	1640 x 992 x 35 mm / 64.57" x 39.06" x 1.38"
Weight (kg / lb)	18 kg / 39.7 lbs (approx.)
Glass	Anti-reflective tempered solar glass, 3.2mm(0.13") thickness
Frame	Anodized aluminium frame, original or black
J-Box	IP-67 rated, 3 diodes
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Packaging configuration	30 pcs per Pallet, 840 pcs per 40' HQ container


TEMPERATURE DATA

NOCT	44±2°C
Temp Coefficient of Voc (%/°C)	-0.28
Temp Coefficient of Isc (%/°C)	0.06
Temp Coefficient of Pmax (%/°C)	-0.38


WORKING CONDITIONS

System voltage (DC)	IEC : 1000V / UL : 1000V
Series fuse rating	15A
Temperature cycling range	-40~85°C
static load	5400pa
Application class	Class A


FRONT VIEW & BACK VIEW

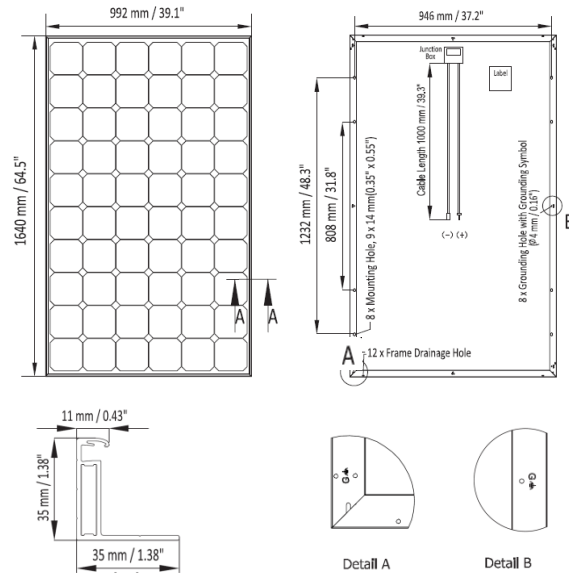

DEPENDENCE ON TEMPERATURE

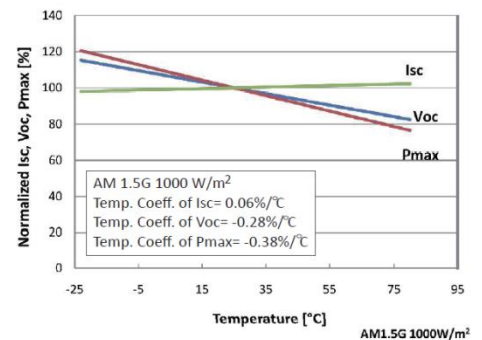

DEPENDENCE ON IRRADIANCE

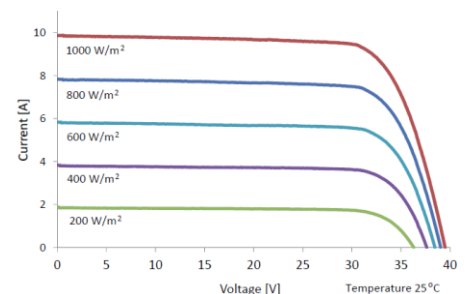

CERTIFICATES



GINTECH ENERGY CORPORATION

ADD: 9F, No.295, Tiding Blvd. Sec2 Taipei City 11493, Taiwan, R.O.C. TEL: +886-2-2656-2000
 FAX: +886-2-2656-0593 EMAIL: modulesales@gintech.com.tw WEB: http://www.gintechenergy.com

The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types