

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Hengdian Group DMEGC Magnetics Co., Ltd.

DMH390-405-M6A-144SW

DMH395M6A-144SW

Also available on the web at

EnergyPal.com/hengdian-group-dmegc-magnetics-co-ltd-solar-panels/dmh395m6a-144sw




Quality. Performance. Value.

PERC MONO CRYSTALLINE MODULE -----HALF CELLS

DMH405M6A-144SW

390 / 395 / 400 / 405

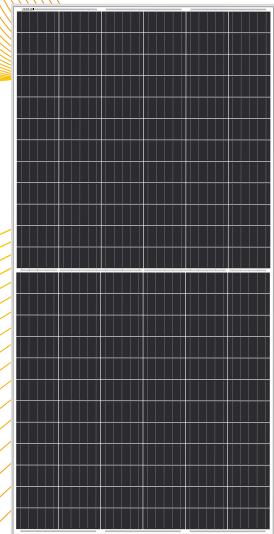

Technology

High module conversion efficiency through superior manufacturing technology



Half-Cut Design

Avoid the hot spot effect
Reduce power degradation



PID Free

Excellent PID resistance according to IEC TS 62804-1



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Value

Our vertically integrated business model allows for competitive pricing and great value


www.dmegcsolar.com

Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

Power Output



- Our IP68 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Warranty



- 10 Years Manufacturers Warranty
- Linear Power Output Warranty, no less than 80.2% at year 25th

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly




Electrical Specifications

* STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc (V)	Module Efficiency
DMH390M6A-144SW	390	0/+3%	9.70	40.26	10.11	49.48	19.38%
DMH395M6A-144SW	395	0/+3%	9.78	40.42	10.19	49.65	19.63%
DMH400M6A-144SW	400	0/+3%	9.86	40.62	10.27	49.82	19.88%
DMH405M6A-144SW	405	0/+3%	9.94	40.79	10.35	49.99	20.13%

Mechanical Data

Cell Type	DMPD5B159-223(1/2)
Cell Arrangement	144(6x24)
Module Structure	Glass/EVA/Backsheet(white)
Glass Thickness	3.2mm
Application Class	Class A at IEC 61730
Junction Box Rating	IP67/IP68
Cables	1000mm/4mm ²
Connector Type	MC4/MC4 Compatible
Fire Rating Class	C

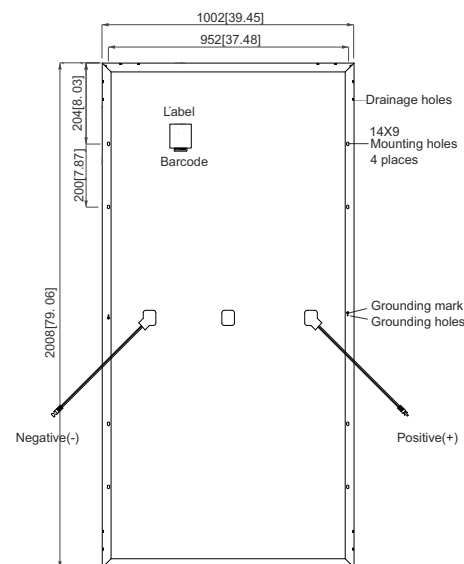

(Back side)
Note:mm[inch]

Maximum Ratings

Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa
Maximum System Voltage	1000V/1500V
Maximum Series Fuse Rating	20A
Number of Diodes	3


Packaging

Module Dimensions	2008x1002x40mm
Weight	23.1kg
Pallet Dimensions	2060x1130x1140mm
Container	40' HQ
Pieces per Pallet	27
Pallets per Container	22
Pieces per Container	594
Gross Weight per Pallet	665kg
Gross Weight per Container	14630kg


Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42°C±3°C
Temperature Coefficient of Isc	+0.038%/°C
Temperature Coefficient of Voc	-0.270%/°C
Temperature Coefficient of Pmax	-0.365%/°C

Current-Voltage&Power-Voltage Curve(405W)

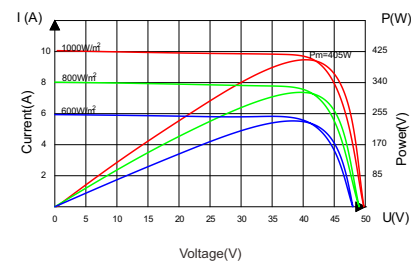

Temperature Dependence of Isc, Voc, Pmax(°C)

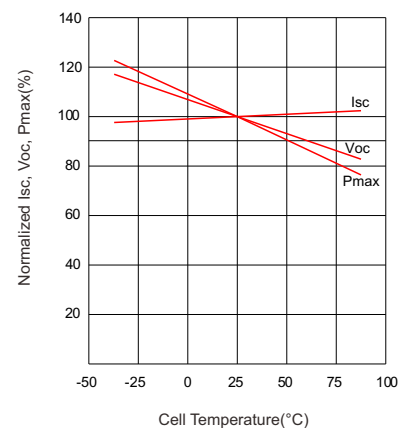

Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
www.chinadmegc.com www.dmegcsolar.com