

**For a Free Quote:**

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Eco Delta Power Co., Ltd.  
ECO - 300-320M-60(AG)  
ECO-300M-60**

Also available on the web at  
[EnergyPal.com/eco-delta-power-co-ltd-solar-panels/eco-300m-60](http://EnergyPal.com/eco-delta-power-co-ltd-solar-panels/eco-300m-60)

# ECO DELTA 5BB Mono Anti glare module PV Module


**ECO-300-320M-60(AG)**



## ANTI GLARE GLASS



AG glass is used to make sunlight forming a diffuse reflection on the surface of modules, thus reducing visual discomfort. AG modules can be used in particular environments.

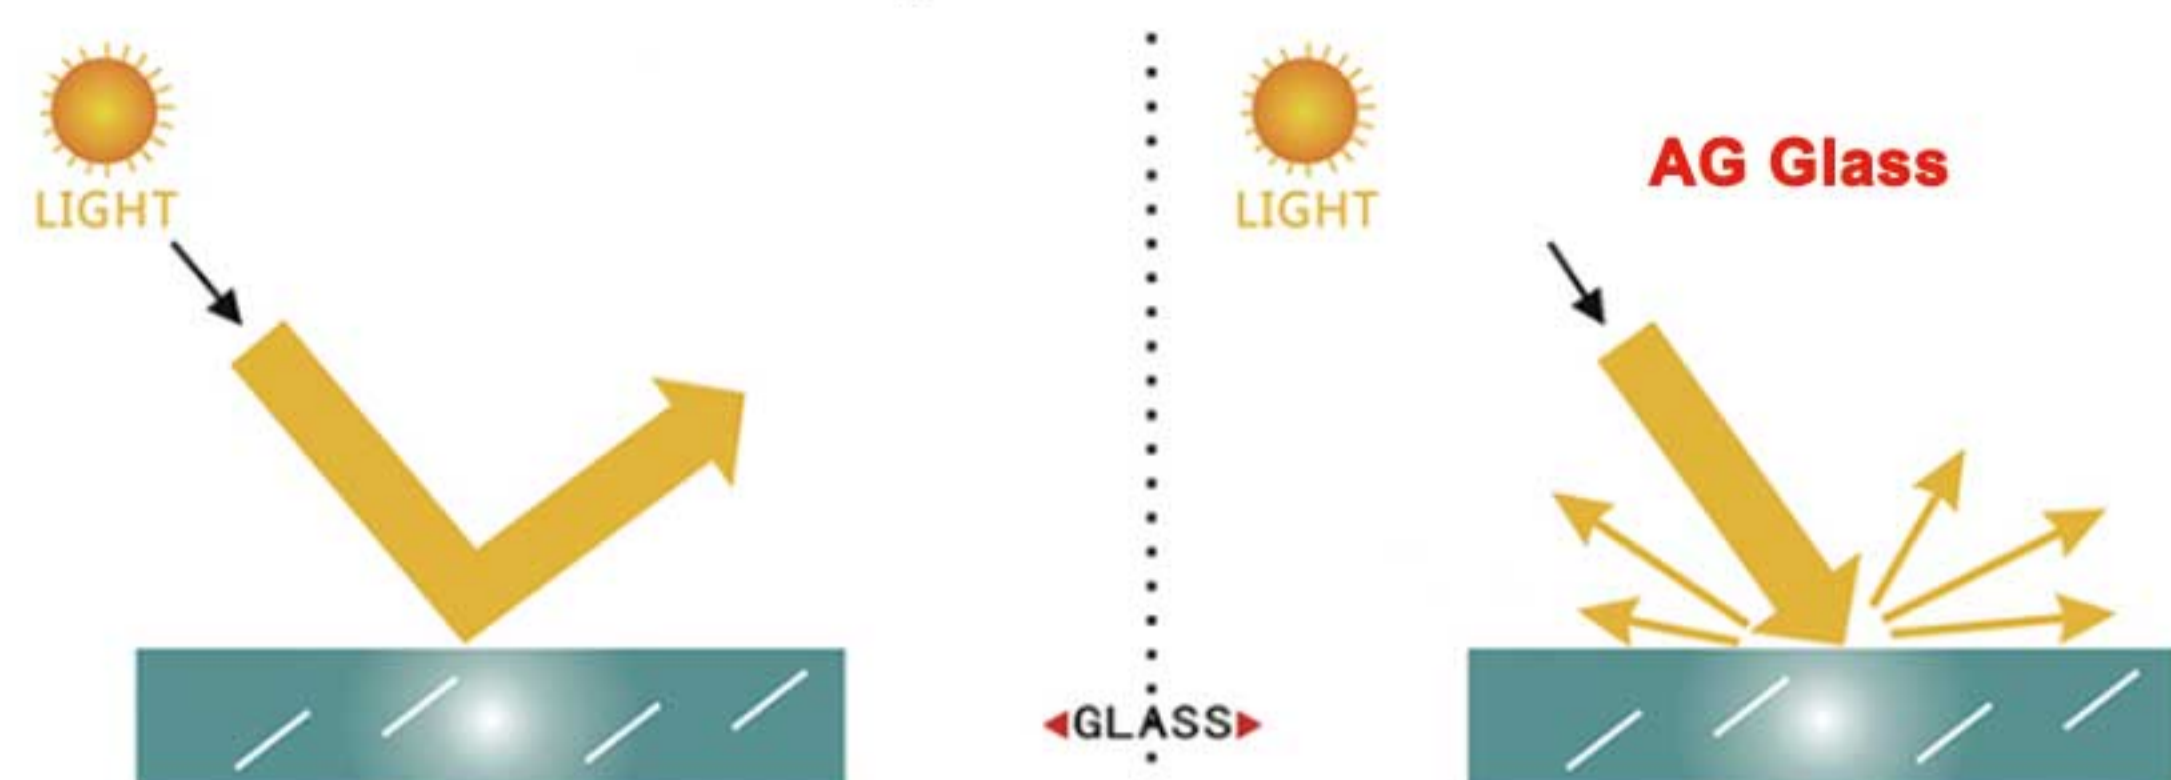

## Higher Module Efficiency

Brings 0-+3W positive tolerance on label rating power provides higher Kwh



## INNOVATIVE PERC CELL TECHNOLOGY

Excellent cell efficiency and output.



## REDUCE SHADOW LOSS

Effectively reduces the effect of shadow on the module surface.



## REDUCE INTERNAL MISMATCH LOSS

Reduces mismatch loss and improves output.



## PASSED HAIL TEST


Certified to hail resistance: ice ball size (d=45mm) and ice ball velocity (v=30.7m/s).



## PID RESISTANCE

Excellent PID resistance at 96 hours (@85°C/85%) test, and also can be improved to meet higher standards for the particularly harsh environment

## LINEAR PERFORMANCE WARRANTY

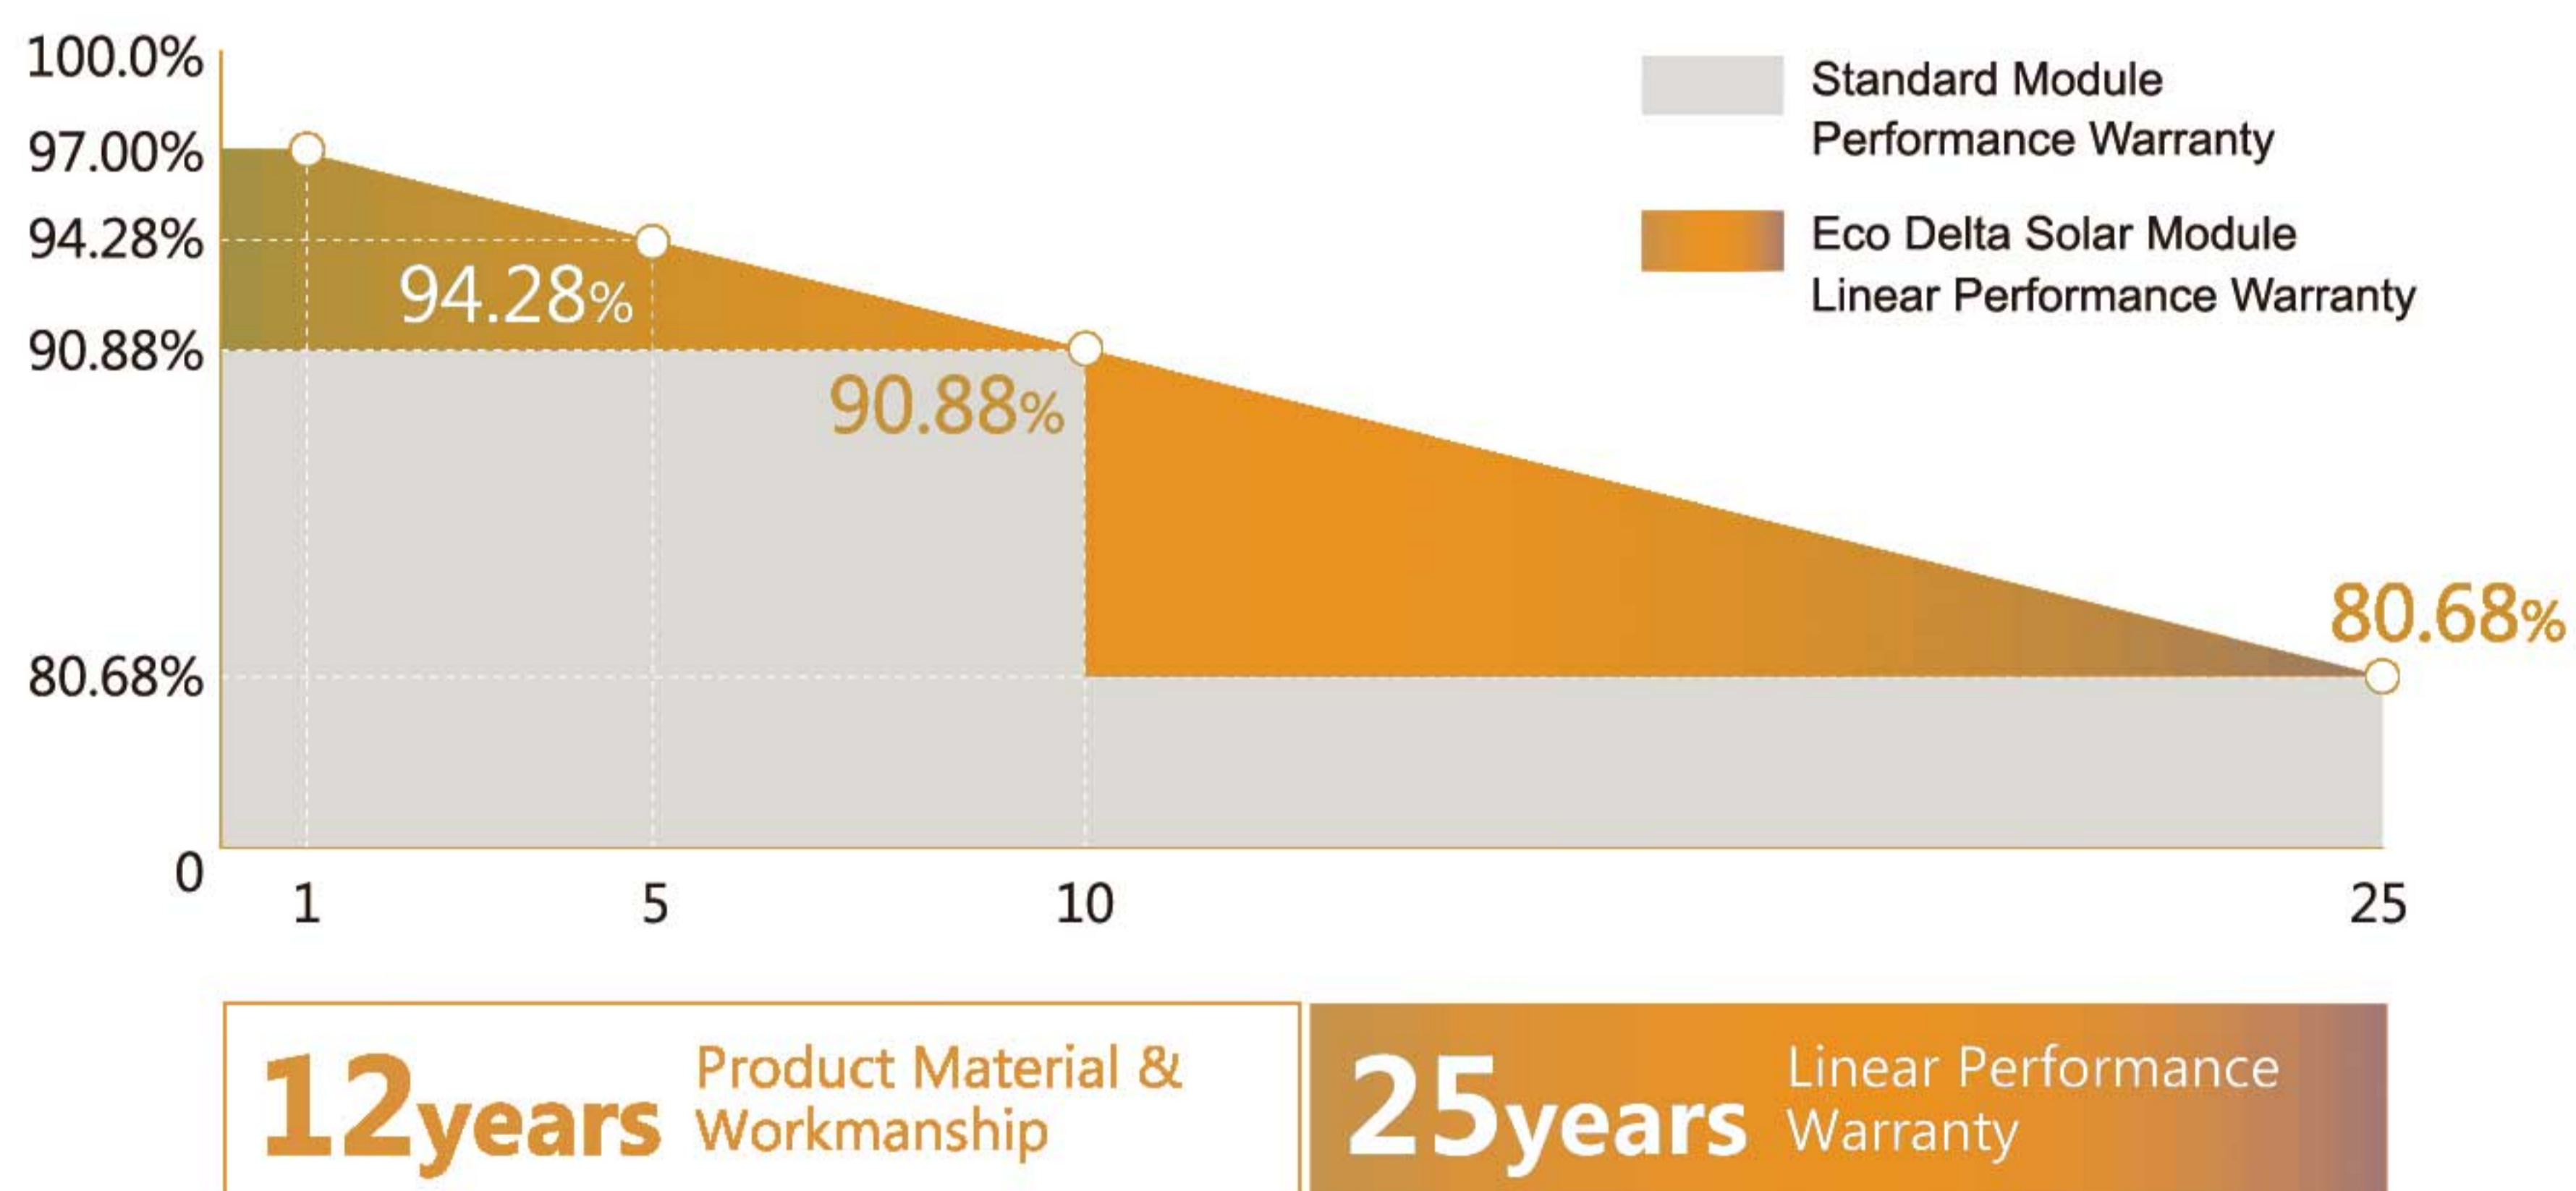

## QUALITY WARRANTY

Eco Delta guarantees that defects will not appear in materials and workmanship defined by IEC61215 or IEC61730 under normal installation, use and maintenance as specified in Eco Delta's installation manual for 12 years from the warranty starting date.

ISO9001  
ISO14001  
OHSAS18001



## About Eco Delta

Eco Delta Power Co.,Ltd specializes in research, development, production, and sales of solar PV products as well as provision of related services and provides customers around the world with high-quality PV products.

[www.ecodeltapower.com](http://www.ecodeltapower.com)

# ECO DELTA 5BB Mono Anti glare module PV Module

## ECO-300-320M-60(AG)



### ELECTRICAL DATA @ STC

		ECO-300M-60	ECO-305M-60	ECO-310M-60	ECO-315M-60	ECO-320M-60
Peak Power(Pmax)	(W)	300	305	310	315	320
Maximum Power Voltage (Vmp)	(V)	32.60	32.90	33.10	33.35	33.55
Maximum Power Current(Imp)	(A)	9.19	9.28	9.37	9.45	9.54
Open-circuit Voltage (Voc)	(V)	39.80	40.00	40.40	40.80	41.00
Short-circuit Current(Isc)	(A)	9.77	9.85	9.91	9.98	10.05
Module Efficiency	(%)	18.30	18.60	18.90	19.20	19.55
Operating Temperature		-40°C~+85°C				
Maximum System Voltage		<input type="checkbox"/> 1000V <input type="checkbox"/> 1500V				
Maximum Series Fuse Rating		15A				
Power Tolerance		0~+3%				

\*STC (Standard Test Condition): Irradiance 1000W/ m<sup>2</sup>, Module Temperature 25°C, AM 1.5

### ELECTRICAL DATA @ NMOT

		ECO-300M-60	ECO-305M-60	ECO-310M-60	ECO-315M-60	ECO-320M-60
Peak Power(Pmax)	(W)	223	227	231	235	239
MPP Voltage (Vmp)	(V)	30.40	30.60	30.90	31.10	31.30
MPP Current(Imp)	(A)	7.35	7.42	7.49	7.55	7.64
Open Circuit Voltage (Voc)	(V)	37.10	37.30	37.50	37.75	37.95
Short Circuit Current(Isc)	(A)	7.78	7.84	7.91	7.97	8.04

\*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

### TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax		-0.39%
Temperature coefficient of Voc		-0.29%
Temperature coefficient of Isc		0.05%
NMOT		44±2°C

### MECHANICAL DATA

Cell Type		Mono-Crystalline, 156.75*156.75mm
Cell Arrangement		60pcs (6*10)
Dimension (L*W*H)		1650*992*35mm
Weight		18.0kg
Front Cover		3.2mm Tempered Glass
Frame		Anodized Aluminium Alloy
Junction Box		IP67, 3 Bypass Diodes
Cable Type		4mm <sup>2</sup>
Length of Cable		1000mm
Connector		PV Connector

### OPTIONAL


Frame		<input type="checkbox"/> Black
Backsheet		<input type="checkbox"/> Black
Connector		<input type="checkbox"/> Original MC4
Cable		<input type="checkbox"/> Customized
Module Size		<input type="checkbox"/> Customized

### PACKING MANNER

Packing Type		40'HQ
Piece/Pallet		30
Pallet/Container		28
Piece/Container		840

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, ECO DELTA POWER CO., LTD Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Current-Voltage Curve under different irradiance

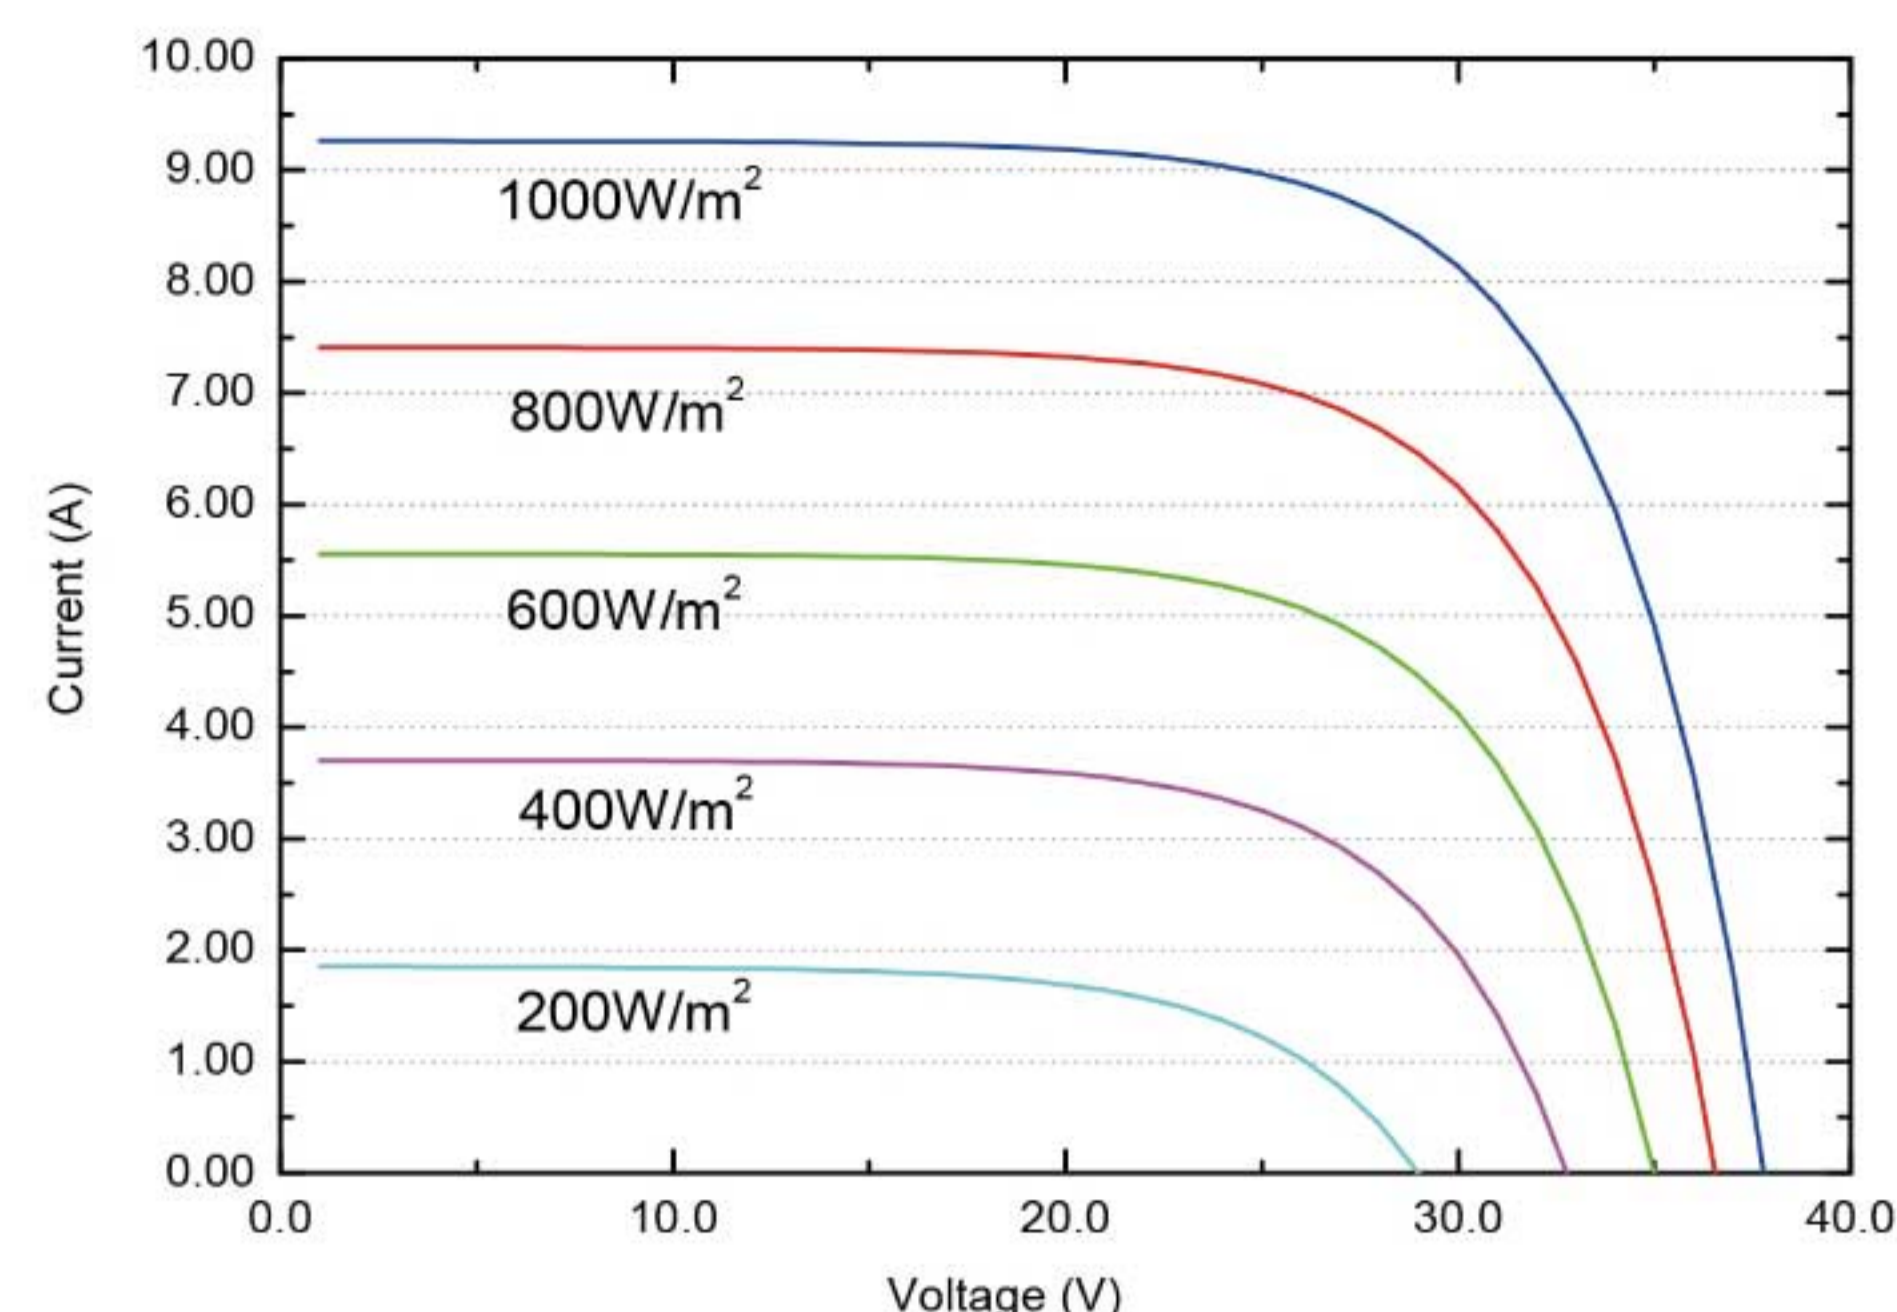

Current-Voltage Curve under different working temperatures

