

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Eco Delta Power Co., Ltd.

ECO - 380-400M-72D








ECO-390M-72D

Also available on the web at
EnergyPal.com/eco-delta-power-co-ltd-solar-panels/eco-390m-72d

ECO DELTA High Efficiency 5BB Poly Big Cell PV Module


ECO-380-400M-72D



- 
Higher Module Efficiency
 Brings 0-+3W positive tolerance on label rating power provides higher Kwh
- 
INNOVATIONAL 5-BUSBAR 158.75 CELLS
 Reduces the cell series resistance and internal stress, decreases the risk of mirco-crack and improves the module output.
- 
INNOVATIVE PERC CELL TECHNOLOGY
 Excellent cell efficiency and output.
- 
REDUCE SHADOW LOSS
 Effectively reduces the effect of shadow on the module surface.
- 
REDUCE INTERNAL MISMATCH LOSS
 Reduces mismatch loss and improves output.
- 
PASSED HAIL TEST
 Certified to hail resistance: ice ball size (d=45mm) and ice ball velocity (v=30.7m/s).
- 
PID RESISTANCE
 Excellent PID resistance at 96 hours (@85°C/85%) test, and also can be improved to meet higher standards for the particularly harsh environment



LINEAR PERFORMANCE WARRANTY

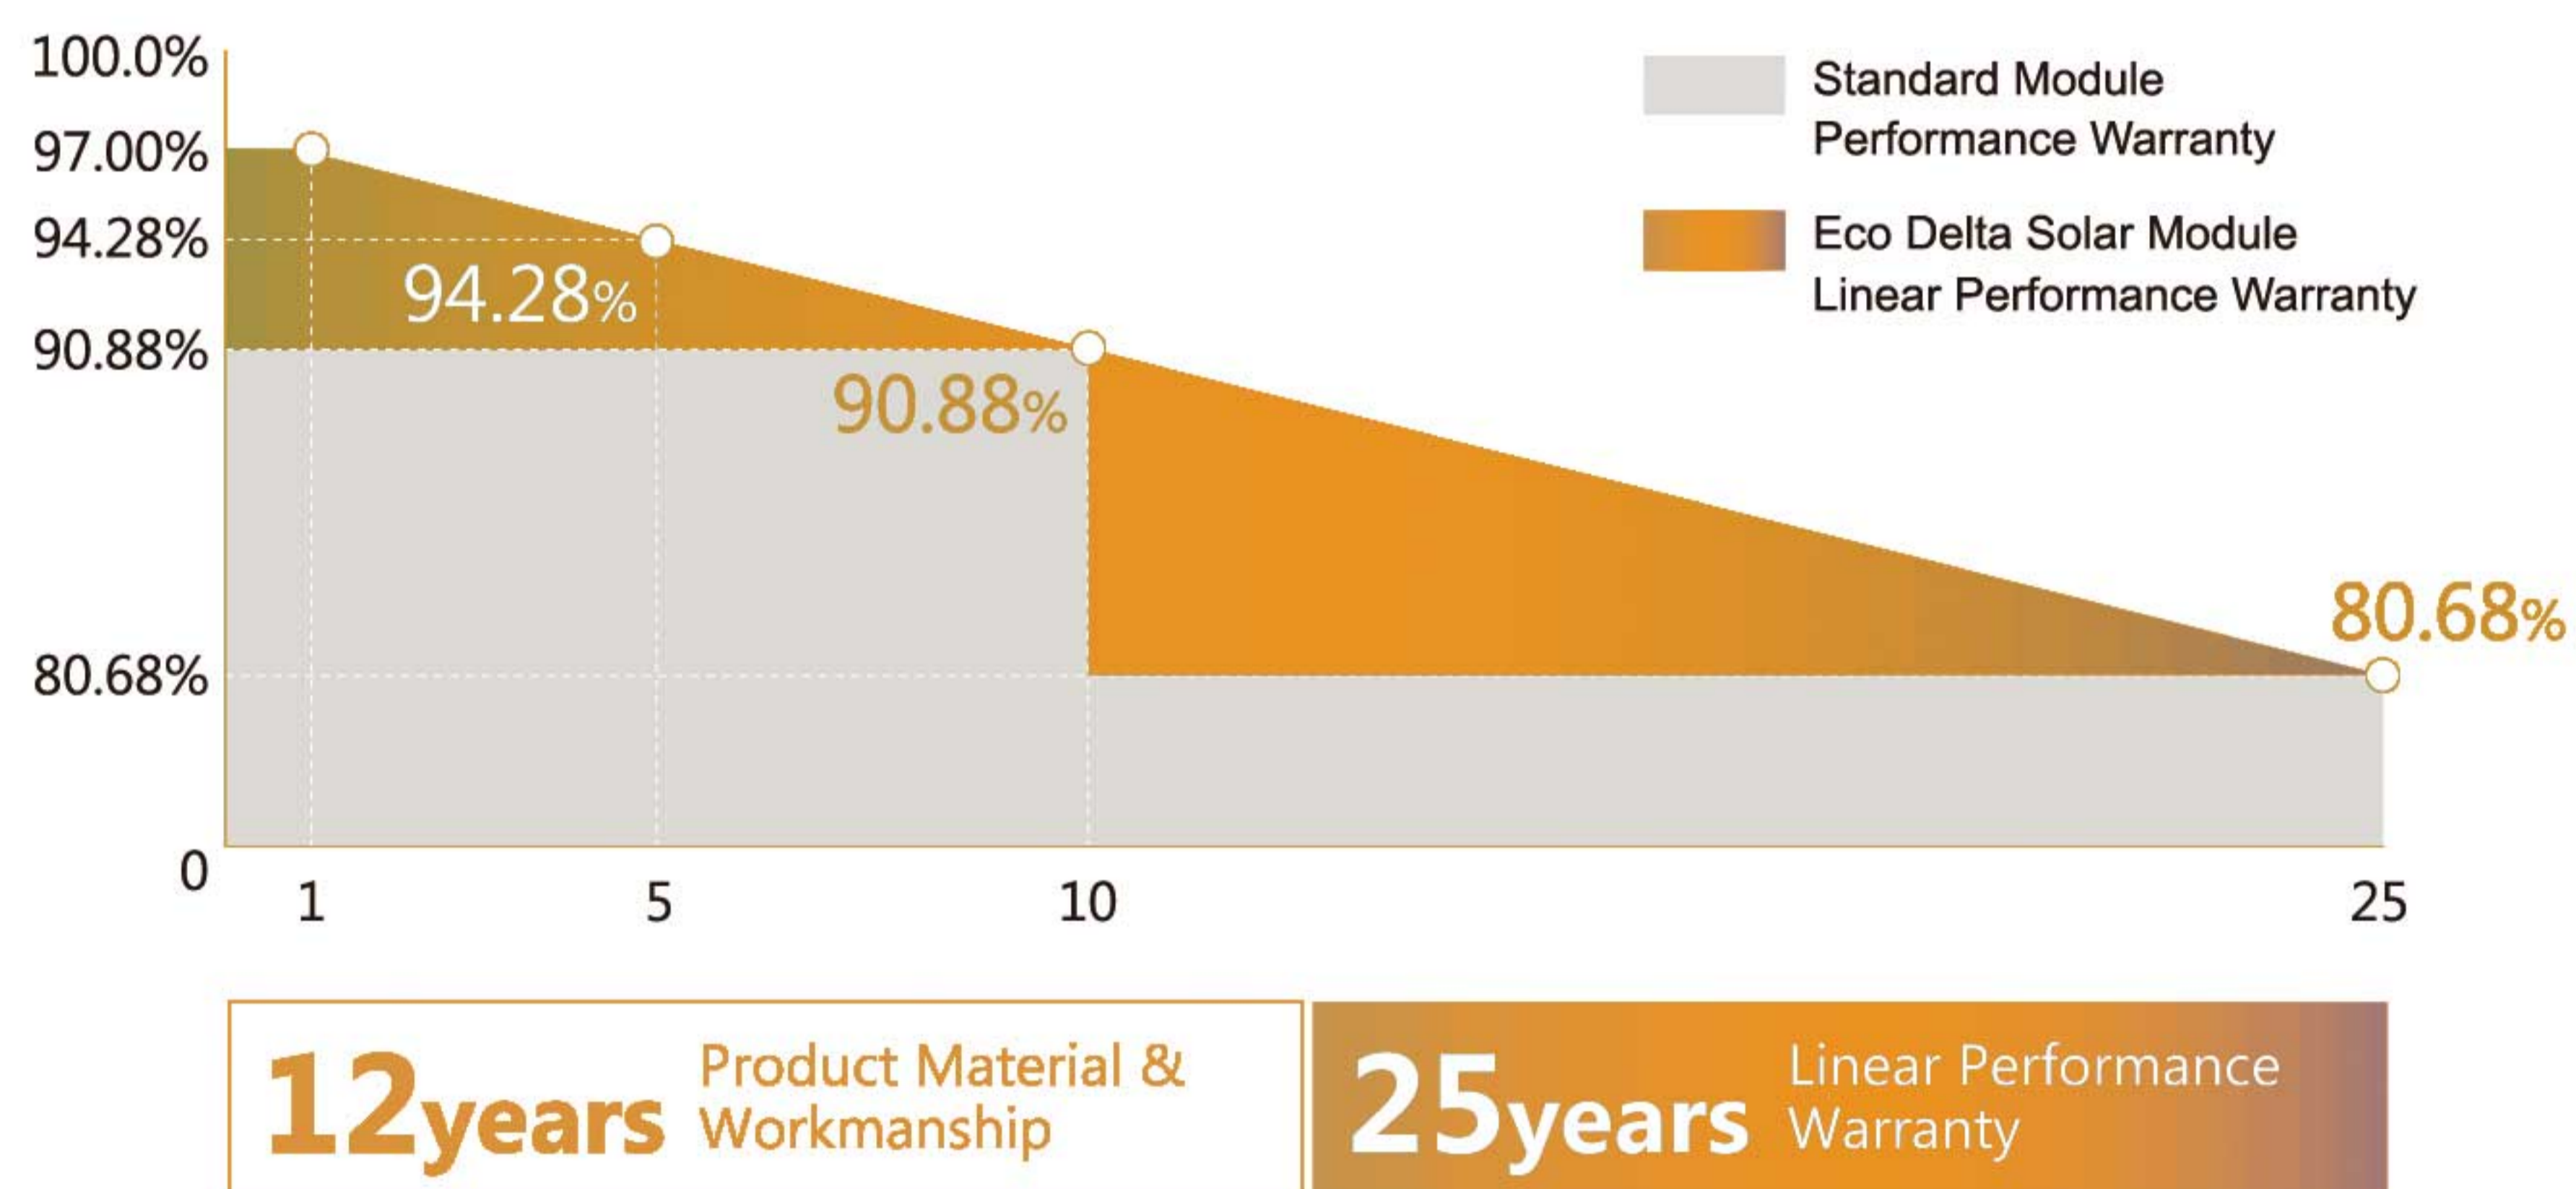

QUALITY WARRANTY

Eco Delta guarantees that defects will not appear in materials and workmanship defined by IEC61215 or IEC61730 under normal installation, use and maintenance as specified in Eco Delta's installation manual for 12 years from the warranty starting date.

ISO9001
ISO14001
OHSAS18001



About Eco Delta

Eco Delta Power Co.,Ltd specializes in research, development, production, and sales of solar PV products as well as provision of related services and provides customers around the world with high-quality PV products.

www.ecodeltapower.com

ECO DELTA High Efficiency 5BB Mono Big Cell PV Module

ECO-380-400M-72D



ELECTRICAL DATA @ STC		ECO-380M-72D	ECO-385M-72D	ECO-390M-72D	ECO-395M-72D	ECO-400M-72D
Peak Power(Pmax)	(W)	380	385	390	395	400
Maximum Power Voltage (Vmp)	(V)	39.10	39.29	39.48	39.66	39.85
Maximum Power Current(Imp)	(A)	9.72	9.80	9.88	9.96	10.04
Open-circuit Voltage (Voc)	(V)	48.50	48.69	48.88	49.06	49.25
Short-circuit Current(Isc)	(A)	10.18	10.26	10.34	10.42	10.50
Module Efficiency	(%)	19.15	19.40	19.65	19.90	20.16
Operating Temperature		-40°C~+85°C				
Maximum System Voltage		<input type="checkbox"/> 1000V <input type="checkbox"/> 1500V				
Maximum Series Fuse Rating		15A				
Power Tolerance		0~+3%				

*STC (Standard Test Condition): Irradiance 1000W/ m² , Module Temperature 25°C, AM 1.5

ELECTRICAL DATA @ NMOT		ECO-380M-72D	ECO-385M-72D	ECO-390M-72D	ECO-395M-72D	ECO-400M-72D
Peak Power(Pmax)	(W)	281	285	289	292	296
MPP Voltage (Vmp)	(V)	35.90	36.08	36.31	36.37	36.59
MPP Current(Imp)	(A)	7.83	7.90	7.96	8.03	8.09
Open Circuit Voltage (Voc)	(V)	44.52	44.71	44.95	45.00	45.23
Short Circuit Current(Isc)	(A)	8.20	8.27	8.34	8.40	8.46

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m² , Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.39%
Temperature coefficient of Voc	-0.29%
Temperature coefficient of Isc	0.05%
NMOT	44±2°C

MECHANICAL DATA

Cell Type	Mono-Crystalline, 158.75*158.75mm
Cell Arrangement	72pcs (6*12)
Dimension (L*W*H)	1980*1002*40mm
Weight	22.7kg
Front Cover	3.2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67, 3 Bypass Diodes
Cable Type	4mm ²
Length of Cable	1200mm
Connector	PV Connector

OPTIONAL


Frame	<input type="checkbox"/> Black
Backsheet	<input type="checkbox"/> Black
Connector	<input type="checkbox"/> Original MC4
Cable	<input type="checkbox"/> Customized
Module Size	<input type="checkbox"/> Customized

PACKING MANNER

Packing Type	40'HQ
Piece/Pallet	27
Pallet/Container	22
Piece/Container	594

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, ECO DELTA POWER CO., LTD Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Current-Voltage Curve

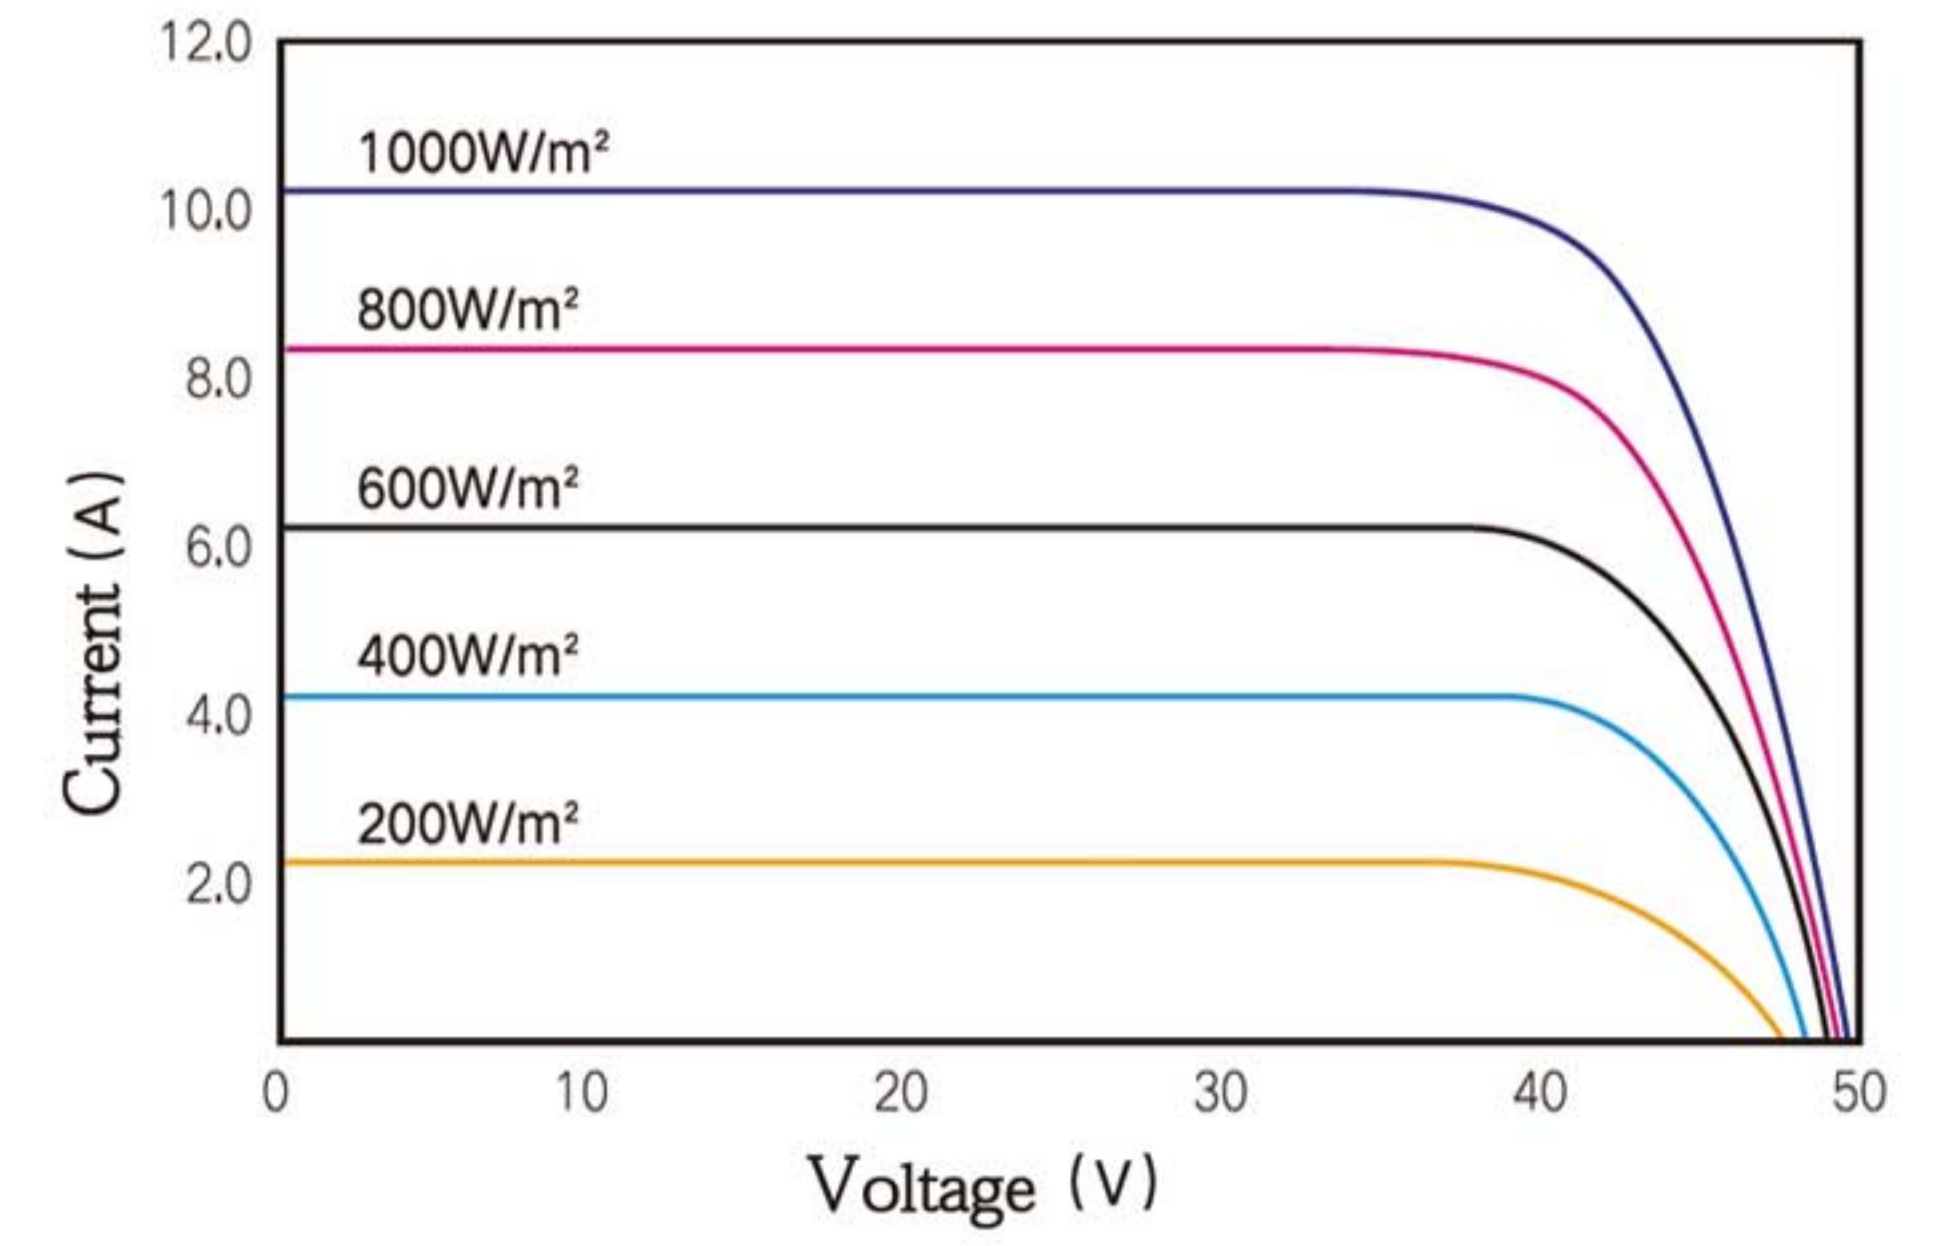

Power-Voltage Curve

