

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Wuxi Saijing Solar Co., Ltd.**


**ECS-260-290M60**

**ECS-260M60**

Also available on the web at  
[EnergyPal.com/wuxi-saijing-solar-co-ltd-solar-panels/ecs-260m60](http://EnergyPal.com/wuxi-saijing-solar-co-ltd-solar-panels/ecs-260m60)

# MONO-CRYSTALLINE MODULE

ECS-260/265/270/275/280/285/290M60

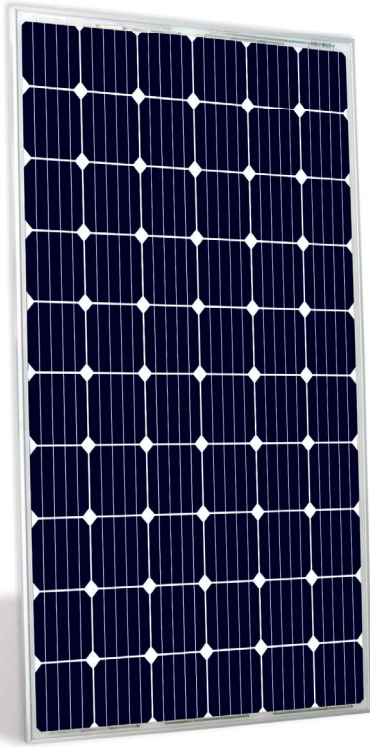

High conversion efficiency



Extremely environmental testing



Salt mist corrosion resistant



IP67 Junction box



Strong compressive strength



Fire test approved



PID Resistant

## GIVING YOU MORE



3% positive tolerance




Series of internal harsh tests



Authorised photovoltaic certificates



Linear performance warranty

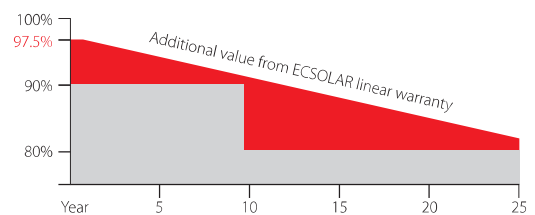

[www.ecsolar.com](http://www.ecsolar.com)

ECSOLAR (Wuxi Saijing Solar Co., Ltd)

Industrial Park C, Guanlin town, Yixing city, Jiangsu Province, P. R. China


Tel: +86 25 8659 2702 Fax: +86 25 8659 2703 E-mail: [sales@ecsolar.com](mailto:sales@ecsolar.com)

### Electrical Characteristics under STC\*

Module Type	ECS-260M60	ECS-265M60	ECS-270M60	ECS-275M60	ECS-280M60	ECS-285M60	ECS-290M60
Maximum Power-Pmax (Wp)	260	265	270	275	280	285	290
Voltage at Maximum Power-Vmp (V)	30.7	31.1	31.5	31.9	32.3	32.7	33.1
Current at Maximum Power-Imp (A)	8.47	8.52	8.57	8.62	8.67	8.72	8.76
Open Circuit Voltage-Voc (V)	37.7	38.1	38.5	38.9	39.3	39.8	40.2
Short Circuit Current-Isc (A)	8.80	9.27	9.35	9.43	9.50	9.55	9.62
Module Efficiency-ηm (%)	16.0	16.3	16.6	16.9	17.1	17.5	17.8
Power Tolerance (%)	0/+3	0/+3	0/+3	0/+3	0/+3	0/+3	0/+3

### Mechanical Characteristics

Cell Type	Mono-crystalline	156x156 mm (6 inches)
Number of Cells	60 (6x10)	
Dimension	1640x992x35 mm (64.57x39.06x1.38 inches)	
Weight	20.0 kg	
Front Glass	Low Iron Tempered Glass	
Encapsulant	EVA	
Frame	Anodized Aluminum Alloy	

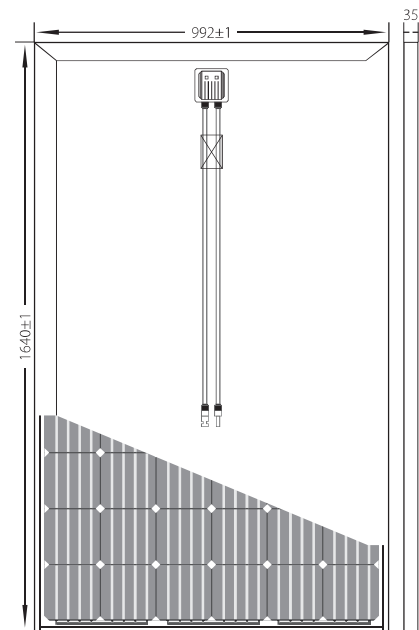

### Temperature Characteristics




NOCT*	45±2°C
Temperature Coefficient of Pmax (%)	-0.40/°C
Temperature Coefficient of Voc (%)	-0.31/°C
Temperature Coefficient of Isc (%)	0.04/°C

### Maximum System Ratings

Operating Temperature	-40°C to +80°C
Maximum System Voltage	1000V DC
Maximum Series Fuse Rating	16A

### Warranty

- 12 years product warranty
- 12 years warranty on 90% power output
- 25 years warranty on 80% power output

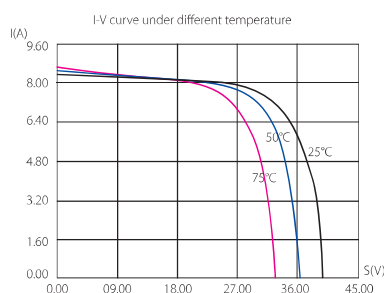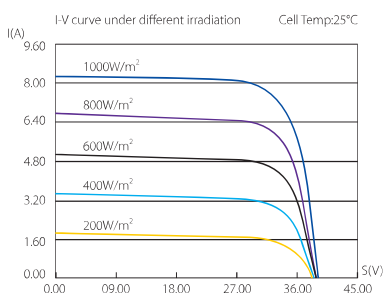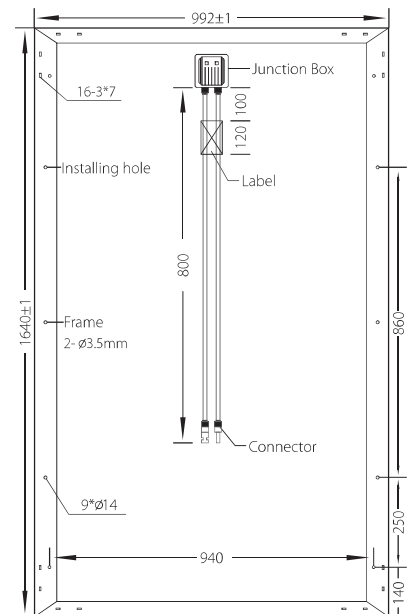

\*STC (Standard Testing Conditions): Irradiance 1000 W/m<sup>2</sup>, cell temperature 25 °C, AM=1.5  
ambient temperature 20 °C, wind speed 1 m/s

\*NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m<sup>2</sup>,  
The specifications in this datasheet are subjected to change without prior notice