

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Eco Delta Power Co., Ltd.

ED35-40-6P

ED40-6P

Also available on the web at
EnergyPal.com/eco-delta-power-co-ltd-solar-panels/ed40-6p



Poly-crystalline Solar Module

ED35-6P
ED40-6P

Warranty


10-year repair and workmanship warranty
12-year warranty at 90% power output
25-year warranty at 80% power output

Typical Electrical Characteristics




Models	ED35-6P	ED40-6P
Max. Power (Pmax)	35Wp	40Wp
Optimum Operating Voltage (Vm)	17.2V	17.8V
Optimum Operating Current (Im)	2.04A	2.25A
Open-circuit Voltage (Voc)	21.4V	22.4V
Short-circuit Current (Isc)	2.16A	2.38A
Module efficiency	12.7%	14.5%

Note: the specifications are obtained under the Standard Test Condition (STC): 1,000W/m², Am 1.5, Cell Temperature 25°C

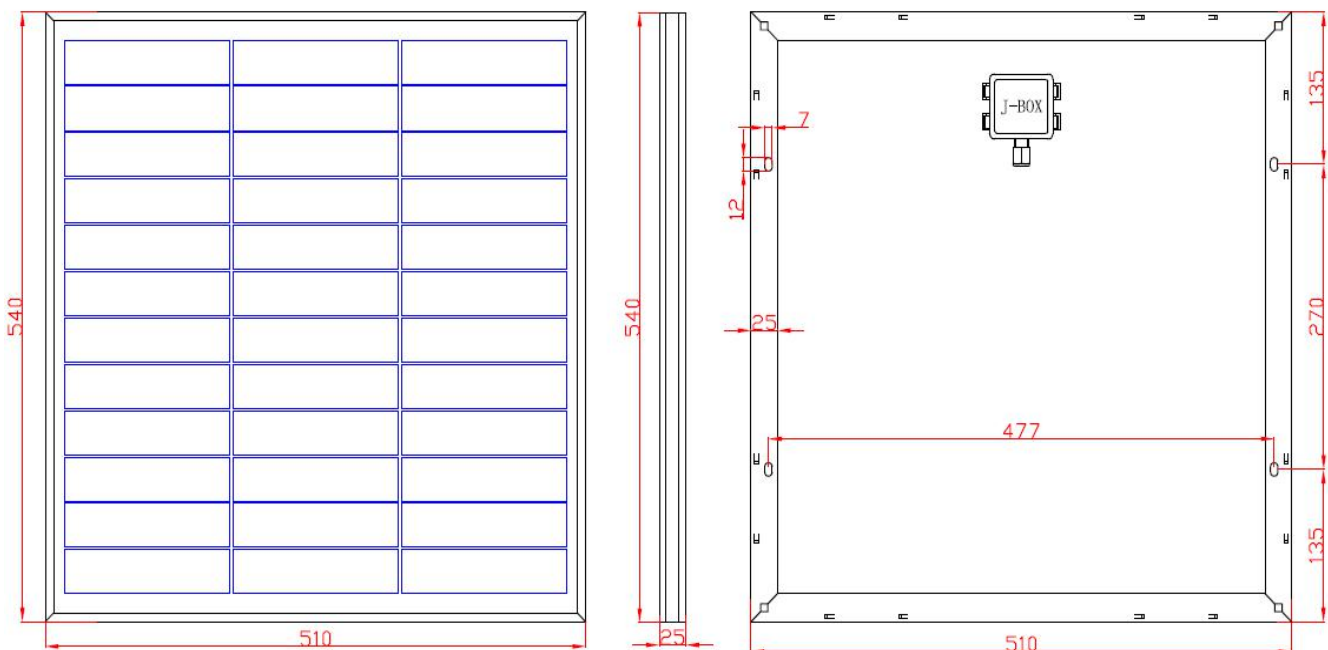

Solar cell	Poly
Power Tolerance (Pmax)	0 ~ +3%
Numbers of cells	36pcs of cells in series
Module Dimension	540×510×30mm
Weight	3.5Kg
Max. System Voltage	1000V DC
Max. Series Fuse Rating	—
Temperature cycling range	-40℃ ~ +85℃
NOTC	47℃
Temperature coefficients of Isc	(+0.06%/℃)
Temperature coefficients of Voc	(-0.35%/℃)
Temperature coefficients of Pmax	(-0.4%/℃)
Load Capacity	1200pcs/ 20'GP
	2700pcs/ 40'GP

Certification

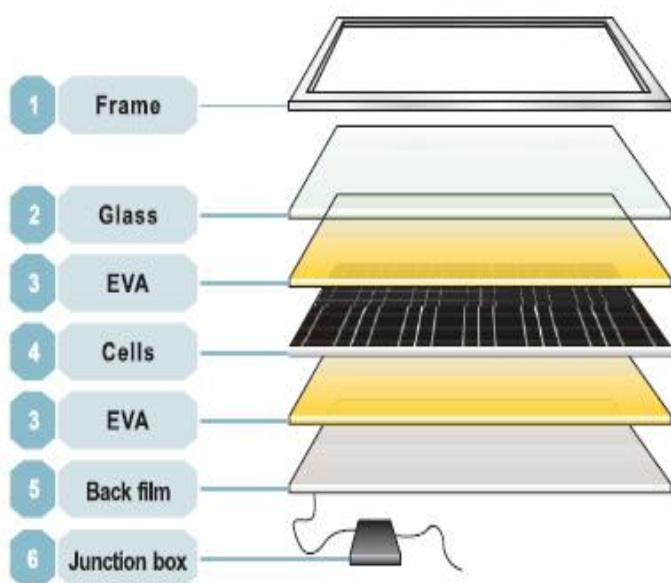

The Structure of Solar Modules

Cells

The hi-efficiency of mono and poly solar cells ensure adequate power for panels.

Glass

Low-iron tempered glass, 3.2mm thickness with higher reflectivity.

EVA

Higher transmission rate, antioxidant capacity and temperature resistance, no expansion or contraction.

Back film

Increase efficiency of modules slightly and reduce module's temperature. Aging resistance, corrosion resistance and airtight.

Aluminum Frame

Using the framework of the anodized aluminum frame with high intensity, mechanical shock resistance capacity.