

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet


EGing Photovoltaic Technology Co., Ltd.

EG-245-265M60-C-DG

EG-265 M60-C-DG

Also available on the web at

EnergyPal.com/eging-photovoltaic-technology-co-ltd-solar-panels/eg-265-m60-c-dg

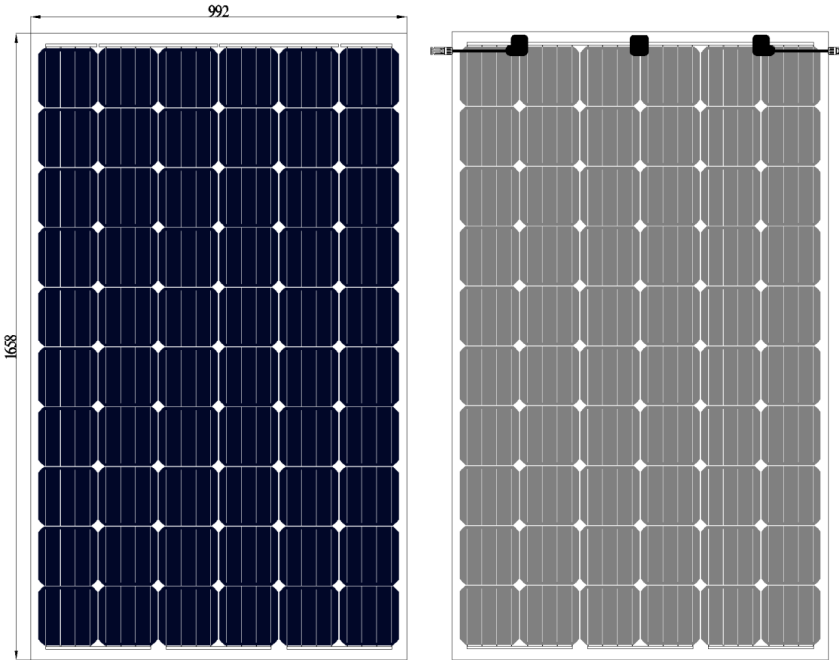

Mechanical Characteristics

Number of cells (pcs)	60
Size of cell (mm)	156*156
Type of cell	Mono
Junction box	TL-BOX029
Size of module (mm)	1658*992*6.2
Weight (kg)	23.0
Cables/connectors	PV1-F,4mm ² , MC4 compatible

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Electrical Characteristics

STC	EG-245 M60-C-DG	EG-250 M60-C-DG	EG-255 M60-C-DG	EG-260 M60-C-DG	EG-265 M60-C-DG
Pmax (W)	245	250	255	260	265
Vmp (V)	30.44	30.64	30.77	30.92	31.07
Imp (A)	8.05	8.16	8.29	8.41	8.53
Voc (V)	37.29	37.51	37.72	37.93	38.15
Isc (A)	8.62	8.72	8.84	8.95	9.07
Module efficiency (%)	15.1	15.4	15.6	15.9	16.2
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	15				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	- (0.43±0.05)			
	Isc (%/°C)	0.04±0.015			
	Voc (%/°C)	- (0.325±0.1)			

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

NOCT	EG-245 M60-C-DG	EG-250 M60-C-DG	EG-255 M60-C-DG	EG-260 M60-C-DG	EG-265 M60-C-DG
Pmax (W)	176.71	180.31	183.92	187.53	191.13
Vmp (V)	27.49	27.67	27.79	27.92	28.06
Imp (A)	6.43	6.51	6.61	6.72	6.81
Voc (V)	34.21	34.41	34.60	34.80	34.99
Isc (A)	6.97	7.06	7.15	7.23	7.33
Power tolerance (%)	±3%				

NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

I-V Curves

