

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

EnergyPal

Solar Panel Guide Specification Data Sheet

Eco Green Energy

EGE-60-65P-36

EGE-65P-36

Also available on the web at
EnergyPal.com/eco-green-energy-solar-panels/ege-65p-36



ECO GREEN ENERGY

EGE-60P-36 POLYCRYSTALLINE PHOTOVOLTAIC MODULE



4 busbars cells, with efficiency up to 18.8 %.




IP65 or IP67 junction box for long term weather endurance.




High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa.




High transmissivity, low-iron tempered glass.

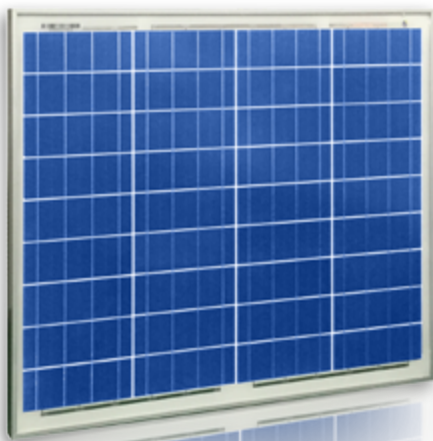

Engineering drawings

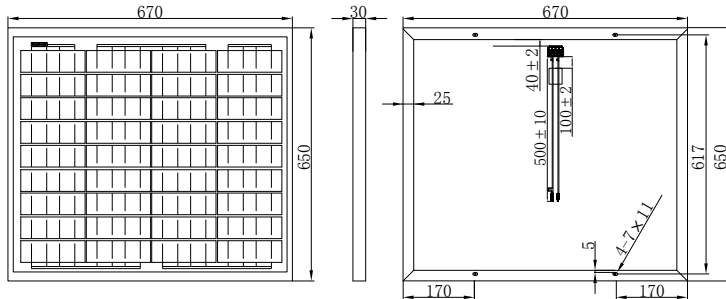

IV curves

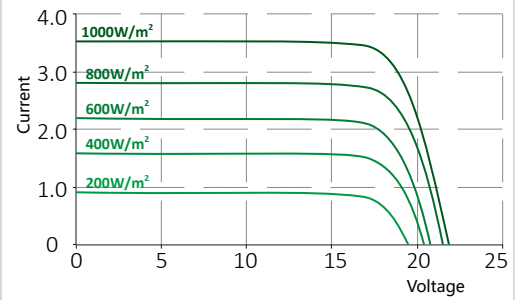

Temperature characteristics

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.41 %/°C
Temperature coefficient of Voc	-0.31 %/°C
Temperature coefficient of Isc	+0.06 %/°C

Electrical characteristics at STC*

Power output (Pmax)	60 W
Power output tolerance	0~3 %
Panel efficiency	13.78 %
Maximum power voltage (Vmp)	18.55 V
Maximum power current (Imp)	3.23 A
Open circuit voltage (Voc)	22.66 V
Short circuit current (Isc)	3.55 A

*Standard test conditions:
irradiance: 1000 W/m² • cell temperature: 25 °C • AM: 1.5

General characteristics

Cell type	Polycrystalline (156×62.5 mm)
Number of cells	36
Dimensions	650×670×30 mm
Weight	4.9 kg
Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP65 or IP67
Cable	0.5 m
Connector	MC4 or MC4 compatible

Electrical characteristics at NOCT*

Power output (Pmax)	44 W
Maximum power voltage (Vmp)	17.13 V
Maximum power current (Imp)	2.59 A
Open circuit voltage (Voc)	21.03 V
Short circuit current (Isc)	2.88 A

*Nominal operating cell temperature:
irradiance: 800 W/m² • ambient temperature: 20 °C • AM: 1.5 • wind speed: 1 m/s

Packaging

Per box	2 pcs
Per 20ft GP container	1600 pcs
Per 40ft GP container	3300 pcs
Per 40ft HQ container	3800 pcs

Operating conditions

Operating temperature range	-45 °C ~ +85 °C
Max system voltage	1500 V
Max series fuse rating	15 A
Max front load (ex: snow)	5400 Pa
Max back load (ex: wind)	2400 Pa

Certification

