

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**


Email: **contact@energypal.com**



**Solar Panel Guide
Specification Data Sheet**

**East Lux Energy Co., Ltd
EL325-345M-60H (5BB)
EL335M-60H**

Also available on the web at
EnergyPal.com/east-lux-energy-co-ltd-solar-panels/el335m-60h



EL325-345M-60H(5BB)

MONO CRYSTALLINE PERC SOLAR MODULE

East Lux
Power from East

KEY FEATURES



5 Busbar Solar Cell:

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Power Output:

With up to 345 Wp and 20.45 % efficiency, highest performing module of its kind on the market.



PID RESISTANT:

Limited power degradation caused by PID effect is guaranteed under strict testing condition (85 C /85%RH, 96hours) for mass production.



Low-light Performance:

Advanced glass and surface texturing allow for excellent performance in low-light environments.



Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability against extreme environmental conditions:

High salt mist and ammonia resistance certified by TUV NORD.



Temperature Coefficient:

Improved temperature coefficient decreases power loss during high temperatures.

Reliable Quality


- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant

Comprehensive Certificates

- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001:2008: Quality management systems
- ISO 14001:2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management system
- Environmental policy: The first solar company in China to complete intertek's carbon footprint evaluation program and receive green leaf mark verification for our products

LINEAR PERFORMANCE WARRANTY

12 Years Product Warranty 30 Years Linear Power Warranty

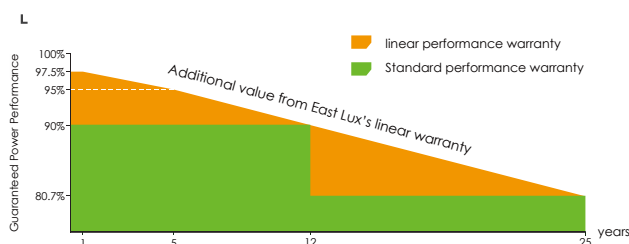


Specifications subject to technical change and tests. East Lux reserves the right of final interpretation.

SPECIFICATIONS

Module Type	EL325M-60H		EL330M-60H		EL335M-60H		EL340M-60H		EL345M-60H	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	325Wp	242Wp	330Wp	246Wp	335Wp	250Wp	340Wp	253Wp	345Wp	257Wp
Maximum Power Voltage (Vmp)	33.6V	31.6V	33.8V	31.8V	34.0V	32.0V	34.2V	32.2V	34.4V	32.4V
Maximum Power Current (Imp)	9.68A	7.66A	9.77A	7.74A	9.87A	7.82A	9.96A	7.86A	10.04A	7.94A
Open-circuit Voltage (Voc)	41.1V	38.0V	41.3V	38.2V	41.5V	38.4V	41.7V	38.6V	41.9V	38.8V
Short-circuit Current (Isc)	10.20A	8.54A	10.31A	8.65A	10.36A	8.74A	10.55A	8.86A	10.64A	8.97A
Module Efficiency STC (%)	19.26%		19.56%		19.85%		20.15%		20.45%	
Operating Temperature (°C)	-40°C~+85°C									
Maximum System Voltage	1000/1500VDC (IEC)									
Maximum Series Fuse Rating	20A									
Power Tolerance	0~+3%									
Temperature Coefficients of Pmax	-0.35%/C									
Temperature Coefficients of Voc	-0.29%/C									
Temperature Coefficients of Isc	0.048%/C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									


Engineering Drawings

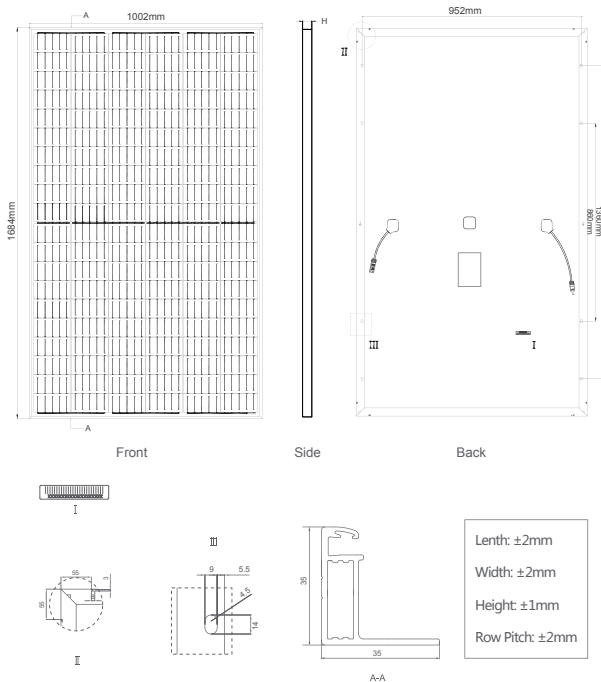

Packaging Configuration

31pcs/pallet, 62pcs/stack, 806pcs/40'HQ Container

Electrical Performance & Temperature Dependence

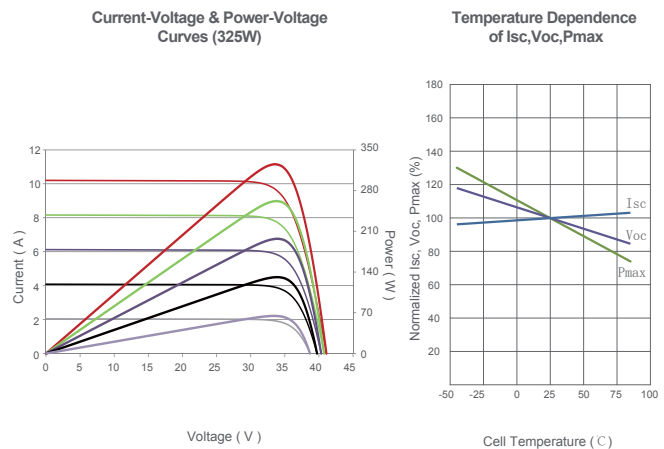

Mechanical Characteristics

Cell Type	Mono PERC 158.75×79.375mm
No. of cells	120 (6×20)
Dimensions	1684×1002×35mm (66.30×39.45×1.38 inch)
Weight	19.0 kg (41.9 lbs)
Front Glass	23.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Back Glass	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TUV 1×4.0mm ² (+) 290mm, (-) 145mm or Customized Length

*STC: Irradiance 1000W/m²



Cell Temperature 25°C



AM=1.5

NOCT: Irradiance 800W/m²



Ambient Temperature 20°C



AM=1.5



Wind Speed 1m/s

* Power measurement tolerance: ± 3%

Electrical data in this catalogue do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.