

**For a Free Quote:**

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**



**Solar Panel Guide  
Specification Data Sheet**

**East Lux Energy Co., Ltd  
EL380-400MS-72H(5BB)  
EL395MS-72H**

Also available on the web at  
[EnergyPal.com/east-lux-energy-co-ltd-solar-panels/el395ms-72h](http://EnergyPal.com/east-lux-energy-co-ltd-solar-panels/el395ms-72h)



# EL380-400MS-72H(5BB)

MONO CRYSTALLINE PERC SOLAR MODULE  
Half Cell

**East Lux**  
Power from East

## KEY FEATURES



### 5 Busbar Solar Cell:

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



### High Power Output:

With up to 400 Wp and 19.88 % efficiency, highest performing module of its kind on the market.



### PID RESISTANT:

Limited power degradation caused by PID effect is guaranteed under strict testing condition (85 C /85%RH, 96hours) for mass production.



### Low-light Performance:

Advanced glass and surface texturing allow for excellent performance in low-light environments.



### Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



### Durability against extreme environmental conditions:

High salt mist and ammonia resistance certified by TUV NORD.



### Temperature Coefficient:


Improved temperature coefficient decreases power loss during high temperatures.

## Reliable Quality

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant

## LINEAR PERFORMANCE WARRANTY

12 Years Product Warranty 25 Years Linear Power Warranty

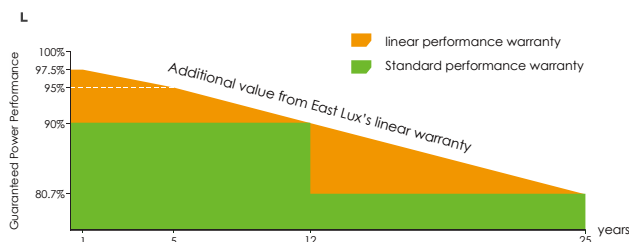

## Comprehensive Certificates

- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001:2008: Quality management systems
- ISO 14001:2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management system
- Environmental policy: The first solar company in China to complete intertek's carbon footprint evaluation program and receive green leaf mark verification for our products




Specifications subject to technical change and tests. East Lux reserves the right of final interpretation.

## SPECIFICATIONS

Module Type	EL380MS-72H		EL385MS-72H		EL390MS-72H		EL395MS-72H		EL400MS-72H	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	380Wp	286Wp	385Wp	290Wp	390Wp	294Wp	395Wp	298Wp	400Wp	302Wp
Maximum Power Voltage (Vmp)	40.5V	38.6V	40.8V	38.8V	41.1V	39.1V	41.4V	39.3V	41.7V	39.6V
Maximum Power Current (Imp)	9.39A	7.42A	9.44A	7.48A	9.49A	7.54A	9.55A	7.60A	9.60A	7.66A
Open-circuit Voltage (Voc)	48.9V	47.5V	49.1V	47.7V	49.3V	48.0V	49.5V	48.2V	49.8V	48.5V
Short-circuit Current (Isc)	9.75A	7.88A	9.92A	7.95A	10.12A	8.02A	10.23A	8.09A	10.36A	8.16A
Module Efficiency STC (%)	18.89%		19.14%		19.38%		19.63%		19.88%	
Operating Temperature (℃)					-40℃~+85℃					
Maximum System Voltage					1000VDC (IEC)					
Maximum Series Fuse Rating					20A					
Power Tolerance					0~+3%					
Temperature Coefficients of Pmax					-0.36%/℃					
Temperature Coefficients of Voc					-0.28%/℃					
Temperature Coefficients of Isc					0.048%/℃					
Nominal Operating Cell Temperature (NOCT)					45±2℃					


## Engineering Drawings

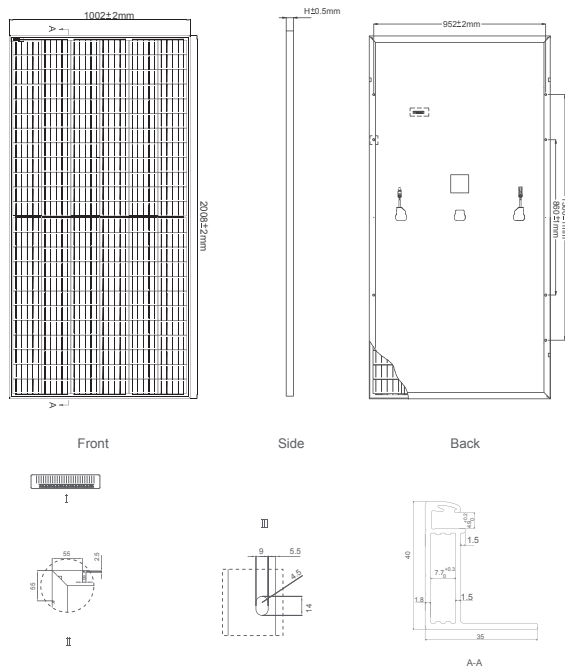

## Packaging Configuration

26pcs/pallet, 52pcs/stack, 572 pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

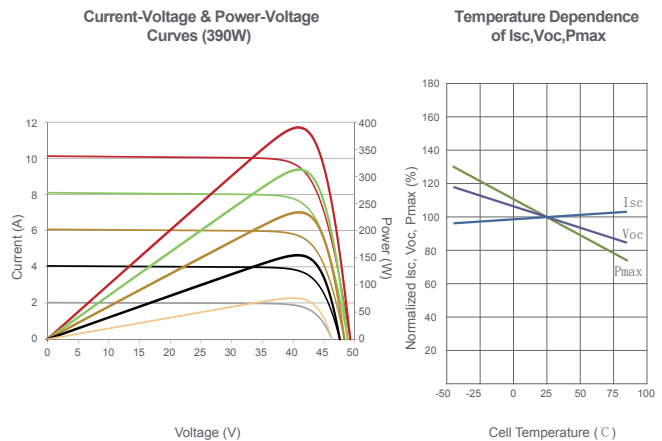

## Mechanical Characteristics

Cell Type	Mono PERC 158.75×158.75mm
No. of Half-cells	144 (6×24)
Dimensions	2008×1002×40mm (79.06×39.45×1.57 inch)
Weight	22.5 kg (49.6 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1x4.0mm <sup>2</sup> , anode 290mm, cathode 145mm or Customized Length

\*STC: Irradiance 1000W/m<sup>2</sup>



Cell Temperature 25°C



AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup>



Ambient Temperature 20°C



AM=1.5



Wind Speed 1m/s

\* Power measurement tolerance: ± 3%

Electrical data in this catalogue do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.