

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

EverExceed Industrial Co., Ltd

ESM245-156(72Cells)

ESM245-156(72Cells)

Also available on the web at

EnergyPal.com/everexceed-industrial-co-ltd-solar-panels/esm245-156-72cells

WE MAKE SOLAR ENERGY MORE EFFICIENT AND SIMPLE!

EverExceed[®]
power your applications

ESM245-156(60 Cells)

POLYCRYSTALLINE SOLAR MODULE



High module conversion efficiency, through superior manufacturing technology



Easy installation and handling for various applications



Entire module certified to withstand high wind loads (2400 Pa) and snow loads (5400 Pa)



ISO9001, OHSAS18001, ISO14001



An EverExceed high-power residential solar module is an aesthetic addition to most roofs

ENGINEERING EXCELLENCE

The perfect combination of high performance and design

ADVANCED AESTHETICS

Has an elegant appearance that blends beautifully with your home roof line

DURABLE

Provides long life and enhanced cell performance

HIGH PERFORMANCE

Uses advanced surface texturing to improve efficiency



EverExceed PV modules offer BTS-leading performance for a variety of applications

Power your application

When you choose EverExceed, you get more well-engineered products, you also get our proven reliability, outstanding customer service and the assurance of our 25-year limited warranty

ESM245-156(60 Cells)

245 Watt

Electrical Characteristics

| | |
|---------------------------|-------------------------|
| Type of Cell | Polycrystalline silicon |
| Cell Size(mm) | 156mm |
| Module Efficiency | 16.69% |
| Cell Configuration | 60(6x10) |
| Size of module (mm) | 1480x992x35mm |
| Weight per piece (Kg) | 15.0Kg |
| Maximum power (Wp) | 245W |
| Maximum power voltage (V) | 31.5V |
| Maximum power current (A) | 7.78A |
| Open circuit voltage (V) | 38.0V |
| Short circuit current (A) | 8.20A |
| Tolerance of Pmax | 0~+5W |


Standard Operating Conditions

| | |
|-------------------------------------|--------------------|
| Maximum system voltage (V) | 1000V |
| Temperature coefficients of Isc (%) | 0.053%/°C |
| Temperature coefficients of Voc (%) | -0.33%/°C |
| Temperature coefficients of Pm (%) | -0.42%/°C |
| NOCT(°C) | 45°C±2°C |
| Temperature range | -40°C to +85°C |
| Surface maximum load capacity | 60m/s (200kg/sq.m) |
| Series fuse rating | 15A |

Other Characteristics

| | |
|---------------------------------|--|
| Junction box type | Ip67 rated |
| Connectors and cables type | 4mm ² |
| Length of cables (mm) | 900mm |
| Frame (material, corners, etc.) | Anodized aluminum alloy |
| Glass | High transmissivity low-iron 3.2 mm toughened glass |
| FF (%) | ≥ 78.63% |

QUALIFICATIONS

| | |
|--|--------------------------|
|  | IEC 61215 IEC 61730 RoHS |
|--|--------------------------|



10 years material and workmanship guarantee

95% power output guarantee for 5 years
90% power output guarantee for 10 years
80% power output guarantee for 25 years

EverExceed will not accept responsibility for damage caused to other equipment



Contact EverExceed to receive our latest product information

5-year
95% power output

10-year
90% power output

25-year
80% power output

Characteristics (Module I-V Graph 245W)

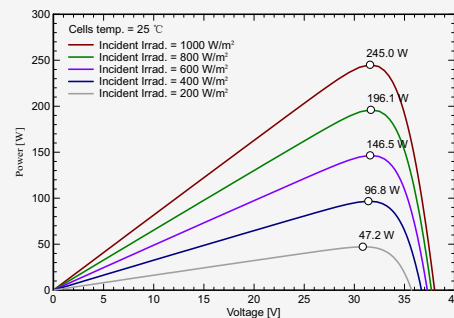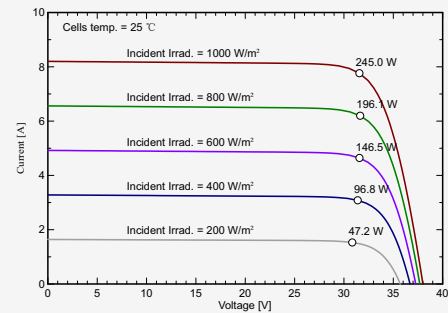

STC: Irradiance 1000W/m², Module temperature 25°C, AM1.5 spectrum.

Dimension

