

**For a Free Quote:**

Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)

Call: 1-800-990-3725

Email: [contact@energypal.com](mailto:contact@energypal.com)

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Full Solar Co., Ltd.**

**FX-100-130P**

**FX-120P**

Also available on the web at  
[EnergyPal.com/full-solar-co-ltd-solar-panels/fx-120p](http://EnergyPal.com/full-solar-co-ltd-solar-panels/fx-120p)

## Poly-Crystalline Solar PV Module 36 Cells Series



### Performance

- ♦ Water resistant junction box with bybass diode and high strength polymer sheet on module's rear ensures module is sealed from moisture and mechanical damage
- ♦ High transmissivity low-iron toughened glass
- ♦ Excellent week light performance
- ♦ Unique drainage hole design and aluminum frame

### Quality and Reliability

- ♦ Superior reliability with guaranteed +/-3% power output tolerance
- ♦ 10 years warranty on materials and workmanship,
- ♦ 25 years linear power warranty, 97% in the first year, 91% in 10<sup>th</sup> year, and ending with 80% in 25<sup>th</sup> year
- ♦ Cells are individually tested, characterized and modulated prior to interconnection
- ♦ Test and produce standard: IEC61215, IEC61730, ISO 9001:2008, ISO14001:2004, OHSAS18001:2007, TIS18001:2011, TIS1843:2553, TIS2580:2555



### Electrical Characteristics

Specification	FX-100P	FX-105P	FX-110P	FX-115P	FX-120P	FX-125P	FX-130P
Rating power at STC (Wp)	100W	105W	110W	115W	120W	125W	130W
Open circuit voltage (Voc)	21.7V	22.0V	22.2V	22.3V	22.4V	22.6V	22.7V
Short circuit current (Isc)	7.02A	7.11A	7.19A	7.28A	7.36A	7.45A	7.54A
Rated voltage (Vm)	17.2V	17.4V	17.4V	17.5V	17.6V	17.8V	17.9V
Rated current (Im)	6.57A	6.67A	6.78A	6.88A	6.99A	7.09A	7.19A
Module efficiency (%)	11.94%	12.54%	13.13%	13.73%	14.33%	14.93%	15.52%
Power tolerance	±3%						
Temperature coefficient of Pm	-0.47%/K						
Temperature coefficient of Isc	+0.038%/K						
Temperature coefficient of Voc	-0.34%/K						
Maximum system voltage	DC600v (UL) / DC1000V (IEC)						

All technical data at STC: AM1.5; 1000W/m<sup>2</sup>; 25°C

### Mechanical Characteristics

Solar Cell	Polycrystalline
No. of cells	36 (4X9)
Nominal Operating Cell Temperature (NOCT)	46 ± 2 °C
Operation temperature	From -40 to + 85°C
Typical Application	12V DC
Max series fuse rating	10A
Max wind resistance	2400Pa
Surface max. load capacity	5400Pa
Weight	9.5kg
Dimension	1250X670X35MM

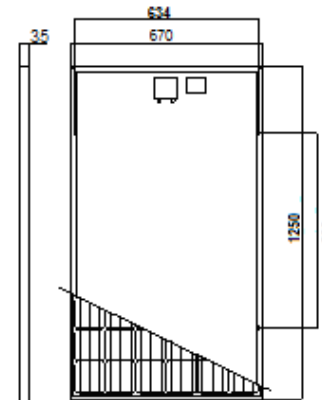

1. Tempered glass
2. EVA
3. Cells
4. EVA
5. Back sheet