

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Gi-Power New Energy Co., Ltd.

GP-085~075M-36

GP-080M-36

Also available on the web at
EnergyPal.com/gi-power-new-energy-co-ltd-solar-panels/gp-080m-36


Monocrystalline Module Models

GP-085M-36 GP-080M-36 GP-075M-36

Electrical Specifications

*STC : Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

Model type	GP-085M-36	GP-080M-36	GP-075M-36
Peak power (Pmax)	85W	80W	75W
Cell Efficiency	19.76%	19.16%	18.00%
Maximum power voltage	19.7V	19.1V	18.3V
Maximum power current	4.32A	4.18A	4.10A
Open circuit voltage (Voc)	22.7V	22.6V	22.1V
Short circuit current (Isc)	4.58A	4.44A	4.39A
Power Tolerance	±3%		
Maximum system voltage	1000V		
Series fuse rating (A)	6		
Number of bypass diode	3		

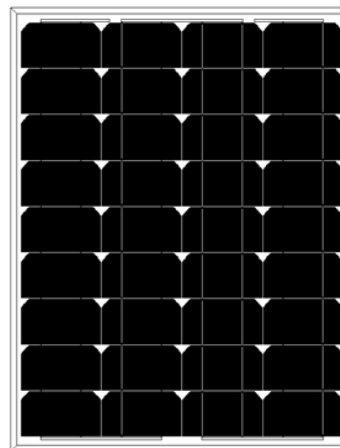

Temperature Coefficients

Current Temperature Coefficient $\alpha(I_{sc})$	0.03%/°C
Voltage Temperature Coefficient $\beta(V_{oc})$	- 0.32%/°C
Power Temperature Coefficient	-0.42%/°C
Nominal Temperature Of Cells(NOTC)	46±2°C
Application Temperature Range	-40~+85°C

Mechanical Characteristics

Dimensions:	770 x 670 x 25mm (30.31x26.38x0.98 inch)
Weight:	5.4kg (11.99 lbs)
Solar Cells:	36 cells in series(4x 9)
Construction:	High-transmission low-iron tempered glass , EVA, TPT/TPE
Frame:	Anodized aluminum is mainly for improving corrosion resistance. Color: silver

Output(Optional)

Cable	LAPP(4 mm2)
Lengths	900mm(-) and 900mm(+)
Connector	MC Plug Type IV

Module Warranty:


25-year limited warranty of 80% power output;

10-year limited warranty of 90% power output;

5-year limited warranty of materials and workmanship.


Note: This publication summarizes product warranty and Specifications which are subject to change without notice

Product photos are for reference only, on behalf of actual product

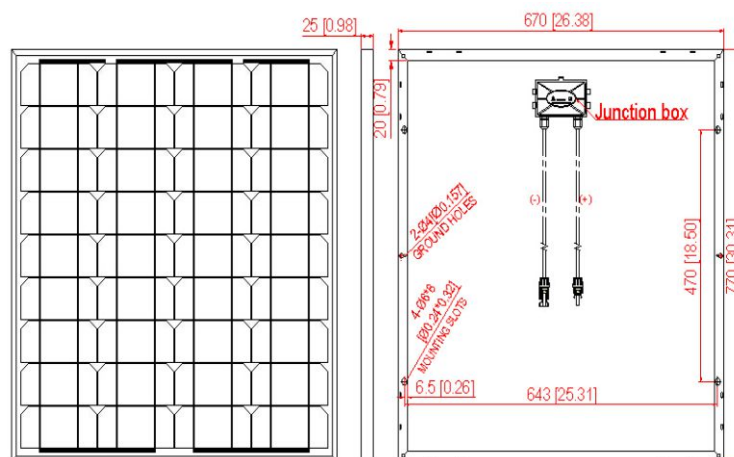

Module Diagram

U-I-CHARACTERISTIC CURVE AT 25 °C

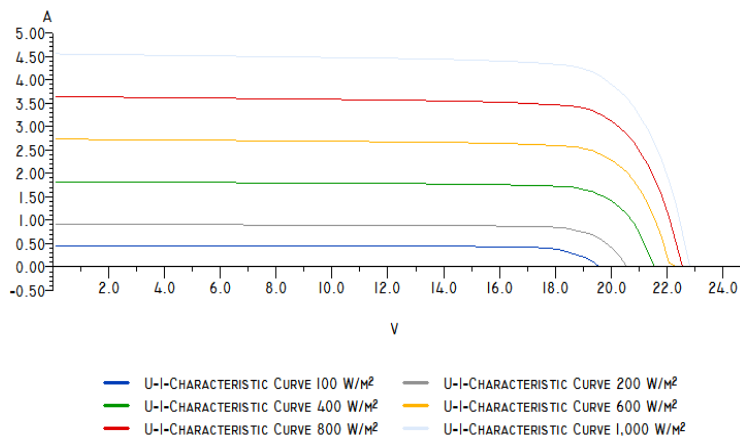

Electric Performance