

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**HHV Solar Technologies Pvt. Ltd.
Multi 36 Cell 160 - 170 W
HST36F160P**

Also available on the web at
EnergyPal.com/hhv-solar-technologies-pvt-ltd-solar-panels/hst36f160p

36 CELL MODULE

POLY-CRYSTALLINE

HST36FXXXP

ELECTRICAL CHARACTERISTICS

Rated power	Pm	W	160	165	170
Open circuit voltage	Voc	V	22.95	23.06	23.16
Maximum power voltage	Vmp	V	18.50	18.70	18.85
Short circuit current	Isc	A	9.14	9.32	9.68
Maximum power current	Imp	A	8.65	8.83	9.05
Module efficiency	η	%	16.13 - 16.63	16.63-17.13	17.14-17.64
Power tolerance	W			-0 / +4.99	

CONSTRUCTION



Cell / Matrix	36; Poly Crystalline; 9 x 4
Dimension	1487 x 667 x 35mm
Weight	11 kg
Glass	ARC; Low Iron; Tempered; High Light Transmission; 3.2mm Thk.
Junction Box	IP68; Potted
Cable	4mm ² ; 1000±50mm length
Connector	TL - CABLE01S
Diode	Schottky Bypass Diodes; 3 Nos
Frame	18μ Anodized aluminium alloy; twin wall profile
Locking	Corner key type

MAXIMUM RATINGS

System Voltage	1500 VDC (IEC) / 1000 VDC (BIS)
Fuse Rating	15 A
Application Class	Class A Protection Class II
Snow Load	5400 Pa
Wind Load	2400 Pa


TEMPERATURE RATINGS

NOCT	44°C (±2°C)
Tc of Voc	-0.27 %/°C
Tc of Isc	+0.04 %/°C
Tc of Pm	-0.35 %/°C
Operating range	-40°C to +85°C

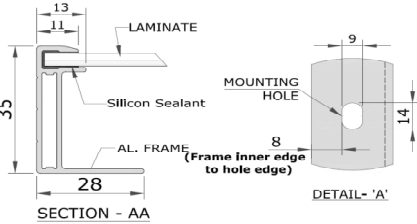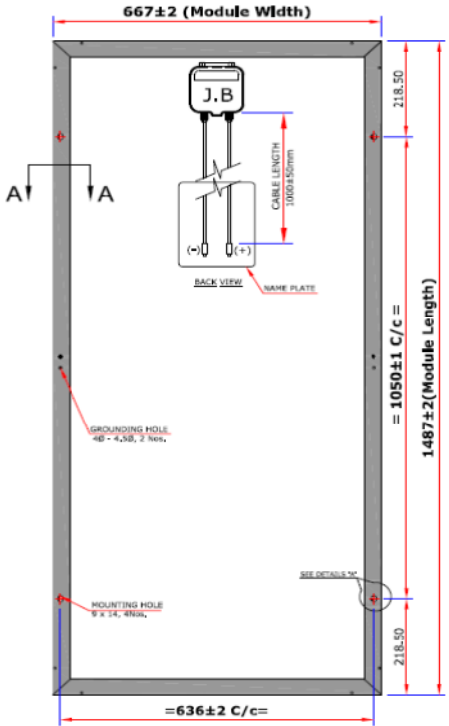

WARRANTY


Product	10 Years
Performance	90% of rated power for 12 Yr 81% of rated power for 25 Yr

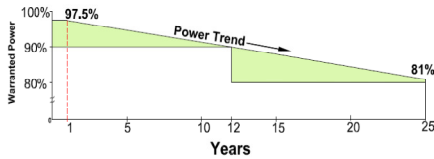

Notes :

SALIENT FEATURES

- BIS Certified (IS 14286 & IS/IEC 61730-1 & 2)
- Salt Mist Resistance; Certified for Severity 6
- 1500VDC (IEC) / 1000VDC (IEC,BIS)
- PID resistant (3 times of IEC Criteria)
- Micro-crack free
- Multi stage 100% in-line EL passed
- Higher energy yield on field performance
- More than 25 in-house quality checks
- Positive tolerance up to +5W
- Fire Class-“C”
- Best in class material for true 25 years life
- Extended power warranty
- IEC 61215, 61730, 61701, 62804

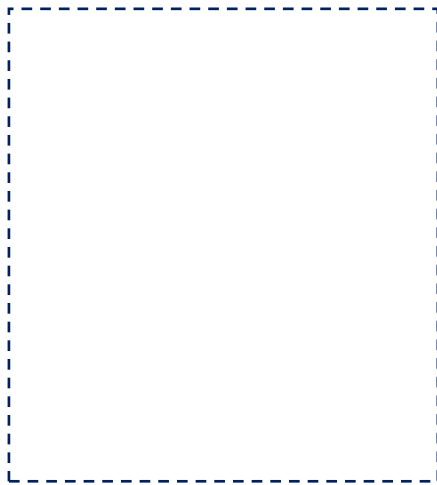

Note: • Design and Specifications are subject to change without notice. • Electrical Parameters measured at STC only (at 25°C, 1000W/M²). • Please refer to installation manual and strictly adhere to instruction / guidelines to qualify for warranty terms.

