

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**JJ PV Solar Pvt. Ltd.**

**JP36C050**

**JP36C050**

Also available on the web at  
[EnergyPal.com/jj-pv-solar-pvt-ltd-solar-panels/jp36c050](http://EnergyPal.com/jj-pv-solar-pvt-ltd-solar-panels/jp36c050)

## POLY CRYSTALLINE MODULES

**JJ PV Solar introduces all new line of high performance modules in wide applications**



### KEY FEATURES

- Our solar Modules offers high conversion efficiency
- Our high performing modules have an industry low tolerance of  $\pm 3\%$
- Can withstand high wind pressure ,snow load & extreme temperature

### QUALITY & SAFETY

- Application Class A, Safety Class II
- ISO 9001:2008(Quality Management system) and ISO 14001 certified company
- Certified for IEC 61215 and IEC 61730 Safety Standard II and 61701 by TUV Intercert

### APPLICATIONS

- Off-grid residential roof-tops & other applications
- On-grid commercial/Industrial roof-tops
- Easy Instalation and Handling for Various Applications

### CHARACTERISTICS

- Type of Cell : Multi Crystalline Cells
- Front Face : Tempered & Textured Glass ( Low iron )
- Frame : Anodized Aluminium, Corner Incert, Screwless
- Junction Box : TUV & UL Approved, IP 65 Protected, With Bypass Diodes
- Warranty : 5 Years Workmanship and 25 Years Linear Power Output



**JJ PV Solar Pvt. Ltd.**

Nr. Vikas Stove, Bh. Hargange Waybridge,  
Vill. Veraval ( Shapar ), Rajkot - 360 024. Gujarat, India.

Tel : + 91 2827 254474 Fax : + 91 2827 254476

e-mail : sales@jjpvsolar.com Web : www.jjpvsolar.com



## TECHNICAL SPECIFICATIONS


### Electrical Parameters

Model	JP36C050
Rated Power(Pmax) watt	50
Volt at Max. power(Vmp in volt)	17
Open circuit voltage(Voc in volt)	21
Current at Max. Power(Imp in Amp)	2.95
Short circuit current(Isc in Amp)	3.23
Fill factor(FF)	>70
Module efficiency (%)	12~14
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C, & AM :1.5G spectrum
Temp.coeff. Of Pmax(%/K)	-0.44
Temp.coeff. Of Voltage(mV/K)	-2.13
Temp.coeff. Of current(mA/K)	4.46
Max.system voltage (Volt)	600
NOCT (Nominal operating Cell temp in °c)	47.0±2
Tolarence of rated power (%)	± 3

### Mechanical Parameters


Family	No. of Cells	Cells	Glass	Alu. Frame	Junction Box	Cable & Connector	Dimension	Weight
JP36C	9x4	Poly	High transmission, low iron, tempered and textured glass, 3.2mm	Silver Anodized Aluminum Alloy	3 Rail, 2 Diodes	N/A	575 X 661 X 22 (mm) or 22.63 X 26.02 X 1.37 (inch)	4.9 K.G

### Mounting Dimensions

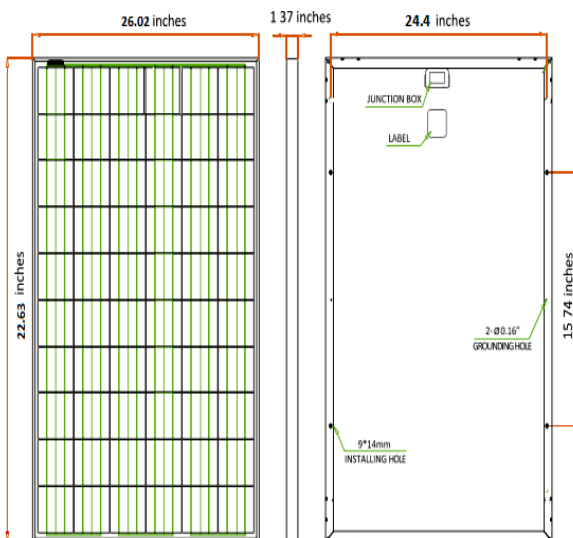

Drawing Only for Reference

### I-V Curve with various irradiance level

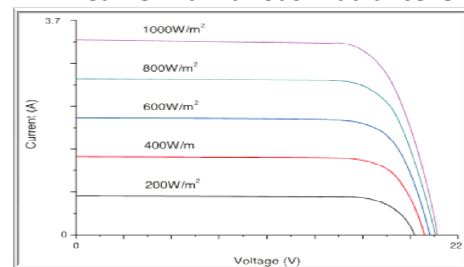

### Dependence of Temperature

