

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Jetion Solar (China) Co., Ltd.

JT PAg 330-345W


JT335PAg

Also available on the web at
EnergyPal.com/jetion-solar-china-co-ltd-solar-panels/jt335pag

JT PAg 330-345W

High Efficiency Polycrystalline Solar Module

72 Cells / 1500V DC / 17.8% Maximum Efficiency

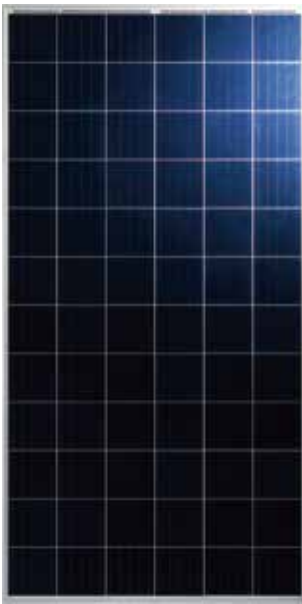

KEY FEATURES



High module conversion efficiency

Maximize limited space with high efficiency poly cells



Highly reliable due to stringent quality control

100% EL double inspection
In-house testing goes well beyond certification requirements



Certified to withstand the most challenging environment

2400 Pa wind load • 5400 Pa snow load • 25 mm hail stones at 82 km/h salt mist, ammonia corrosion and sand blowing testing



High system voltage Compatible

Maximum 1500VDC system voltage saves total system cost



Temperature Coefficient

Improved temperature coefficient decreases power loss during high temperatures



IP68 junction box

Highest waterproof level for long term weather endurance

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, UL 1703, IEC 61701, IEC 62716
- ISO 9001: 2008: ISO Quality Management System
- ISO 14001: 2004: ISO Environment Mangement System
- OHSAS 18001: 2007: Occupational Health and Safety

JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion has cumulatively more than 5 GW module shipment and 1 GW global EPC track records.

Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443
Tel: +86 (510) 8668 7300
E-mail: marketing@jetion.com.cn
Web: www.jetion.com.cn

WARRANTY




12 years
Product
Warranty




25 years
Performance
Warranty

Insured by
Munich RE

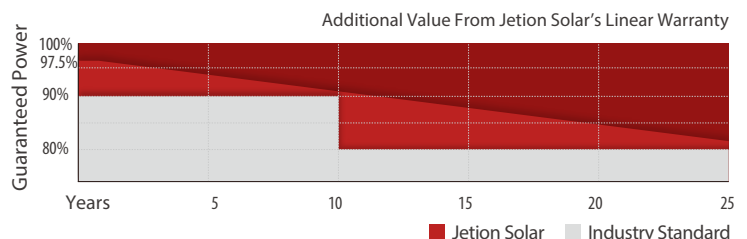


IV CURVES


IV Curves of JT 340 PAg at different irradiances

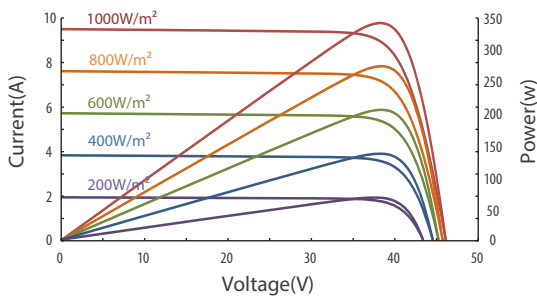

IV Curves of JT 340 PAg at different Temp

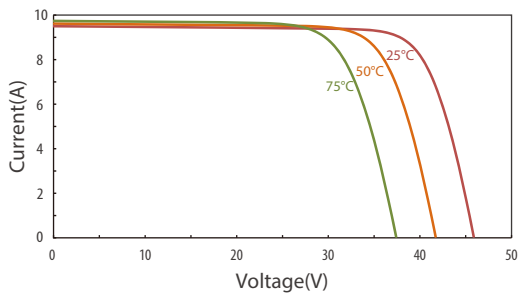

DIMENSION

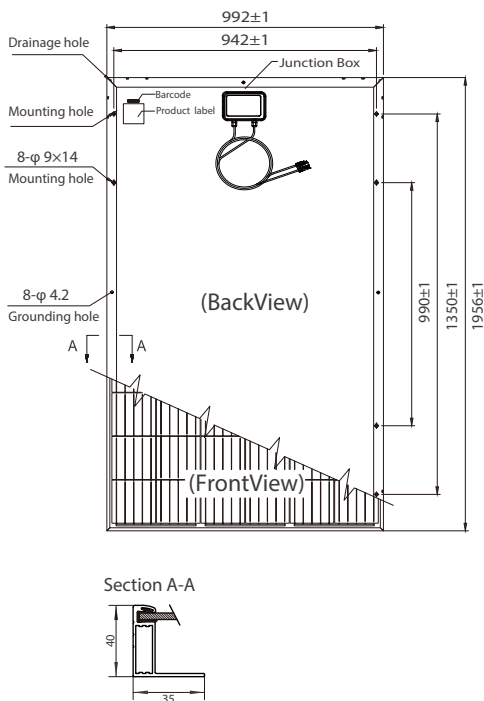

Remarks

ELECTRICAL DATA *STC

TYPE (Tolerance: 0 - +5W)	JT330PAg	JT335PAg	JT340PAg	JT345PAg
Maximum Power Pmax (W)	330W	335W	340W	345W
Maximum Power Voltage Vmp (V)	37.3	37.5	37.7	37.9
Maximum Power Current Imp (A)	8.89	8.97	9.06	9.13
Open Circuit Voltage Voc (V)	45.7	45.9	46.1	46.3
Short Circuit Current Isc (A)	9.35	9.42	9.50	9.57
Module Efficiency (%)	17.0%	17.3%	17.5%	17.8%

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

ELECTRICAL DATA *NMOT

Maximum Power Pmax (W)	244.97	248.82	252.70	256.61
Maximum Power Voltage Vmp (V)	34.6	34.8	35.0	35.2
Maximum Power Current Imp (A)	7.08	7.15	7.22	7.29
Open Circuit Voltage Voc (V)	42.4	42.6	42.8	43.0
Short Circuit Current Isc (A)	7.49	7.55	7.62	7.69

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.05%/°C
Temperature Coefficient of Voc (βVoc)	-0.31%/°C
Temperature Coefficient of Pmax (γPmp)	-0.41%/°C
Normal Module Operating Temperature (NMOT)	43°C±2°C

MAXIMUM RATINGS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	15A
Maximum Test Load, Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥ 100MΩ

MECHANICAL DATA

Solar Cell Type	Poly 157×157 mm(6 inches)
Number of Cells	72 (6×12)
Module Dimensions	1956×992×40 mm(77×39.1×1.6 inches)
Weight	22 kg(48.5 lb)
Front Cover	3.2 mm (0.13 inches), high transmission, AR coated tempered glass
Backsheet	White composite film
Frame	Silver, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0 mm ² solar cable, 1000 mm(39.4 inches)/customizable
Number of diodes	3
Connector	MC4 or MC4 compatible

PACKAGING CONFIGURATION

Module per pallet	27 pieces
Module per 40'HQ container	648 pieces

Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.

