

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**LG Electronics, Inc.  
LG NeON® R 365-380  
LG365Q1C-V5**

Also available on the web at  
[EnergyPal.com/lg-electronics-inc-solar-panels/lg365q1c-v5](http://EnergyPal.com/lg-electronics-inc-solar-panels/lg365q1c-v5)


# LG NeON<sup>®</sup>R

60

## 380W | 375W | 370W | 365W

LG NeON<sup>®</sup>R is powerful solar module that provides world-class performance. A new cell structure that eliminates electrodes on the front maximizes the utilization of light and enhances reliability.

LG NeON<sup>®</sup>R is a result of LG's efforts to increase customer's values beyond efficiency. LG NeON<sup>®</sup>R features enhanced durability, performance under real-world conditions, an enhanced warranty and aesthetic design suitable for roofs.

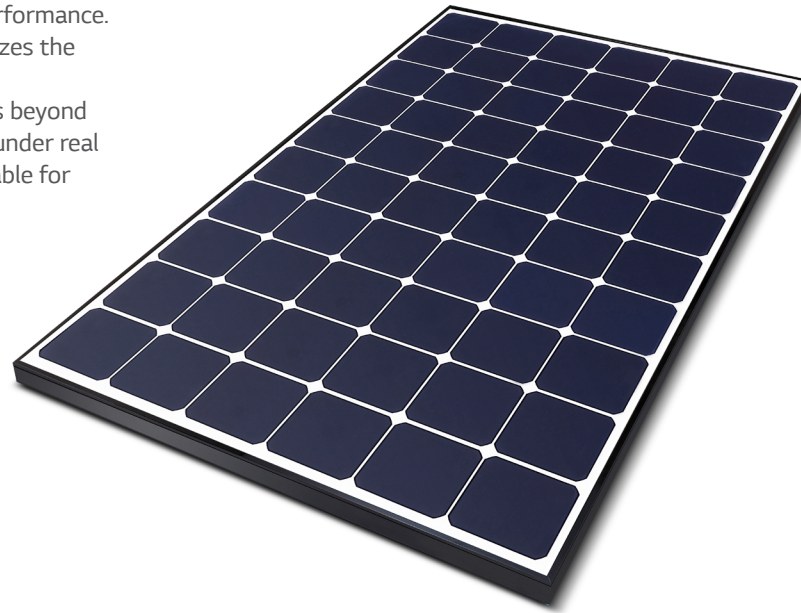

## Feature



### Aesthetic Roof

LG NeON<sup>®</sup>R has been designed with aesthetics in mind: the lack of any electrodes on the front creates an improved, modern aesthetic.



### Extended Product Warranty

LG has extended the product warranty of the LG NeON<sup>®</sup>R to 25 years which is top level of the industry.



### Enhanced Performance Warranty

LG NeON<sup>®</sup>R has an enhanced performance warranty. After 25 years, LG NeON<sup>®</sup>R is guaranteed to perform at minimum 90.8% of initial performance.



### More generation per square meter

The LG NeON<sup>®</sup>R has been designed to significantly enhance its output, making it efficient even in limited space.

## About LG Electronics

LG Electronics is a global big player, committed to expanding its operations with the solar market. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX<sup>®</sup> series to the market, which is now available in 32 countries. The NeON<sup>®</sup> (previous MonoX<sup>®</sup> NeON), NeON<sup>®</sup>2, NeON<sup>®</sup>2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG Solar's lead, innovation and commitment to the industry.



# LG NeON<sup>®</sup>R

LG380Q1C-V5 | LG375Q1C-V5 | LG370Q1C-V5 | LG365Q1C-V5

## General Data

Cell Properties(Material / Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	60 Cells (6 x 10)
Module Dimensions(L x W x H)	1,700mm x 1,016mm x 40mm
Weight	17.5 kg
Glass(Thickness / Material)	2.8mm / Tempered Glass with AR Coating
Backsheet(Color)	White
Frame(Material)	Anodized Aluminium
Junction Box(Protection Degree)	IP68 with 3 Bypass Diodes
Cables(Length)	1,000mm x 2EA
Connector(Type / Maker)	MC4 / MC

## Certifications and Warranty

Certifications	IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016
	UL 1703
	ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6
Ammonia Corrosion Test	IEC 62716:2013
Module Fire Performance	Type 1 (UL 1703)
Fire Rating	Class C (UL 790, ULC/ORD C 1703)
Product Warranty	25 Years
Output Warranty of Pmax	Linear Warranty*

\* 1) First year : 98%, 2) After 1st year : 0.3% annual degradation 3) 90.8% for 25years  
 \*\* LG380Q1C-V5 model has UL 1703 certification only

## Temperature Characteristics


NMOT*	[ °C ]	44 ± 3
Pmax	[%/°C]	-0.30
Voc	[%/°C]	-0.24
Isc	[%/°C]	0.037

\* NMOT(Nominal Module Operating Temperature) : Irradiance 800 W/m<sup>2</sup>, Ambient temperature 20 °C, Wind speed 1 m/s, Spectrum AM 1.5

## Electrical Properties (NMOT)

Model		LG380Q1C-V5	LG375Q1C-V5	LG370Q1C-V5	LG365Q1C-V5
Maximum Power (Pmax)	[W]	286	282	279	275
MPP Voltage (Vmpp)	[V]	37.3	37.1	36.9	36.6
MPP Current (Impp)	[A]	7.67	7.61	7.55	7.51
Open Circuit Voltage (Voc)	[V]	40.3	40.3	40.3	40.2
Short Circuit Current (Isc)	[A]	8.73	8.72	8.71	8.70

## I-V Curves

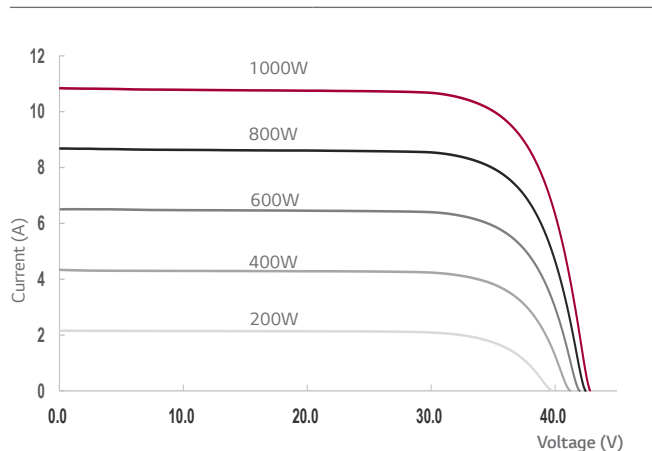

## Electrical Properties (STC\*)

Model		LG380Q1C-V5	LG375Q1C-V5	LG370Q1C-V5	LG365Q1C-V5
Maximum Power (Pmax)	[W]	380	375	370	365
MPP Voltage (Vmpp)	[V]	37.4	37.2	37.0	36.7
MPP Current (Impp)	[A]	10.17	10.09	10.01	9.95
Open Circuit Voltage (Voc, ±5%)	[V]	42.9	42.8	42.8	42.8
Short Circuit Current (Isc, ±5%)	[A]	10.84	10.83	10.82	10.80
Module Efficiency	[%]	22.0	21.7	21.4	21.1
Power Tolerance	[%]	0 ~ +3			

\* STC (Standard Test Condition): Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25 °C, AM 1.5,  
 \*\* Measure Tolerance : ± 3%

## Operating Conditions

Operating Temperature	[°C]	-40 ~ +90
Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load(Front)	[Pa / psf]	5,400 / 113
Mechanical Test Load(Rear)	[Pa / psf]	4,000 / 83.5

\*\* Mechanical Test Load 5,400Pa / 4,000Pa based on IEC 61215-2 : 2016  
 (Test Load = Design Load x Safety Factor(1.5))

## Packaging Configuration

Number of Modules Per Pallet	[EA]	25
Number of Modules Per 40ft HQ Container	[EA]	650
Packaging Box Dimensions (L x W x H)	[mm]	1,750 x 1,120 x 1,221
Packaging Box Gross Weight	[kg]	473

## Dimensions (mm / inch)

