

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Shandong Linuo Photovoltaic Hi-Tech Co., Ltd.

LN300(36)P-4 (310-325W)

LN300(36)P-4 320W

Also available on the web at
EnergyPal.com/shandong-linuo-photovoltaic-hi-tech-co-ltd-solar-panels/ln300-36-p-4-320w






LINUO POWER

SOLAR MODULES

Shandong Linuo Photovoltaic Hi-tech Co., Ltd.
 Add: No. 30766 East Jingshi Road, Jinan 250103, China.
 Tel: +86-531-88729696 / 88729106 / 88729770
 E-mail: pv@linuo.com
 Web: www.linuopower.com

LN300(36)P-4 (310-325W)

Poly / 4 Busbar / 72pcs

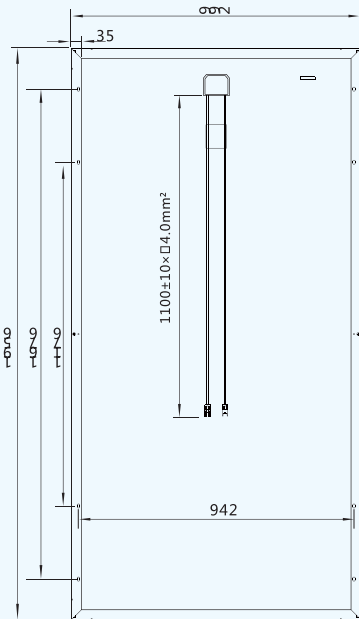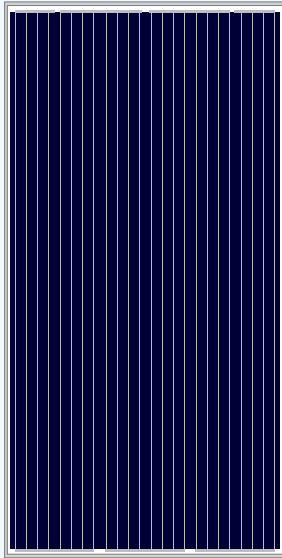


Key Features

- Power output : Positive tolerance of up to 5W
- 100%EL 2 times-inspection ensures modules are defect free
- 25 year irrevocable warranty insurance-Solarsafe
- Anti-reflective and self-cleaning surface reduces power loss from dirt and dust
- Certified to withstand increased snow loads of up to 5400Pa and wind loads of up to 2400Pa
- High performance and power output in low solar irradiation
- High salt and ammonia resistance certified by TUV Nord
- Top-Ranking in STS Long-term Test

Comprehensive Certificates

- IEC61215, IEC61730, UL1703,
- TUV, UL, PV Cycle, JET, INMETRO, CEC, MCS, CE, IEC
- ISO9001:2008
- ISO14001:2004
- OHSAS 18001:1999

Superior Warranty

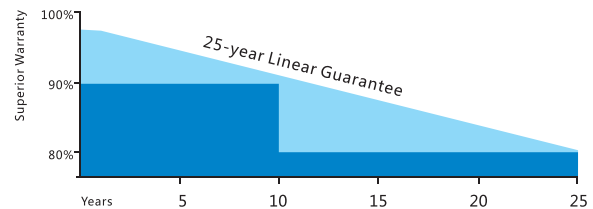

25-year Linear Power Output Warranty

In the first year of warranty, the peak power of poly-crystalline module should be no less than 97.5% of the rated power (Pmax.) and 96.5% for mono-crystalline module. At the end of the 25th year, power of modules should be at least 80% of rated power. The annual decline in performance is 0.70% maximum for poly-crystalline modules and 0.68% for mono-crystalline modules.

LINUO POWER

SOLAR MODULES

Shandong Linuo Photovoltaic Hi-tech Co., Ltd.
 Add: No. 30766 East Jingshi Road, Jinan 250103, China.
 Tel: +86-531-88729696 / 88729106 / 88729770
 E-mail: pv@linuo.com
 Web: www.linuopower.com

LN300(36)P-4 (310-325W)

Poly / 4 Busbar / 72pcs

Electrical Parameters@STC

Pmax (W)	Umpp (V)	Imp (A)	Uoc (V)	Isc (A)	FF	Module Efficiency	Max System Voltage	Max Series Fuse
310	37.13	8.35	44.99	8.97	76.83%	15.98%	1000V	15A
315	37.37	8.43	45.04	9.08	77.03%	16.23%	1000V	15A
320	37.52	8.53	45.17	9.16	77.35%	16.49%	1000V	15A
325	37.75	8.61	45.30	9.26	77.48%	16.75%	1000V	15A

Temperature Coefficient

Temperature Cycling Range : -40°C ~ +85°C
 Norminal Operating Cell Temperature : 46±2 °C
 Temperature Coefficient of Isc : 0.044%/°C
 Temperature Coefficient of Voc : -0.317%/°C
 Temperature Coefficient of Pmax : -0.423%/°C

Mechanical Data

Module Dimension : 1956×992×40mm
 Weight : 23.5kg
 Snow/Wind Load : 5400/2400 Pa
 Number of Cells : 72pcs
 Thickness of Glass : 4.0mm
 Junction Box: IP67, 3 Diodes
 Connector: MC4 Compatible, IP67



Guarantee

10-year warranty on materials & workmanship
 25-year linear power output warranty

Packaging Configuration

Modules Per Pallet: 27pcs
 Modules Per 40' HQ : 594pcs

310W Poly Module I-V Curve

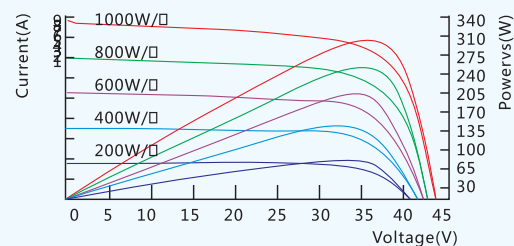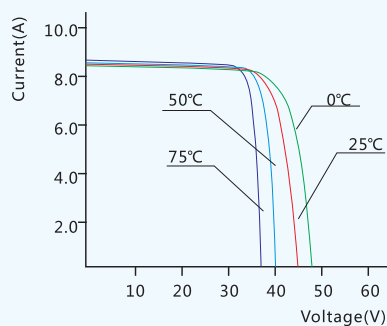

STC: Irradiance 1000W/m²
 NOCT: Irradiance 800W/m²

Temperature 25°C
 Temperature 20°C

AM=1.5
 Wind Speed 1m/s



Specifications subject to technical changes and tests, Linuo Power reserves the right of final interpretation

To create value to customers