

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Lina Energy Solutions

LS1 260-280W

LS1-270W

Also available on the web at
EnergyPal.com/lina-energy-solutions-solar-panels/ls1-270w




MONOCrystalline Solar Panel

liNa Solar Panels - Bulgarian Made



Physical Characteristics

Cells per Module	60 Cells (6x10)
Cell Type	Multi-crystalline Silicon
Module Dimension (L x W x H)	1650x990x38 (mm)
Module Weight	18.5Kg
Frame	Anodized Aluminum (Black frame available upon request)
Front Glass	3.2mm Tempered Glass
Junction Box	IP66 / IP65, 4mm ²
Cable Length(+/-)	1000mm

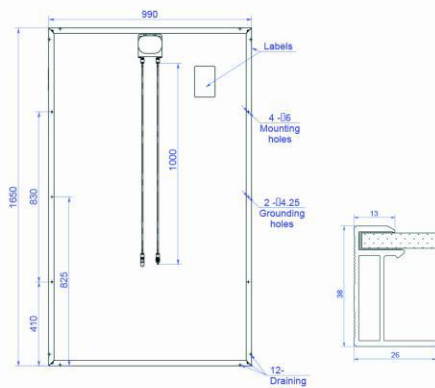

Electrical Characteristics

Item	Unit	LS1-260W	LS1-365W	LS1-270W	LS-275W	LS1-280W
Max. Power (Pmax)	W	260	265	270	275	280
Open circuit voltage (Voc)	V	38,28	38,40	38,6	38,8	39,1
Short circuit current (Isc)	A	8,7	8,73	8,95	9,15	9,31
Max. Power voltage (Vmp)	V	30,99	31,25	31,3	31,50	31,68
Max. Power current (Imp)	A	8,39	8,48	8,63	8,73	8,84
Module efficiency	%	16,22	16,34	16,53	16,84	17,14
Power Tolerance	W	0~+4,99				

*STC (Standard Test Condition): 1000W/m², AM 1.5, 25° C

Permissible operating conditions

Temperature range	-40 to +85 °C
Maximum system voltage	1,000V DC(IEC), 600V DC(UL)
Maximum surface load cap	5,400Pa
Maximum hailstone impact (diameter / velocity)	25mm / 23m/s

Thermal Characteristics

Rating	Unit	Value	
NOCT	°C	45,3 ±2	
Temperature coefficient	Isc	%/°C	+ 0,05
	Voc	%/°C	- 0,30
	P _{MAX}	%/°C	- 0,41

*NOCT (Nominal Operating Cell Temperature): 800W/m², 20° C, wind speed 1m/s



Packing Specifications

Packing box dimension (L x W x H)	1670x800x1150 (mm)
Number of modules per pallet	20

WARRANTY

- 10 YEARS Manufacturing warranty
- 10 YEARS 90% Power Output warranty
- 25 YEARS 80% Power Output warranty

I-V CURVES

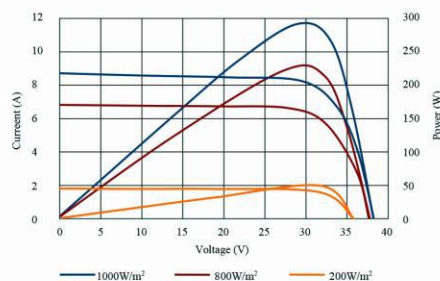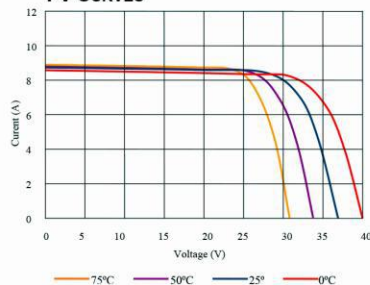

QUALIFICATIONS AND CERTIFICATES

