

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**Mysolar USA
P144 Poly 335-355W
MS335P-H**

Also available on the web at
EnergyPal.com/mysolar-usa-solar-panels/ms335p-h

Mysolar

STAR HC P144

HALF CELL
POLY MODULE
335-355W

POSITIVE TOLERANCE 0~+6W
POLY 144 5BB HALF CELL



Window Cleaning Robot
Mamibot W120-T


Robot Vacuum Cleaner
Mamibot Ysiam EXVAC6805

New Energy, Smart Living

WHY MYSOLAR?



5BB Solar Cells
Mysolar panels have 5BB cells that can reduce current heat loss of the cells and increase the current collection ability.



Strong and Safe
Mysolar panels are certified to withstand 2400 Pa negative load of wind and 5400 Pa positive load of snow.



1500V System Voltage
Mysolar panels are of 1500V system voltage design compatible to 1000V/1500V and reduces BoS cost greatly.



PID-Resistant
Mysolar panels are PID-resistant which were tested to the industry's most rigorous durability standards in accordance to IEC 62804.



Better Low Light Output
Mysolar uses the best solar glass, cells, and assembling technology to guarantee good performance in cloudy days or low light conditions.




Salt-resistant & Ammonia-resistant
Mysolar solar panels are salt mist and ammonia resistance certified.



Positive Tolerance
Mysolar guarantees that all solar modules manufactured by Mysolar have 0~6W positive tolerance.




Confident Warranty
Mysolar offers 12 years limited product warranty and 25 years performance warranty for all the solar modules.



Higher Output
With multi-busbar (5BB) cells, and 1500V system voltage, super solar glass, Mysolar panels have higher output than its competitors'.




High Reliability
Mysolar has complete testing facilities for tests of UV, TC, HF, EL, etc tests. 100% of Mysolar panels were tested & minimum twice EL tests guaranteed.

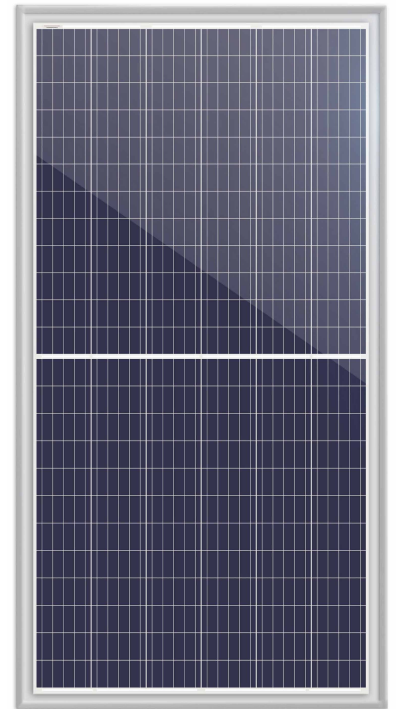

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty · 25 Year Linear Power Warranty

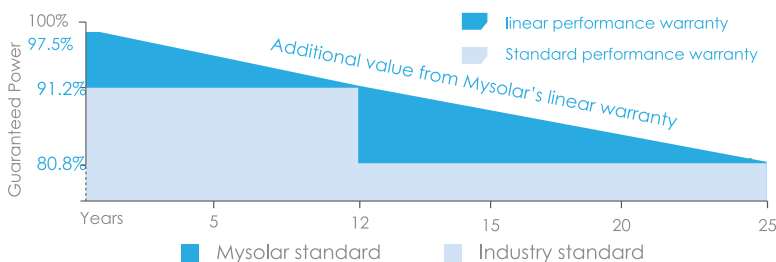

- ISO9001:2015 Quality management systems
- ISO14001: 2015 Quality management systems
- OHSAS18001: 2018 Occupational health and safety management systems
- IEC61215, IEC61730, UL1703 certified product



SPECIFICATIONS

Module Type	MS335P-H	MS340P-H	MS345P-H	MS350P-H	MS355P-H
	STC	STC	STC	STC	STC
Maximum Power (Pmax)	335Wp	340Wp	345Wp	350Wp	355Wp
Maximum Power Voltage (Vmp)	38.60V	38.70V	38.80V	38.90V	39.00V
Maximum Power Current (Imp)	8.70A	8.80A	8.90A	9.00A	9.10A
Open-circuit Voltage (Voc)	46.10V	46.30V	46.50V	46.70V	46.90V
Short-circuit Current (Isc)	9.30A	9.40A	9.50A	9.60A	9.70A
Module Efficiency STC (%)	16.89%	17.14%	17.39%	17.64%	17.89%
Operating Temperature (°C)	-40°C~+85°C				
Maximum System Voltage	1500VDC (IEC)				
Maximum Series Fuse Rating	15A				
Power Tolerance	0~+6W				
Temperature Coefficients of Pmax	-0.39%/°C				
Temperature Coefficients of Voc	-0.32%/°C				
Temperature Coefficients of Isc	0.055%/°C				
Nominal Operating Cell Temperature (NOCT)	45±2°C				


STC: Irradiance 1000W/sqm Cell Temp: 25 AM=1.5 °C

NOCT: Irradiance 800W/sqm Ambient Temp: 20 °C AM=1.5 Wind Speed 1m/s


* Power measurement tolerance: -/+3%

Characteristics and Operating Temperature


Current-Voltage Curve in Various Light Levels

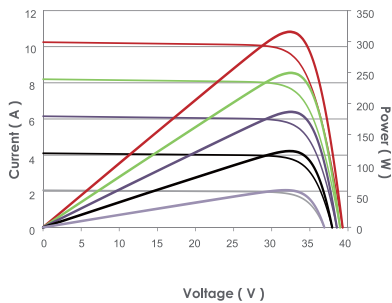

Output in Various Temp Conditions



Mechanical Diagrams

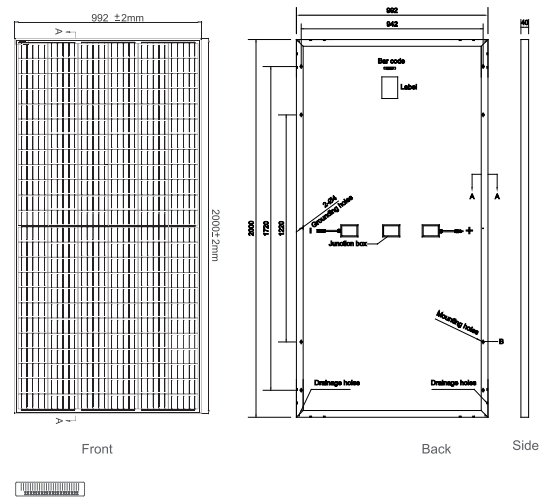

Mechanical Characteristics

Cell Type	POLY 156.75×78.375mm5/6/9/12BB
No. of cells	144 (6×12+6×12)
Dimensions	2000×992×40mm (78.74×39.06×1.57 inch)
Weight	23kg (50.7 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67/IP68 Rated, 3 diodes
Cable & Connector	4mm ² cable MC4 Compatible

Packaging Info

(Two pallets = One stack)

27pcs/pallet, 54pcs/stack, 594pcs/40'HQ Container, 270pcs/20' GP

Mysolar reserves the right to make necessary adjustment to the information described herein at any time without further notice due to continuous innovation and product improvement. Please be kindly noted installation of Mysolar solar modules shall be done by professional skilled people. Please read the installation manual carefully before using Mysolar solar panels.

Mysolar is a **Mamibot** company and brand. **Mysolar** and **Mamibot** are trademarks of Mamibot Manufacturing USA Inc.

Mamibot Manufacturing USA Inc.

www.mamibot.com Tel: 001 302 428 9888 sales@mamibot.com Head Office: Orange St. #600, Wilmington, New Castle, 19899, Delaware, USA

Mysolar Manufacturing (Shanghai) Co., Ltd.

www.mamibot.com/mysolar Tel: 0086 21 62147369 North Part, 21ST Fl, No.1, LN1040, Caoyang Rd, Putuo Dist, Shanghai, P.R.C.