

**For a Free Quote:**

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**



**Solar Panel Guide  
Specification Data Sheet**

**PolyCrown Solar Tech  
NS-250-290S6-60  
NS-250S6**

Also available on the web at  
[EnergyPal.com/polycrown-solar-tech-solar-panels/ns-250s6](http://EnergyPal.com/polycrown-solar-tech-solar-panels/ns-250s6)



Polycrown Solar

# Photovoltaic Module

## Monocrystalline60

### KEY FEATURES



High module efficiency through superior manufacturing technology



No power loss thanks to improved temperature co-efficient caused by 5 busbar solar cell



Strictly control the micro-crack of solar cells and the other non visible defect of internal modules



Module can bear snow loads up to 5400Pa and wind loads up to 2400Pa



Manufactured according to and certified international I Quality and Environment Management System



Using advanced low reflection and high light transmission glass and cell sheet surface cutting technology, in the weak light environment can also play a good performance.




### Certificates

- IEC61215, IEC61730, CQC, CE, TUV
- ISO9001:2008
- ISO14001:2004
- BSOHSAS18001:2007



### Warranties

- 10 years product warranty
- 25 years power warranty

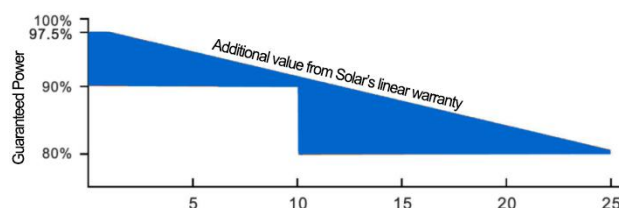


# Electrical Characteristics

Model	NS-250S6	NS-260S6	NS-270S6	NS-280S6	NS-290S6
Maximum Power at STC(Pmax)	250W	260W	270W	280W	290W
Optimum Operating Voltage (Vmp)	30.72V	30.92V	31.14V	31.18V	31.22V
Optimum Operating Current (Imp)	8.138A	8.409A	8.671A	8.98A	9.289A
Open-Circuit Voltage (Voc)	36.91V	37.36V	37.4V	37.44V	37.48V
Short-Circuit Current (Isc)	9.031A	9.279A	9.626A	9.972A	10.317A
Solar Cell Efficiency (%)	17.44	18.13	18.83	19.53	20.23
Solar Module Efficiency (%)	15.37	15.98	16.60	17.21	17.83
Operating Temperature	-40to85℃				
Maximum System Voltage	DC1000				
Maximum Series Fuse Rating	15A				
Power Tolerance	0~+3%				
STC:Irradiance 1000W/m²,Modules Temperature 25℃,AM=1.5					

## Temperature Coefficient and Mechanical Characteristics

Nominal Operating Cell Temperature (NOCT)	47℃+/-2℃
Temperature Coefficient of Pmax	-0.47%/℃
Temperature Coefficient of VOC	-0.346%/℃
Temperature Coefficient of ISC	+0.036%/℃
Solar cell	Mono156*156mm
No.of cells	60 (6×10)
Dimensions	1640mm*992mm*35mm
Weight	18kg
Front glass	3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction box	PV_*****
Connector	Plug and socket
Output cables	PV 4.0mm²,0.9m
1*20'	300 pcs
1*40'	728 pcs
1*40'HQ	784pcs

## Engineering Drawings

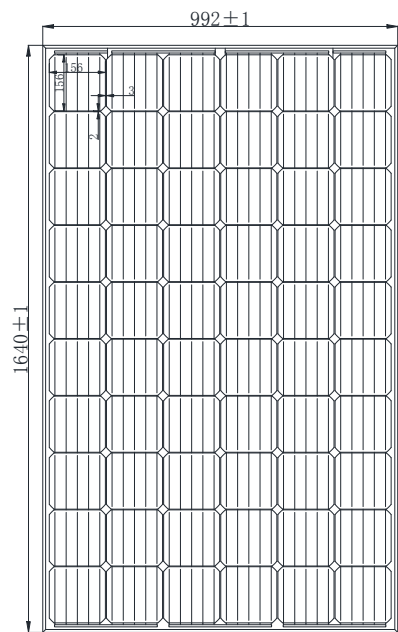

## IV-Curves

