

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Hebei Oushang Photovoltaic Technology Co., Ltd.

OS-P72 200/300W

OS-P72-200

Also available on the web at
[EnergyPal.com/hebei-oushang-photovoltaic-technology-co-ltd-solar-panels/os-p72-](http://EnergyPal.com/hebei-oushang-photovoltaic-technology-co-ltd-solar-panels/os-p72-200)

200

Polycrystalline Silicon Solar Panel
OS-P72-200W&300W
Framed 72-cell module
Range:200&300W




KEY FEATURES

-  **PID RESISTANT**
-  **High Power Output**
-  **High transmission, low Iron Tempered Glass**
-  **Bypass Diodes Protection**
-  **Salt Mist And Ammonia Resistance Test**


Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

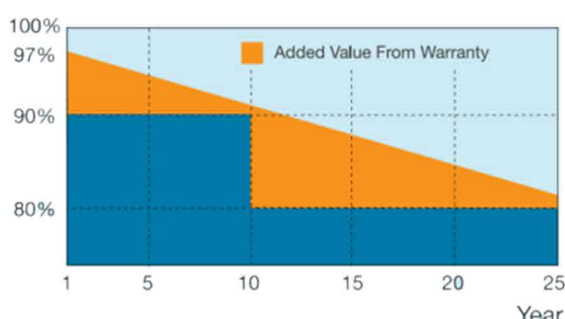

HeHebei Oushang Photovoltaic Technology Co., Ltd. Add: Dazhao Industrial Zone, Ningjin, Hebei Province, China
 Tel: +86 0311-80979366 Fax: +86 0311-80979388 Website: www.oushangsolar.com

DIMENSIONS

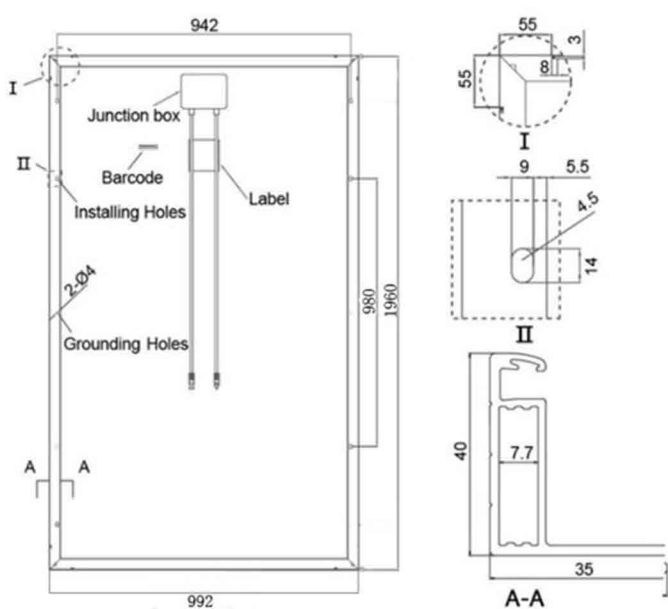

MECHANICAL CHARACTERISTICS


Frame Material	Anodized Aluminium Alloy
Front Glass	Tempered Glass
Back Cover	TPT(Composite film)
Cell Encapsulant	EVA
Junction box	IP67
Cables	2.5mm ² ,1000mm
Connector	MC4
Max wind load	2400Pa
Max snow load	5400Pa

TEMPERATURE COEFFICIENT

NOCT	47°C(±2°C)
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.35%/°C
Temperature Coefficient of Isc	0.05%/°C
Operating Temperature	-40°C ~ +85°C

STC:Irradiance 1000w/m², Cell temperature 25°C,AM=1.5,Measuring tolerance:±3%

I-V CURVES

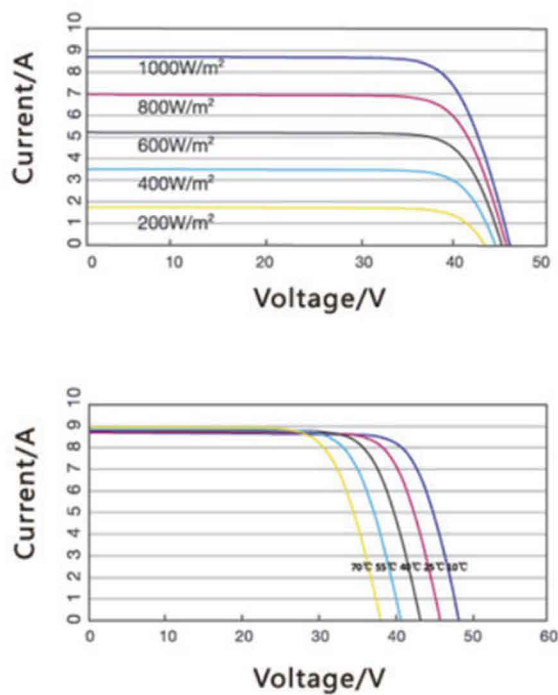

ELECTRONICAL CHARACTERISTICS

Module Type	OS-P72-200	OS-P60-300
Maximum Power(Pmax)	200W	300W
Maximum Power Voltage(Vmp)	37.2V	36.2V
Maximum Power Current(Imp)	5.38A	8.28A
Open Circuit Voltage(Voc)	46.1V	43.2V
Short Circuit Current(Isc)	5.65A	9.27A
Number of Cells	72(6*12)	72(6*12)
Size of Cells(mm)	156*104	156*156
Dimensions(mm)	1320*992*35	1960*992*40
Power Tolerance	+(0-3)%	
Maximum System Voltage	1000VDC	