

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet



Wuxi Saijing Solar Co., Ltd.

P6 100-105

P6-100

Also available on the web at
EnergyPal.com/wuxi-saijing-solar-co-ltd-solar-panels/p6-100

POLYCRYSTALLINE
SILICON MODULE

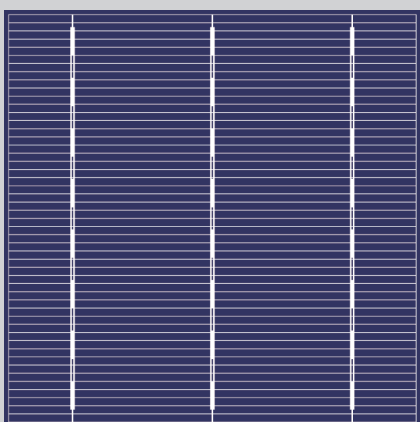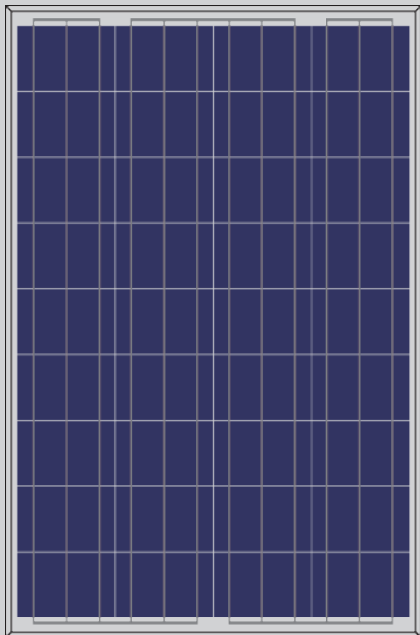

5 years
products
warranty

25 year
power output
warranty

Add: Industrial Park C, Guanlin Town,
Yixing 214251, Jiangsu Province,
China

Tel: +86-25-86592702

Fax: +86-25-86592703

Email: sales@ecsolar.com

Web: www.ecsolar.com

 **ECSOLAR**

P6-100 P6-105

POLYCRYSTALLINE SILICON MODULE

Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w

Warranty

- 5 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

Comprehensive Certificates

- ISO 9001:2008: Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUV Certificate




Specifications subject to technology and test conditions, ECSOLAR Solar reserves the right of final interpretation


P6-100 P6-105



▼ Engineering Drawings (Front Side)

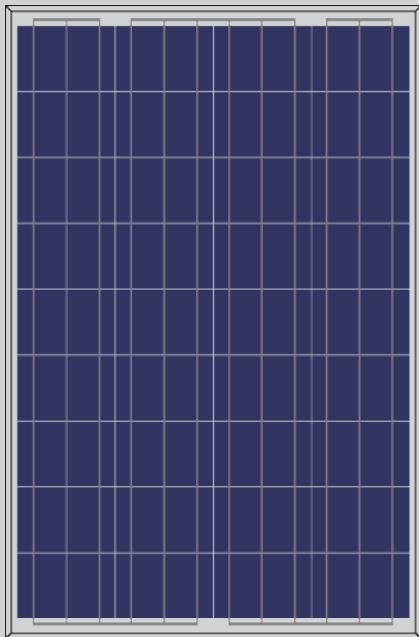

▼ Engineering Drawings (Back Side)

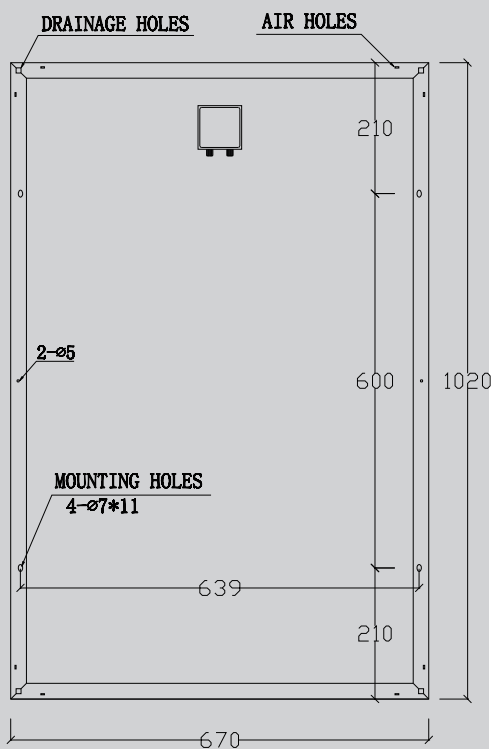

Add: Industrial Park C, Guanlin Town,
Yixing 214251, Jiangsu Province,
China

Tel:+86-25-86592702

Fax:+86-25-86592703

Email: sales@ecsolar.com

Web:www.ecsolar.com

Raw materials and Mechanical Parameters

	P6-100	P6-105
Type of Cells(mm)	pvoly156 × 104/156 × 52	
NO. of Cells and Connections	4 × 9=36/4 × 18=72	
Dimensions(mm)(L*W*H)	1020 × 670 × 30	
Weight(kg)	7.7	
Glass	3.2mm Tempered Glass	
Encapsulation	EVA	
Backsheet	Multilayer Composite	
Aluminium-Frame	Silvery/Black Anodized aluminium alloy	
Junction-Box	IP65/IP67	
Cable	NA, but customized is acceptable	
Connector	NA, but MC4 and MC4 Compatible are acceptable	
Package Configuration	4pcs/ctn	

Performance Parameters

	P6-100	P6-105
Maximum System Voltage	700V	
Operating Temperature	-45~+80°C	
Maximum Series Fuse	10A	
Maximum Static Load,Front Side (e.x. Snow,Wind)	5400PA	
Maximum Static Load, Back Side(e.x. Wind)	2400PA	
Application Grade	Class A	

Electrical Parameters (Standard Test Condition)

	P6-100	P6-105
Rated Maximum Power(Mp)	100W	105W
Power Tolerance	0- +5W	
Cell Efficiency	17.20%	18.01%
Open Circuit Voltage(Voc)	22.6V	22.6V
Maximum Power Voltage(Vmp)	17.6V	17.6V
Short Circuit Current(Isc)	6.09A	6.29A
Maximum Power Current(Imp)	5.69A	5.97A
Temperature Coefficient of Isc	+0.06%	
Temperature Coefficient of Voc	-0.33%	
Temperature Coefficient of Pmp	-0.45%	
Standard Test Condition	Irradiance:1000W/M2,Cell Temperature:25°C,Spectrum AM:1.5	

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.