

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet



Fortune CP Ltd

P6-20

P6-20

Also available on the web at
EnergyPal.com/fortune-cp-ltd-solar-panels/p6-20

POLYCRYSTALLINE SILICON MODULE

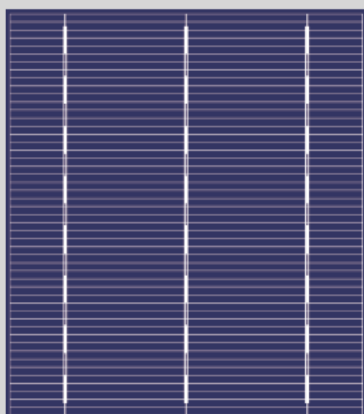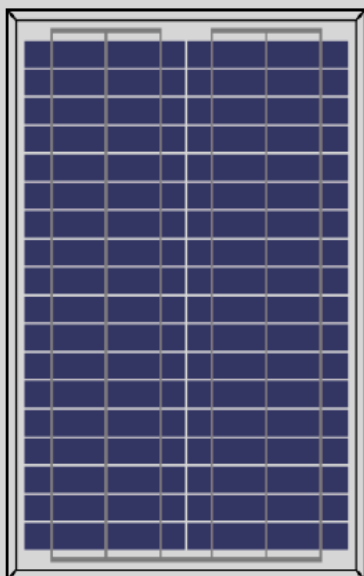

5 years
products
warranty

25 year
power output
warranty



POLYCRYSTALLINE SILICON MODULE

Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(2400pa).



High salt and ammonia resistance



Positive power tolerance: 0-+5w

Warranty

- 5 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

Comprehensive Certificates




Fortune CP Ltd

Regus House, Admirals Park, Dartford, Kent, DA2 6QD


Tel: (44) 1322303070, Fax (44) 1322303072

Email: sales@fortunecp.co.uk Website: www.fortunecp.com

▼ Engineering Drawings (Front Side)

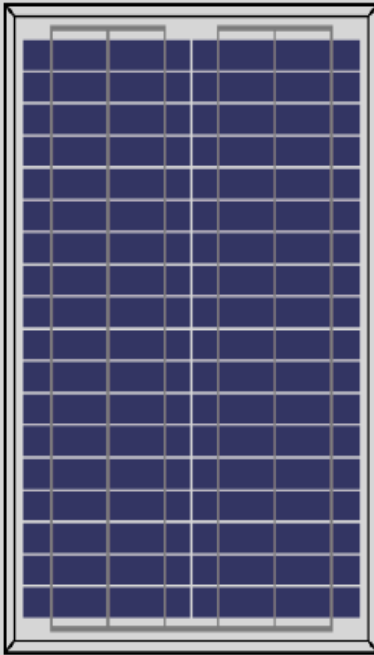

▼ Engineering Drawings (Back Side)

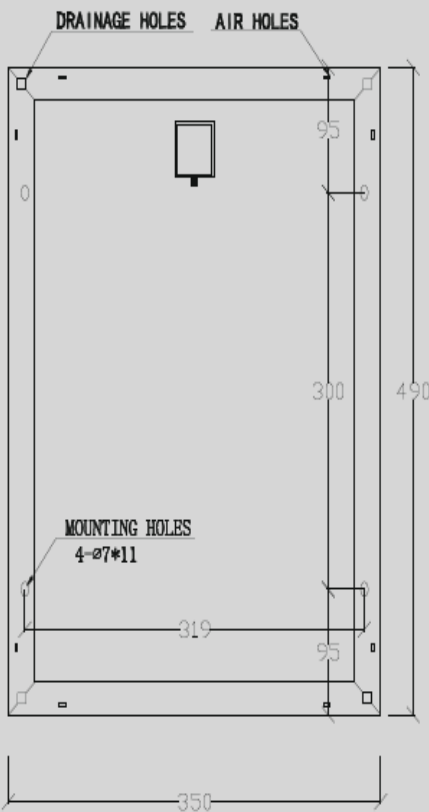

Raw materials and Mechanical Parameters

P6-20	
Type of Cells(mm)	poly156 × 22.2
NO. of Cells and Connections	2 × 18=36
Dimensions(mm)(L*W*H)	490 × 350 × 25
Weight(kg)	1.95
Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer Composite
Aluminium-Frame	Silvery/Black Anodized aluminium alloy
Junction-Box	IP65
Cable	NA, but customized is acceptable
Connector	NA, but MC4 and MC4 Compatible are acceptable
Package Configuration	10pcs/ctn

Performance Parameters

P6-20	
Maximum System Voltage	700V
Operating Temperature	-45~+80℃
Maximum Series Fuse	/
Maximum Static Load,Front Side (e.x. Snow,Wind)	2400PA
Maximum Static Load, Back Side(e.x. Wind)	2400PA
Application Grade	Class A

Electrical Parameters (Standard Test Condition)

P6-20	
Rated Maximum Power(Mp)	20W
Power Tolerance	0- +5W
Cell Efficiency	16.4%
Open Circuit Voltage(Voc)	22.4V
Maximum Power Voltage(Vmp)	17.4V
Short Circuit Current(Isc)	1.23A
Maximum Power Current(Imp)	1.15A
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.33%
Temperature Coefficient of Pmp	-0.45%
Standard Test Condition	Irradiance:1000W/M2,Cell Temperature:25℃,Spectrum AM:1.5

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.

Fortune CP Ltd

Regus House, Admirals Park, Dartford, Kent, DA2 6QD

Tel: (44) 1322303070, Fax (44) 1322303072

Email: sales@fortunecp.co.uk Website: www.fortunecp.com