

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**



**Solar Panel Guide
Specification Data Sheet**

Parasol Energy Ltd.

PEL36P060

PEL36P060


Also available on the web at
EnergyPal.com/parasol-energy-ltd-solar-panels/pel36p060

Technical Data Sheet

PEL36P060

IEC 61215, IEC61730 1-2 Certified

Parasol 60 W solar panel

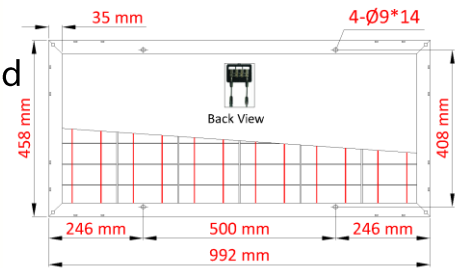

Characteristics

Electrical Characteristics

Maximum Power (Pmax)	60 Wp
Warranted Minimum Power	55 Wp
Voltage at Pmax (Vmp)	18.69 V
Current at Pmax (Imp)	3.317 A
Short Circuit current (Isc)	3.522 A
Open Circuit voltage (Voc)	22.64 V
Temperature coefficient of Current	4.71 mA/K
Temperature coefficient of Voltage	-2.02 mV/K
Temperature coefficient of Power	-0.41 %/K
NOCT @ AT 20°C, irr. 800 W/m², WS	46±2°C
Fill Factor (FF)	77%
Maximum System Voltage	1000 V (TüV rating)

Mechanical Characteristics

Junction Box Type	IEC certified IP65 rated 2-terminal JB with by-pass diodes, PPO/PA black
Connectors and Cables Type	4 mm² with MC4 connectors
Construction	Front: high transmission >91.6% glass. Rear: White Tedlar Encapsulant: EVA
Glass	High trans.>91.6% low-iron 3.2mm
Frame	Clear anodized aluminium alloy 6063-T5. Color: Silver
Series Fuse Rating	4 Ampere


Specifications

Specifications

Cell Size (mm)	156 x 64.5
Cell Efficiency (%)	>17.2
Number of cells (Pcs)	36 (6 x 6)
Size of module (mm)	992 x 458 x 35
Weight per piece (kg)	5.5

Quality and Safety

Quality Certification	IEC61215 and IEC61701 by TüV
Electrical Safety	IEC61730-1 and -2
Safety class	II
Quality test sampling for TüV	IEC60410
Conformity to EC Directive	89/33/EEC, 73/23/EEC, 93/68/EEC

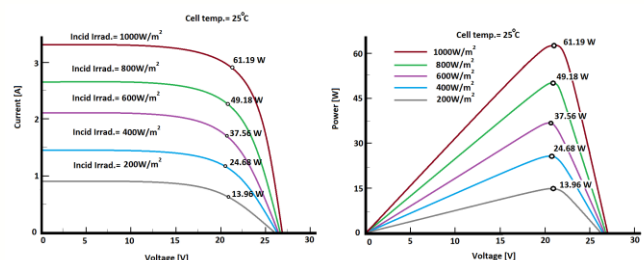

STC: Irradiance 1000W/m², Module temperature 25°C, AM1.5 spectrum

Conditions

- Warranty: 5 years limited product workmanship warranty, 25 years limited output warranty: 10 years warranty for 90% rated power output, 25 years warranty for 80% rated power output
- Standard Testing Conditions (STC), irradiance of 1000W/m² at an AM1.5G solar spectrum and a cell temperature of 25°C
- This publication summarizes product warranty and specifications which are subject to change without notice

