

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal


Solar Panel Guide Specification Data Sheet

**Guangdong Prostar New Energy Technology Co.,
Ltd.**

PMS330-360M-72

PMS330M-72

Also available on the web at
EnergyPal.com/guangdong-prostar-new-energy-technology-co-ltd-solar-panels/pms330m-72

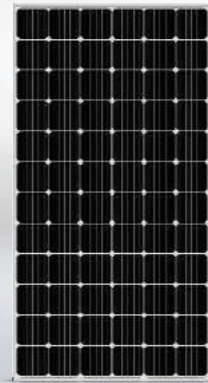

Monocrystalline Solar Module 单晶硅太阳能组件

PMS360M-72

72 CELL
Mono Crystalline Module

18.74%
Maximum Efficiency

360W
Power Output Range

0/+3W
Positive Power Tolerance



Function Features 功能特点



Maximize Limited Space

72-cell module power output up to 350W.



High Efficiency

High module conversion efficiency (up to 18.74%), through innovative manufacturing technology.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Low-light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



Maximized Energy Harvest

Impedance matching technology eliminates mismatch losses, more power from each module bin.




Higher quality assurance

100% EL test before and after lamination, and finished products EL test, providing higher quality assurance.

LINEAR PERFORMANCE WARRANTY

10-Year Product Warranty


25-Year Linear Power Warranty

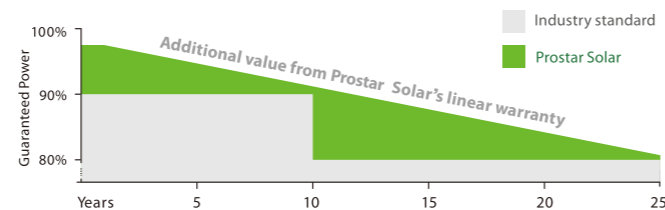

PMS360M-72

Monocrystalline Solar Module 单晶硅太阳能组件

Engineering Drawings 装配图

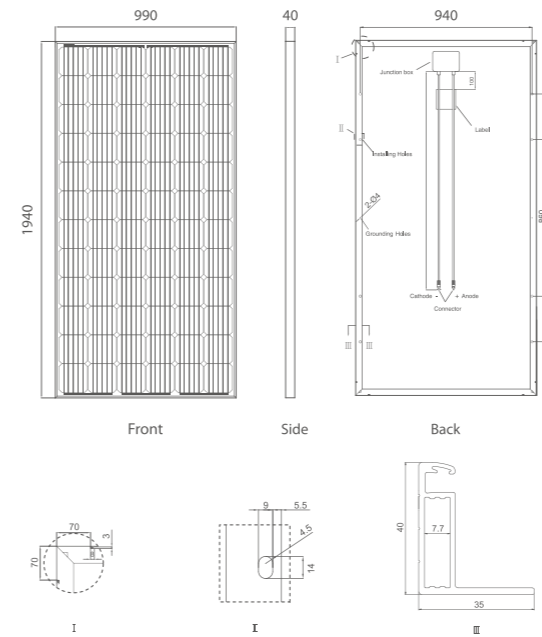


Packaging Configuration 包装标准

(Two boxes=One pallet)

26pcs/ box, 52pcs/pallet, 624 pcs/40'GP Container

Current-Voltage Curves 曲线图

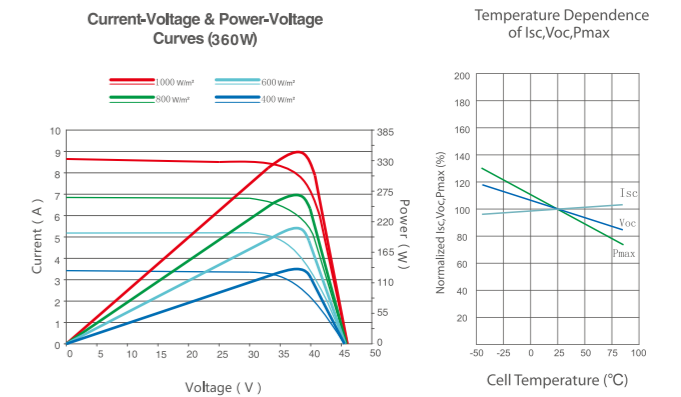

Mechanical Characteristics 机械性能

Cell Type	Monocrystalline 156 × 156mm
Cell Number	72 (6 × 12)
Dimensions	1940 × 990 × 40mm
Weight	20.5 kg
Front Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	1x4.0mm ² , Length:900mm

Technical Specifications 技术参数

Module Type	PMS330M-72		PMS335M-72		PMS340M-72		PMS345M-72		PMS350M-72		PMS355M-72		PMS360M-72	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	330Wp	246Wp	335Wp	250Wp	340Wp	254Wp	345Wp	256Wp	350Wp	262Wp	355Wp	266Wp	360Wp	272Wp
Maximum Power Voltage (Vmp)	38.2V	35.8V	38.4V	36.0V	38.6V	36.2V	38.8V	36.5V	39.0V	36.7V	39.2V	36.9V	39.3V	37.2V
Maximum Power Current (Imp)	8.64A	6.87A	8.73A	6.94A	8.81A	7.01A	8.90A	7.08A	8.98A	7.14A	9.06A	7.22A	9.17A	7.31A
Open-circuit Voltage (Voc)	46.7V	44.1V	46.9V	44.3V	47.1V	44.5V	47.3V	44.7V	47.5V	44.9V	47.8V	45.2V	49.1V	46.6V
Short-circuit Current (Isc)	9.34A	7.49A	9.43A	7.57A	7.49A	9.49A	9.57A	7.68A	9.70A	7.76A	9.78A	7.85A	9.90A	7.90A
Module Efficiency STC (%)	17.18%		17.44%		17.70%		17.96%		18.22%		18.48%		18.74%	
Operating Temperature(°C)													-40°C~+85°C	
Maximum system voltage													1000VDC (IEC)	
Maximum series fuse rating													15A	
Power tolerance													0~+3W	
Temperature coefficients of Pmax													-0.39%/°C	
Temperature coefficients of Voc													-0.29%/°C	
Temperature coefficients of Isc													0.05%/°C	
Nominal operating cell temperature (NOCT)													45±2°C	

STC: ☀ Irradiance 1000W/m² 🌡 Cell Temperature 25°C 🌤 AM=1.5

NOCT: ☀ Irradiance 800W/m² 🌡 Ambient Temperature 20°C 🌤 AM=1.5 🌀 Wind Speed 1m/s

* Remarks: Products specifications are subject to change without notice.