

**For a Free Quote:**

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Phono Solar Technology Co., Ltd.  
Dual Glass Poly/260-275  
PS270PGF(H)-20/U**

Also available on the web at  
[EnergyPal.com/phono-solar-technology-co-ltd-solar-panels/ps270pgf-h-20-u](http://EnergyPal.com/phono-solar-technology-co-ltd-solar-panels/ps270pgf-h-20-u)

# Phono<sup>®</sup> Solar

## Dual Glass Module

### Poly/260-275W



#### Fire Application Class A

Fireproof dual glass module structure allows more safety



#### PID Resistant



#### Higher Reliability


Enhanced reliability and better anti-corrosiveness in harsh environments

Bloomberg  
NEW ENERGY FINANCE

Tier1



TOP  
PERFORMER

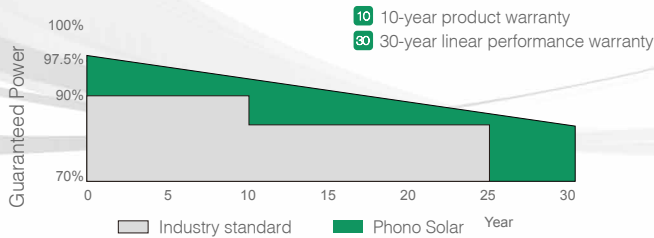

EN EN-20180809

**SINOMACH | SUMEC**  
SUMEC GROUP CORPORATION

## ELECTRICAL TYPICAL VALUES

Model	PS260PGF-20/U PS260PGFH-20/U	PS265PGF-20/U PS265PGFH-20/U	PS270PGF-20/U PS270PGFH-20/U	PS275PGF-20/U PS275PGFH-20/U
Type	Polycrystalline 6 inch x 6 inch square, 6 × 10 pieces in series			
Rated Power (Pmpp)	260W	265W	270W	275W
Tolerance	0~+5w			
Rated Current (Impp)	8.44	8.51	8.59	8.66
Rated Voltage (Vmpp)	30.81	31.14	31.44	31.76
Short Circuit Current (Isc)	8.94	9.04	9.09	9.17
Open Circuit Voltage (Voc)	37.69	38.03	38.39	38.68
Module Efficiency (%)	15.66	15.96	16.26	16.56
NOCT (Nominal Operation Cell Temperature)	45±2°C			
Voltage Temperature Coefficient	-0.31%/°C			
Current Temperature Coefficient	+0.085%/°C			
Power Temperature Coefficient	-0.41%/°C			

## MECHANICAL CHARACTERISTICS

Dimension (L× W × H)	Length: 1664mm (65.51 inch) Width: 998mm (39.29 inch) Height: 20mm (0.79 inch)
Weight	20kg (44.09 lb)
Glass	2.0mm/2.0mm heat-strengthened glass(front/back)
Frame	Anodized aluminium alloy
Cable	4mm <sup>2</sup> (IEC) , Length:1150mm or Customized length
Junction Box	IP 68 rated

## ABSOLUTE MAXIMUM RATING




Parameter	Values
Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Surface Maximum Load Capacity	Up to 2400Pa
Maximum Series Fuse Rating	20A
IEC Application Class (IEC61730)	A
Fire Rating (IEC61730)	A
Module Fire Performance (UL 1703)	Type1
Maximum System Voltage	DC 1000V/1500V (IEC)

## PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	162	702

- In compliance with our warranty terms and conditions.
  - Measurement conditions under irradiance level of Standard Test Conditions(STC): 1000W/m
- Air mass 1.5 Spectrum, cell temperature of 25°C.

## ELECTRICAL CHARACTERISTICS

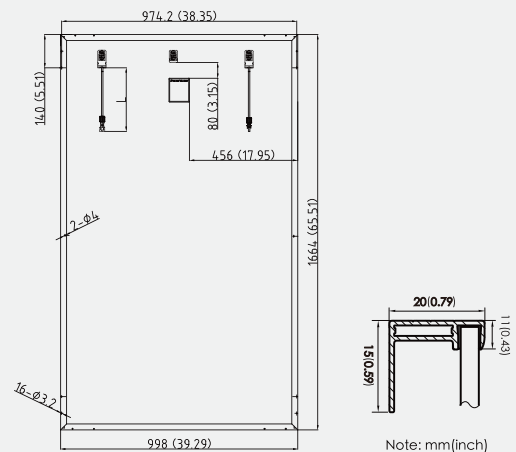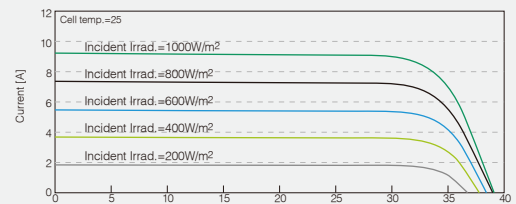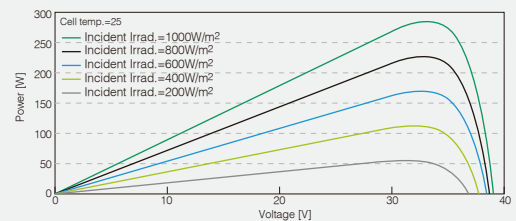

**Phono<sup>®</sup> Solar**

**Note:** This datasheet is not legally binding. Phono Solar Technology Co., Ltd. reserves the right to adjust specifications without notice. Further information please refer to our [Website:www.phonosolar.com](http://www.phonosolar.com), [E-mail:info@phonosolar.com](mailto:info@phonosolar.com)