

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**OpalSolar  
QSA350-365M-72-S  
QSA365M-72-S**

Also available on the web at  
[EnergyPal.com/opalsolar-solar-panels/qa365m-72-s](http://EnergyPal.com/opalsolar-solar-panels/qa365m-72-s)

# OpalSolar

## QSA-72M Series MONOCRYSTALLINE PERC MODULE

### Key Features



Up To 18.9% Module Efficiency



Monocrystalline Perc Modules Designed For Residential, Commercial And Utility Applications - Rooftop Or Ground Mount



12 Year Product Warranty



Designed For IEC DC 1000V Applications



OPAL Solar is a premium product made by Tier 1 manufacturer on the basis of the local support, independent quality control, independent factory acceptance testing and technical support in Australia.

OPAL Solar is locally supported through Solar Juice Pty Ltd, the leading supplier of PV products in the Australian market. You can be assured that it is a trusted brand that does not compromise on quality.

The panels are produced by ISO 9001 and ISO 14001 certified production facilities. Back to back warranty agreements are in place to provide peace of mind.

### HEAD OFFICE

**Solar Juice Pty Ltd**  
Unit 1, 10-12 Forsyth Close  
Wetherill Park, NSW 2164  
Phone: 02 9725 1111  
[solarjuice.com.au](http://solarjuice.com.au)

### COMPREHENSIVE CERTIFICATES

#### Certificates

IEC 61215: 2016  
IEC 61730: 2016

#### Manufacturing Under

ISO 9001: 2008: Quality management systems  
ISO 14001: 2004: Environmental management systems

### CEC APPROVED

#### Certificate Holder: Solar Juice Pty Ltd

Model number:  
QSA350M-72-S  
QSA355M-72-S  
QSA360M-72-S  
QSA365M-72-S



For more information, please scan the QR code or visit [www.opalsolar.com.au](http://www.opalsolar.com.au)



## MECHANICAL PARAMETERS

Cell(mm)	Monocrystalline
Weight(kg)	21.8
Dimensions (LxWxH) (mm)	1954x990x40
No. of Cells and Connections	72(6x12)
Frame	Aluminium, Silver Anodized
Junction Box/ Output Connectors	IP67/ HCB40
Cable Length	1150mm
Front Glass Thickness(mm)	3.2
Packaging Configuration	27 Modules per Pallet

## WORKING CONDITIONS

Maximum System Voltage	1000Vdc
Operating Temperature	-40 °C ~+ 85°C
NOCT	46±2°C
Power Sorting	±3%
Mechanical Loading	5400 Pa
Max. Fuse Current Rating	15A
Temperature Coefficient of Isc	+0.043%/°C
Temperature Coefficient of Voc	-0.282%/°C
Temperature Coefficient of Pmax	-0.376%/°C

## ELECTRICAL PARAMETERS (STC)

Model Number	QSA350M-72-S	QSA355M-72-S	QSA360M-72-S	QSA365M-72-S
Rated Power in Watts-Pmax (Wp)	<b>350</b>	<b>355</b>	<b>360</b>	<b>365</b>
Open Circuit Voltage-Voc (V)	47.01	47.31	47.62	47.82
Short Circuit Current-Isc (A)	9.53	9.60	9.66	9.75
Maximum Power Voltage-Vmpp (V)	38.58	38.82	39.14	39.38
Maximum Power Current-Impp (A)	9.08	9.15	9.20	9.27
Module Efficiency	18.1%	18.4%	18.6%	18.9%


STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

## ELECTRICAL PARAMETERS (NOCT)

Model Number	QSA350M-72-S	QSA355M-72-S	QSA360M-72-S	QSA365M-72-S
Maximum Power-Pmax (Wp)	257.8	261.5	265.1	268.8
Open Circuit Voltage-Voc (V)	43.59	43.87	44.15	44.34
Short Circuit Current-Isc (A)	7.66	7.71	7.76	7.83
Maximum Power Voltage-Vmpp (V)	35.58	35.81	36.13	36.36
Maximum Power Current-Impp (A)	7.24	7.30	7.34	7.39

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s  
Power Production Tolerance ±5%

## ENGINEERING DRAWINGS

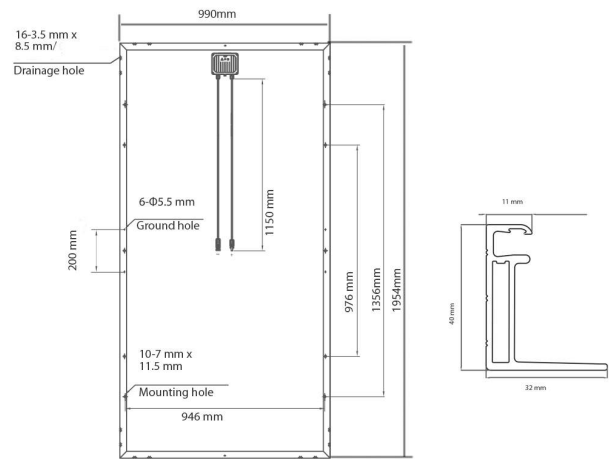

## I-V CURVE

