

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Resun Solar Energy Co., Ltd.**

**RS6C-P**

**RS6C 270P**

Also available on the web at  
[EnergyPal.com/resun-solar-energy-co-ltd-solar-panels/rs6c-270p](http://EnergyPal.com/resun-solar-energy-co-ltd-solar-panels/rs6c-270p)

# RS6C-P

## 250/255/260/265/270P

### All-Purpose Module

RS6C is a robust solar module with 60 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Resun Solar's modules meet the highest quality standards possible.

### Polycrystalline Silicon Solar Modules

#### Features



High module conversion efficiency (up to 16.60%), through superior manufacturing technology



Guaranteed 0- +5W positive power output tolerance ensures high reliability



Self-clean

Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust




Weak light

Excellent performance under low light environments (mornings, evenings and cloudy days)



2400Pa  
5400PA

Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)\*

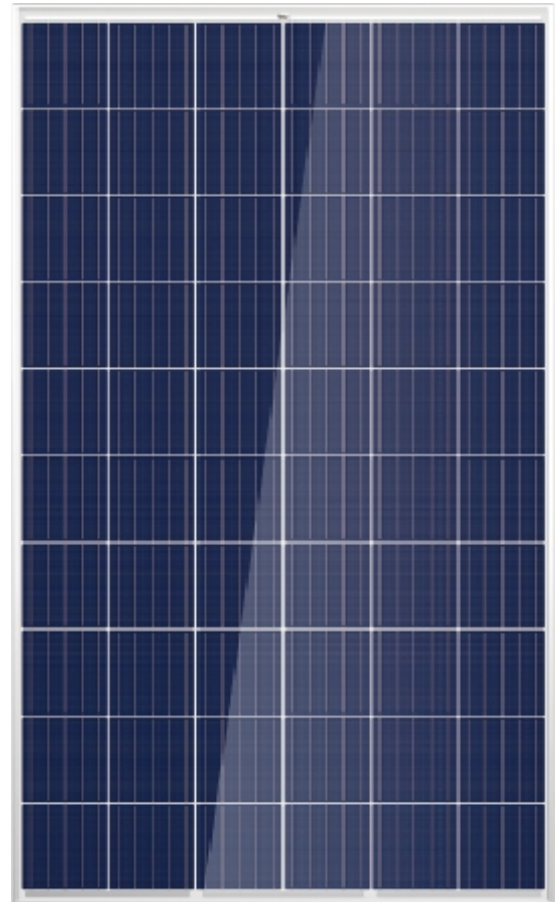


### All-purpose Module

Sales network covers more than 50 countries, providing customers with instant after sales service and an efficient supply-chain, our clients can be found throughout the world, such as North America, Europe, Oceania, Eastern Europe, East Asia, Middle Easter and Africa etc. Resun Solar team works closely with our customers to provide them with solutions for all their solar needs.



Resun reputation is founded on more than 300MW of high performance solar modules installed around the world.


### Industry-leading warranty

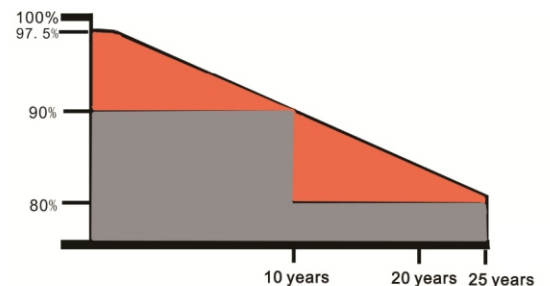


- 25 year transferable power output warranty: 10 year/90%; 25 year/80%.
- Based on nominal power.
- 10 year material and workmanship warranty.

# RS6C-P

## 250/255/260/265/270P

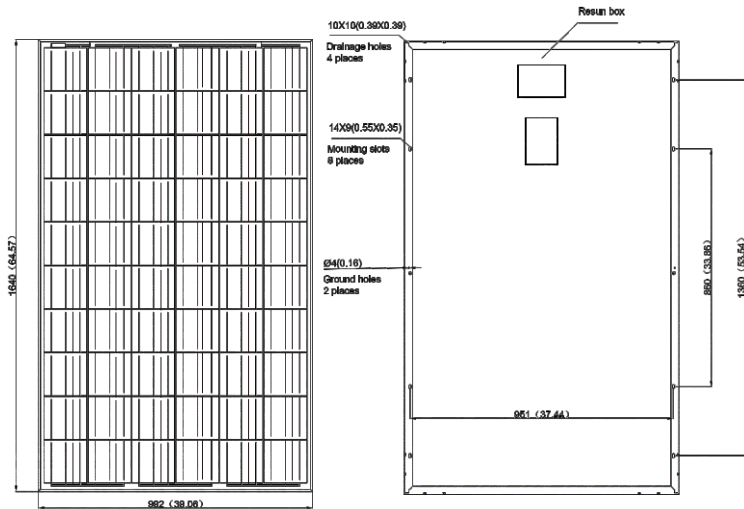

### IV-Curves

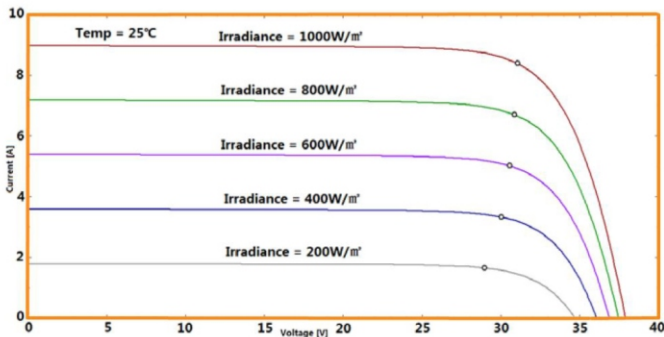

### Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.43%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.065%/°C

### Packing Configuration

Container	20'GP	40'HQ
Pieces	300	832

### Electrical Data

STC	RS6C 250P	RS6C 255P	RS6C 260P	RS6C 265P	RS6C 270P
Nominal Maximum Power(Pmax)	250W	255W	260W	265W	270W
Optimum Operating Voltage(Vmp)	29.9V	30.1V	30.3V	30.5V	30.7V
Optimum Operating Current(Imp)	8.36A	8.47A	8.58A	8.69A	8.79A
Open CIRCUIT voltage(Voc)	37.3V	37.5V	37.7V	37.8V	37.9V
Short Circuit Current(Isc)	8.81A	8.88A	8.95A	9.01A	9.76A
Module Efficiency	15.4%	15.70%	16.01%	16.32%	16.60%
Operating Temperature	-40°C~+85°C				
Maximum System Voltage	1000V(IEC)/600V(UL)				
Maximum Series Fuse Rating	15A				
Application Classification	Class A				
Power Tolerance	0 ~ + 5W				

Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C

NOCT	RS6C 250P	RS6C 255P	RS6C 260P	RS6C 265P	RS6C 270P
Nominal Maximum Power (Pmax)	185W	188W	192W	195W	198W
Optimum Operating Voltage (Vmp)	27.6V	27.8V	28.1V	28.3V	28.5V
Optimum Operating Current (Imp)	6.70A	6.76A	6.82A	6.89A	6.95A
Open Circuit Voltage (Voc)	34.5V	34.7V	34.9V	35.1V	35.4V
Short Circuit Current (Isc)	7.10A	7.15A	7.20A	7.24A	7.29A

Under Normal Operating Cell Temperature, irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C wind speed 1m/s

### Mechanical Data

Cell Type	Poly-crystalline 156 x 156mm,4 or 5 Bus bars
Cell Arrangement	60 (6x10)
Dimensions	1640 x 992 x 40mm(64.57 x 39.06 x 1.57in)
Weight	19kg
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP65 or IP67, 6 Diodes
Cable	4mm2(IEC)/12AWG(UL),1150mm
Connectors	MC4 or MC4 Comparable
Standard Packaging (Modules per Pallet)	32pcs
Module Pieces per container (40HQ)	832pcs (40'HQ)

### Resun Solar Energy Co.,Ltd

Add:No 15 Puzhuang Avenue,Wuzhong District,Suzhou, Jiangsu China.

Tel:+86 0512 66292101

Fax:+86 0512 66293858

E-mail:info@resunsolar.com

http://www.resunsolar.com