

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Risen Energy Co., Ltd.

RSM72-6-370P-395P

RSM72-6-395P

Also available on the web at
EnergyPal.com/risen-energy-co-ltd-solar-panels/rsm72-6-395p

HIGH PERFORMANCE CAST-MONO MODULE

RSM72-6-370P-395P

72 CELL CAST-MONO MODULE

370-395Wp POWER OUTPUT RANGE

1500VDC MAXIMUM SYSTEM VOLTAGE

20.0% MAXIMUM EFFICIENCY



About Risen Energy

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.

KEY SALIENT FEATURES



Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing



Industry leading lowest thermal co-efficient of power



Industry leading 12 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive tight power tolerance



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses



Warranted reliability and stringent quality assurances well beyond certified requirements



Certified to withstand severe environmental conditions

- ♦ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
- ♦ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
- ♦ Excellent mechanical load 2400Pa & snow load 5400Pa resistance



ISO9001
ISO14001
OHSAS18001
IEC TS 62941



RISEN ENERGY CO., LTD.

Tashan Industry Zone, Meilin,
Ninghai 315609, Ningbo | PRC

Tel: +86-574-59953239


Fax: +86-574-59953599

E-mail: marketing@risenenergy.com

Website: www.risenenergy.com


LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 25 year Linear Power Warranty

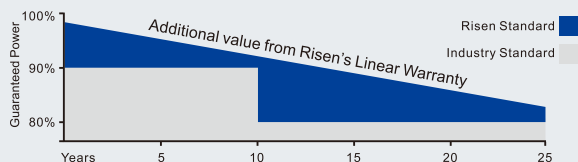

★ Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd

Dimensions of PV Module Unit: mm

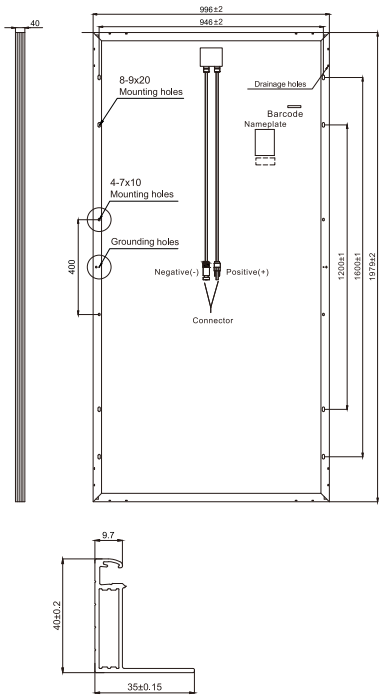

ELECTRICAL DATA (STC)

Model Number	RSM72-6-370P	RSM72-6-375P	RSM72-6-380P	RSM72-6-385P	RSM72-6-390P	RSM72-6-395P
Rated Power in Watts-Pmax(Wp)	370	375	380	385	390	395
Open Circuit Voltage-Voc(V)	47.80	48.20	48.60	49.00	49.40	49.80
Short Circuit Current-Isc(A)	9.95	10.00	10.05	10.10	10.15	10.20
Maximum Power Voltage-Vmpp(V)	39.67	40.01	40.34	40.67	41.00	41.33
Maximum Power Current-Impp(A)	9.34	9.39	9.43	9.48	9.52	9.57
Module Efficiency (%) *	18.8	19.0	19.3	19.5	19.8	20.0

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
 * Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

Model Number	RSM72-6-370P	RSM72-6-375P	RSM72-6-380P	RSM72-6-385P	RSM72-6-390P	RSM72-6-395P
Maximum Power-Pmax (Wp)	276.8	280.5	284.2	288.0	291.7	295.5
Open Circuit Voltage-Voc (V)	43.98	44.34	44.71	45.08	45.45	45.82
Short Circuit Current-Isc (A)	8.06	8.10	8.14	8.18	8.22	8.26
Maximum Power Voltage-Vmpp (V)	36.06	36.36	36.66	36.97	37.27	37.57
Maximum Power Current-Impp (A)	7.67	7.71	7.75	7.79	7.83	7.86

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Cast-Mono, 5BB
Cell configuration	72 cells (6×12)
Module dimensions	1979×996×40mm
Weight	22.5kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6063T5, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), 1200mm length
Connector	Risen Twinsel PV-SY02, IP68



TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.38%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	594	270
Number of modules per pallet	27	27
Number of pallets per container	22	10
Packaging box dimensions (LxWxH) in mm	2005×1130×1130	2005×1130×1130
Box gross weight[kg]	655	655

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
 ©2019 Risen Energy. All rights reserved. Specifications included in this datasheet are subject to change without notice.

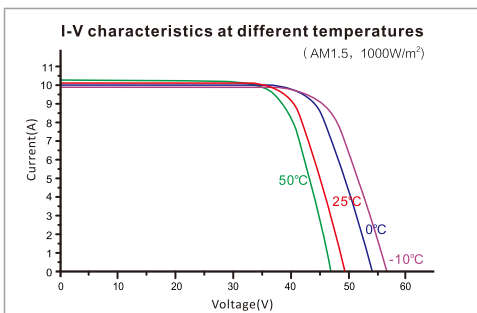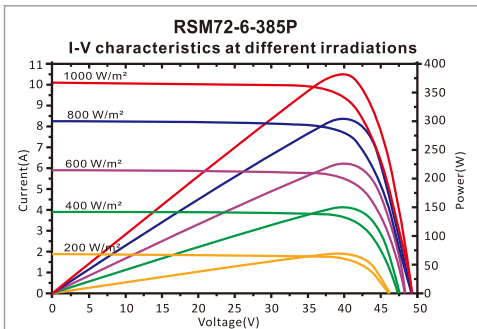

Our Partners: