For a Free Quote:

Web: **EnergyPal.com** Call: **1-800-990-3725**

Email: contact@energypal.com




Solar Panel Guide
Specification Data Sheet

Learn more at energypal.com/best-solar-panels-for-homes

Sunny Apex

110W Solar Module High Efficiency Back-Contact

- Sunny Apex's HOP series solar modules ranged from 35Watt to 155Watt
- Aesthetically using clear surface back-contact cells
- © Cells with High conversion efficiency above 23%
- Anodized aluminum improving corrosion resistance
- Excellent performance under low light conditions





Electrical Specifications

Model Type	SA-H110	SA-H105
Peak Power (Pmax)	110W	105W
Module Efficiency	20.10%	19.20%
Maximum Power Voltage (Vmp)	17.9V	17.9V
Maximum Power Current (Imp)	6.1A	5.8A
Open Circuit Voltage (Voc)	21.6V	21.6V
Short Circuit Current (Isc)	6.8A	6.5A
Power Tolerance	-5% / + 10%	
Maximum System Voltage	70V	
Norminal Operating Cell Temp.	46 °C (+/- 2)	

Mechanical Specifications


Cell type	Back contact high eff. Mono
Number of cells	32 cells in series
Weight	7.1kg [15.65lbs]
Dimensions	1037 x 527 x 35mm
	[40.86 x 20.76 x 1.38in]
Frame	> 15µm clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm ² , 900mm
Connectors	MC4 compatible


Temperature Coefficients

Power	-0.32%/ °C
Voltage	-1.8mV/ °C

Warranties & Certifiations

Warranties	2 years product warranty, 20 years limited power
	warranty of 80% of the mnimum specificed power rating
Cartificates	CF

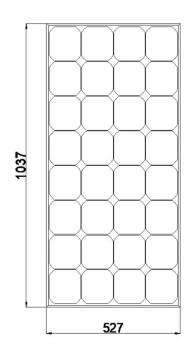

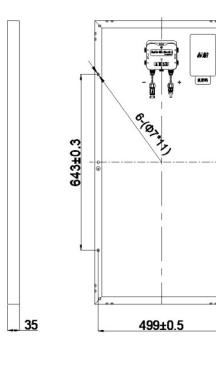

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m2, AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2017 Sunny Apex Development Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.

Sunny Apex Development Limited