

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Sunceco  
SEP 330-340 HC  
SEP 330 HC**

Also available on the web at  
[EnergyPal.com/sunceco-solar-panels/sep-330-hc](http://EnergyPal.com/sunceco-solar-panels/sep-330-hc)

# 330 W – 340 W Poly-crystalline Solar Module



## Enhanced Reliability and Power Output

- More internal reflection, better utilization of sunlight, more power output
- Enhanced module efficiency up to 17.1 %
- Innovative half-cut cell technology
- Less power output loss with new module circuit design
- Lower internal current, excellent anti-hot-spot performance
- Low NOCT & low temperature coefficient

## Robust Design

- Strong anodized aluminum alloy frame
- Certified by TÜV to withstand up to 2400 Pa wind load and up to 5400 Pa snow load
- Easy installation and minimal maintenance with compatibility to industry standard inverters and mounting systems

## Certificates



## Warranty

10 Years: Manufacturing Warranty

12 Years Warranty: 90% Power Output

25 Years Warranty: 80% Power Output


## Mechanical Characteristics

Cell type	Poly-crystalline
Cell Dimensions	156.75 × 156.75 mm, half-cut
Cell Arrangement	72 (6 × 12)
Weight	23 kg
Module Dimensions	2000 × 992 × 40 mm
Glass	3.2 mm, high transmission, tempered
Connector	MC4 compatible
Cable Length	300 mm
Cable Cross-section Size	4 mm <sup>2</sup>
No. of Bypass Diodes	3/6

# Electrical Characteristics

SOLAR CELLS		POLY-CRYSTALLINE 156.75 × 156.75MM 72 PCS. (6×12) – 5 BUS BARS		
Model	SEP 330 HC	SEP 335 HC	SEP 340 HC	
<b>Performance at Standard Test Conditions (STC): 1000 W/m<sup>2</sup>, 25°C, AM 1.5, positive power tolerance 0/+3 %</b>				
Maximum Power (Pmax)	330 Wp	335 Wp	340 Wp	
Operating Voltage (Vmpp)	37.7 V	38.0 V	38.3 V	
Operating Current (Impp)	8.76 A	8.82 A	8.89 A	
Open-Circuit Voltage (Voc)	45.9 V	46.2 V	46.4 V	
Short-Circuit Current (Isc)	9.27 A	9.34 A	9.40 A	
Module Efficiency	16.6 %	16.9 %	17.1 %	
<b>Performance at Nominal Operating Cell Temperature (NOCT) : 800 W/m<sup>2</sup>, 20°C, AM 1.5, wind speed 1m/s</b>				
Maximum Power (Pmax)	243 Wp	247 Wp	251 Wp	
Operating Voltage (Vmpp)	34.6 V	34.9 V	35.1 V	
Operating Current (Impp)	7.04 A	7.09 A	7.15 A	
Open-Circuit Voltage (Voc)	42.3 V	42.6 V	42.8 V	
Short-Circuit Current (Isc)	7.51 A	7.56 A	7.61 A	
<b>Temperature Coefficient</b>				
Temperature Coefficient at Pmax	- 0.40 % / °C			
Temperature Coefficient at Voc	- 0.31 % / °C			
Temperature Coefficient at Isc	+ 0.06 % / °C			
Nominal Operating Cell Temperature	45 ± 2 °C			
<b>Operating conditions</b>				
Maximum System Voltage	DC1000 V (IEC) / DC1500 V (IEC)			
Operating Temperature	-40 °C to 85 °C			
Maximum Series Fuse	15 A			
Static Loading	5400 Pa			
Conductivity at Ground	≤ 0.1 Ω			
Resistance	≥ 100 MΩ			
Safety Class	II			

I-V Curves at different irradiance

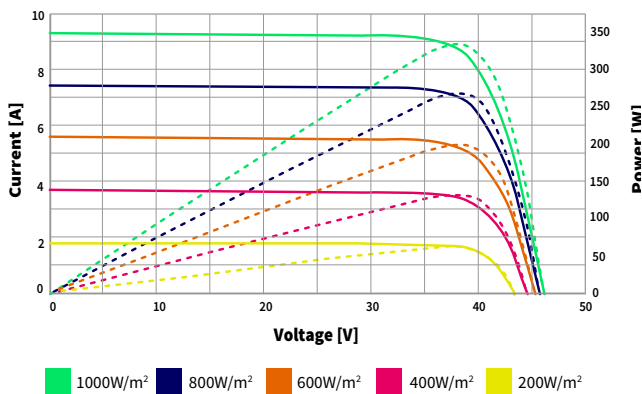

I-V Curves at different temperature

