

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

**Solar Panel Guide
Specification Data Sheet**

**Sunlife Solar Co. Pvt. Ltd
SLS045-50P
SLS045P**


Also available on the web at
EnergyPal.com/sunlife-solar-co-pvt-ltd-solar-panels/sls045p



ELECTRICAL SPECIFICATIONS

Model NO.	SLS035P	SLS040P
Peak power(Pmax)	35W	40W
Maximum power voltage(Vmp)	17.6V	18V
Maximum power current(Imp)	1.98A	2.22A
Short-circuit current(Isc)	2.09A	2.35A
Open circuit voltage(Voc)	21.6V	22.4V
Cell efficiency(η)	15.50%	17.00%
Power tolerance:	±3%	
Operating temperature	-40°C to +85°C	
Maximum system voltage	600VDC	

PHYSICAL CHARACTERISTICS

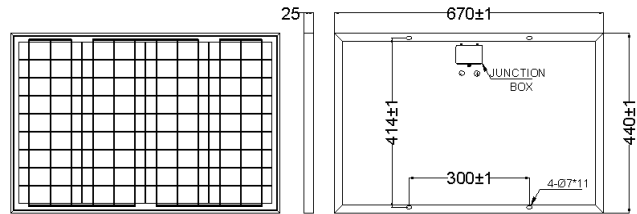

TEMPERATURE COEFFICIENT


Current temperature coefficient	0.037%/°C
Voltage temperature coefficient	-0.34%/°C
Power temperature coefficient	-0.48%/°C

STC: Irradiance of 1000W /m2, AM 1.5, Cell Temperature of 25°C

MECHANICAL SPECIFICATIONS

Cell Type	156mm x 156mm
Number of Cells	36 cells in series
Weight	3.5kg (7.79lbs)
Dimension	440x670x25mm
Max Load	5400 Pascals (112 lb/ft2)
Junction Box	
Cable/Connector	


ELECTRICAL CHARACTERISTICS

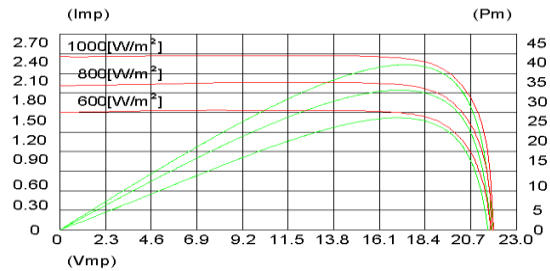

ELECTRICAL SPECIFICATIONS

Model NO.	SLS045P	SLS050P
Peak power(Pmax)	45W	50W
Maximum power voltage(Vmp)	17.8V	18.2V
Maximum power current(Imp)	2.52A	2.75A
Short-circuit current(Isc)	2.67A	2.91A
Open circuit voltage(Voc)	21.6V	22.1V
Cell efficiency(η)	16.00%	17.20%
Power tolerance:	±3%	
Operating temperature	-40°C to +85°C	
Maximum system voltage	600VDC	

PHYSICAL CHARACTERISTICS

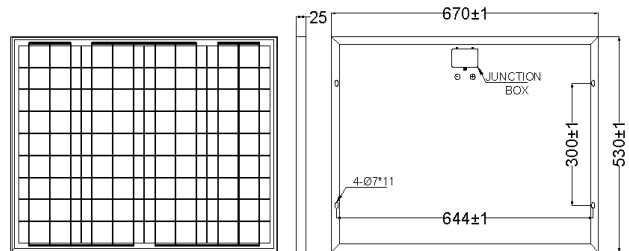

TEMPERATURE COEFFICIENTS


Current temperature coefficient	0.037%/°C
Voltage temperature coefficient	-0.34%/°C
Power temperature coefficient	-0.48%/°C

STC: Irradiance of 1000W /m2, AM 1.5, Cell Temperature of 25°C

MECHANICAL SPECIFICATIONS

Cell Type	156mm x 156mm
Number of Cells	36 cells in series
Weight	4.2kg (9.24lbs)
Dimension	530x670x25mm
Max Load	5400 Pascals (112 lb/ft2)
Junction Box	
Cable/Connector	

ELECTRICAL CHARACTERISTICS

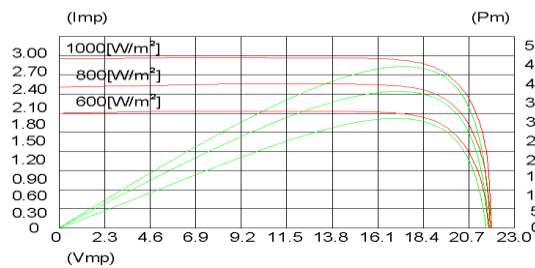

*Due to continuous innovation, research and product improvement, the specifications are subject to change without prior notice.
*The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

25-year performance warranty
5-year warranty on materials and workmanship
The specifications are subject to change without prior notice.