

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Simax (Suzhou) Green New Energy Co., Ltd.

SM672 Black 300-320

SM672-305

Also available on the web at

EnergyPal.com/simax-suzhou-green-new-energy-co-ltd-solar-panels/sm672-305

Product Features



Positive tolerance
Guaranteed tolerance +3%
Reliable power output



High module efficiency
Module efficiency up to 16.5%
Cells efficiency up to 19.2%



Strong compressive strength
Certified to withstand high wind of 2400Pa
and snow loads of 5400Pa



High manufacture standards
certified to high standards by the
most reputable labs According to
IEC:61215: IEC:61730-1/2



International Management System
Manufactured and certified according
to ISO9001, Quality management system



Fire test approved
Application class A, Safety Class II, Fire Rating C




Excellent performance under extreme condition
High salt mist and ammonia resistance



Reliable quality forever
Without potential induced
degradation (PID-free)

Leading Warranty in PV Industry

- 25 year transferrable power output warranty: 10 years / 90%, 25 years / 80%
- Linear performance warranty from SIMAX Power
- 12 year material and workmanship warranty

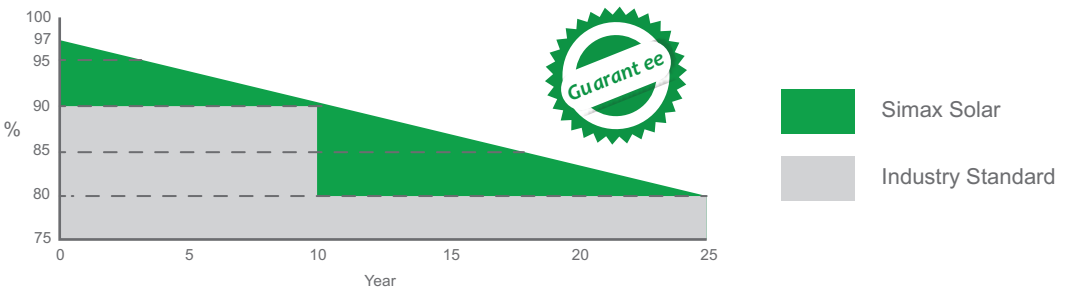

* Please refer to Simax Solar Product Warranty for details.

Electrical Characteristics

Parameters	SM672-300		SM672-305		SM672-310		SM672-315		SM672-320	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Peak power [Wp] P_{mpp}	300W	226W	305W	229W	310W	231W	315W	234W	320W	236W
Open circuit voltage [V] V_{oc}	45.0	41.7	45.5	41.8	45.8	42.0	46.2	42.0	46.4	42.2
Maximum Power Voltage [V] (V_{mpp})	36.8	32.8	37.0	33.0	37.1	33.2	37.3	33.3	37.4	33.4
Maximum Power Current [A] (I_{mpp})	8.15	6.89	8.24	6.94	8.36	6.96	8.45	7.03	8.56	7.07
Short circuit Current [A] (I_{sc})	9.26	7.32	9.41	7.39	9.61	7.44	9.71	7.48	9.75	7.53
Power Tolerance	0~+3%		0~+3%		0~+3%		0~+3%		0~+3%	
Module Efficiency (%)	15.5%		15.7%		16.0%		16.2%		16.5%	

STC: Irradiance : 1000 W/m² ; Spectrum AM 1.5; Cell temperature: 25°C; Wind 0 m/s
 NOCT: Irradiance: 800W/m² ; Spectrum AM 1.5; ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics


Solar Cell	Monocrystalline silicon 156 x 156 (mm)
No. of Cells	72 (6 x 12)
Dimensions	1956 x 992 x 40 mm
Weight	22.5 kg
Front Glass	3.2mm (0.13 inches) tempered glass
Frame	Anodized aluminum alloy

Output



Cable Type	Ø = 4 mm ²
Lengths	L = 900 mm
Junction Box	PV - JB001 MC4

Temperature Coefficients


Nominal Operating Cell Temperature (NOCT)	45 ± 2°C
Temperature Coefficient of (P_{max})	-0.39% / °C
Temperature Coefficient of (V_{oc})	-0.34% / °C
Temperature Coefficient of (I_{sc})	0.035% / °C

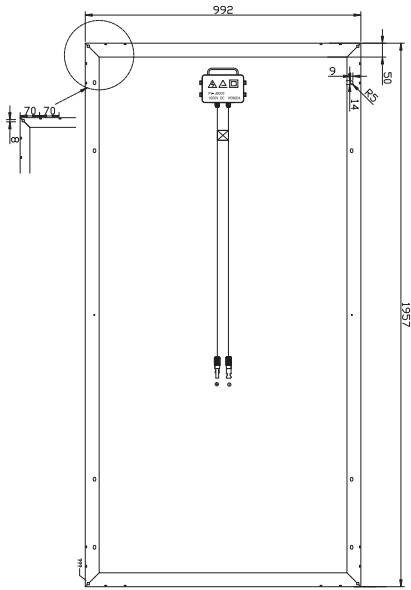

- Provide the best solutions for photovoltaic power generation and technical support
- Provide Cost-effective products
- Provide 12 Years Quality Warranty
- Power out ≥ 90% in 10 years
- Power out ≥ 80% in 25 years



Global standby to ensure response within 24 hours
 Australia and Europe office were established to give better services to customers

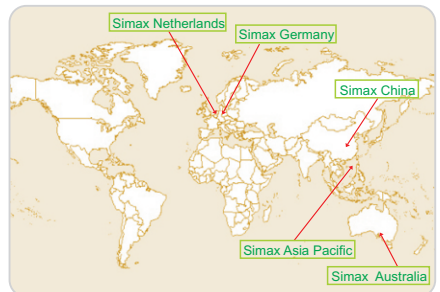

Simax Green New Energy (Europe) GmbH
 Mergenthaler Allee 23 / 25
 65760 Eschborn / Germany
 Tel.: +49 6196 9739 525
 Fax: +49 6196 5929 684
 info@simaxsolar.de
 www.simaxsolar.de



Simax (Australia) Green New Energy Pty Ltd
 5 / 78 Frankston Gardens Drive,
 Carrum Downs, VIC 3210
 Tel: +61 3 9708 2400
 Fax: +61 3 9708 2482
 info@simaxsolar.com.au
 www.simaxsolar.com.au

