

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Shenzhen Shine Solar Co., Ltd.

SN-M040

SN-M040

Also available on the web at
EnergyPal.com/shenzhen-shine-solar-co-ltd-solar-panels/sn-m040

Datasheet

40Wp

Monocrystalline solar PV module




Model Number	SN-M040
Maximum Power (pmax)	40Wp
Optimum Operating Voltage/Vmp	18.0V
Optimum Operating Current/Imp	2.22A
Open Circuit Voltage /Voc	21.6V
Short Circuit Current /Isc	2.32A
Module Efficiency	14.5%
Power Tolerance (%)	±3
Maximum Series Fuse Rating	15A
Maximum system voltage	1000 V DC

Maximum Data		
Operating Temperature	-40°C~+80°C	°C
Storage temperature	from -40°C ~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m ² or max Km/h
Surface maximum load capacity	200	Kg/m ²
Maximum hail load capacity	25mm	80km/h


EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

Physical Characteristics

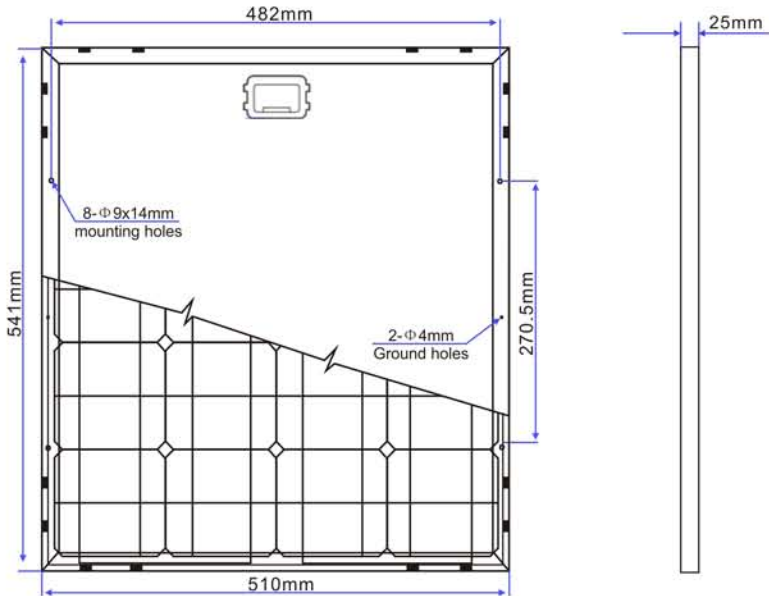

I-V Curve

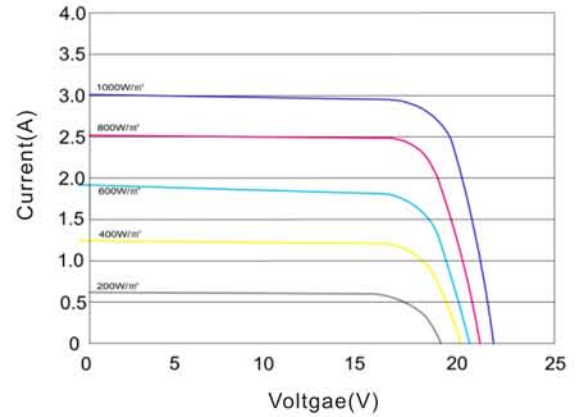

Laminating Data

Cell dimension (mm)	125 x 62.5
Dimensions (mm)	541x510x25
Number of cells	36(4*9)
Weight	3.5Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65


STC

AM condition	AM1.5
Intensity of illumination	1000W/m ²
temperature	25°C

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

Superior Warranty

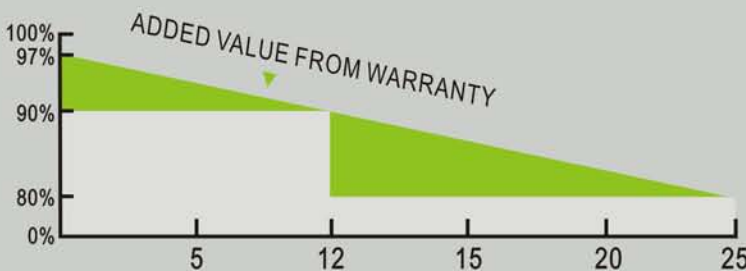

- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.