

**For a Free Quote:**

Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)

Call: 1-800-990-3725

Email: [contact@energypal.com](mailto:contact@energypal.com)

# EnergyPal

## **Solar Panel Guide Specification Data Sheet**

**Shenzhen Shine Solar Co., Ltd.**

**SN-M130-135**

**SN-M130**

Also available on the web at  
[EnergyPal.com/shenzhen-shine-solar-co-ltd-solar-panels/sn-m130](http://EnergyPal.com/shenzhen-shine-solar-co-ltd-solar-panels/sn-m130)



# Datasheet

130Wp — 135Wp

Monocrystalline solar PV module

Model Number	SN-M130	SN-M135
Maximum Power (pmax)	130Wp	135Wp
Optimum Operating Voltage/Vmp	18.0V	18.0V
Optimum Operating Current/Imp	7.22A	7.5A
Open Circuit Voltage /Voc	21.6V	21.6V
Short Circuit Current /Isc	7.42A	7.7A
Module Efficiency	15.2%	15.7%
Power Tolerance (%)	±3	
Maximum Series Fuse Rating	15A	
Maximum system voltage	1000 V DC	


## Maximum Data

Operating Temperature	-40°C~+80°C	°C
Storage temperature	from -40°C ~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m <sup>2</sup> or max Km/h
Surface maximum load capacity	200	Kg/m <sup>2</sup>
Maximum hail load capacity	25mm	80km/h


## EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

## Physical Characteristics

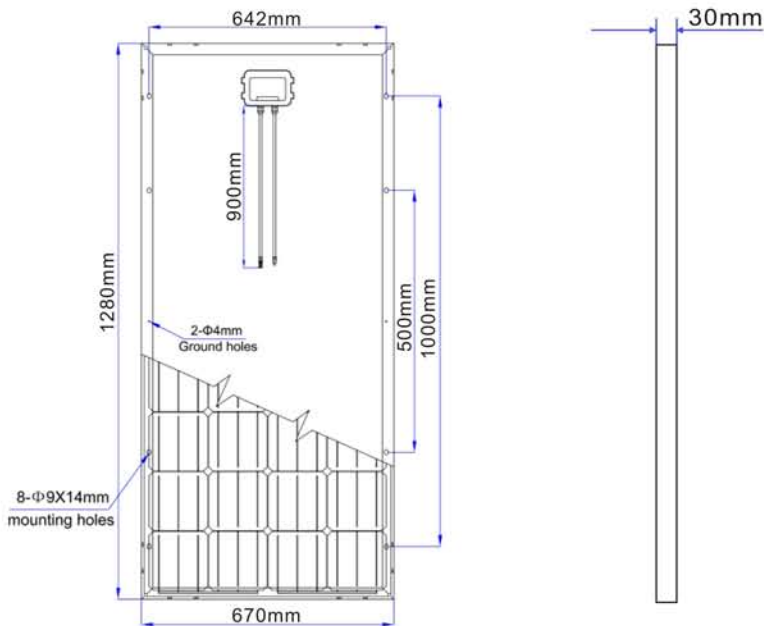

## I-V Curve

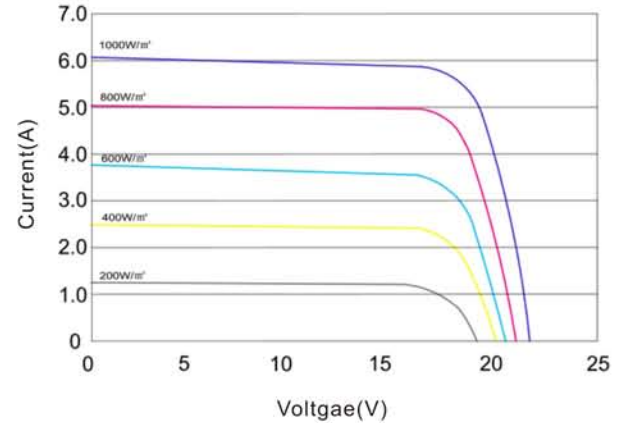

## Laminating Data

Cell dimension (mm)	156 x 134
Dimensions (mm)	670x1280x30
Number of cells	36(4*9)
Weight	12.7Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65


## STC

AM condition	AM1.5
Intensity of illumination	1000W/m <sup>2</sup>
temperature	25°C

## Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

## Superior Warranty

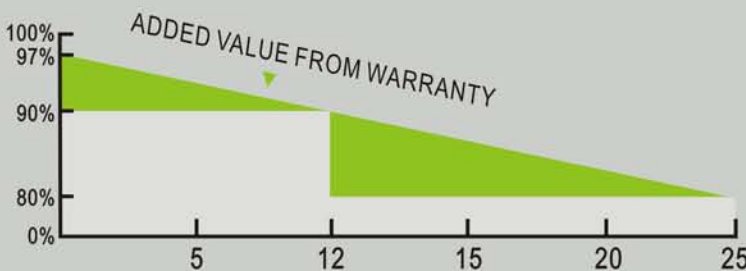

- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.